

Screw Distance Clamp

with female connection thread M6




SAS 20 V

EAN Code: 4013339733705

Smallest packaging unit: 50 pcs.



the photorealistic images are to be considered as reference images

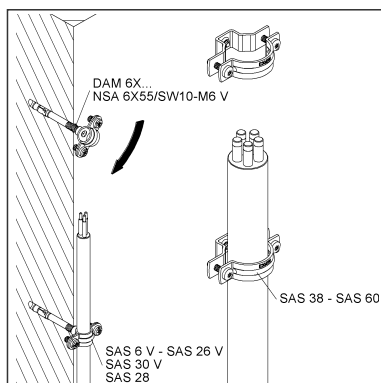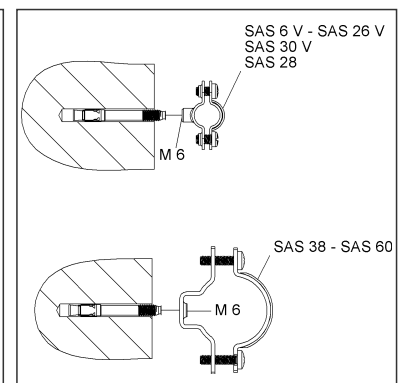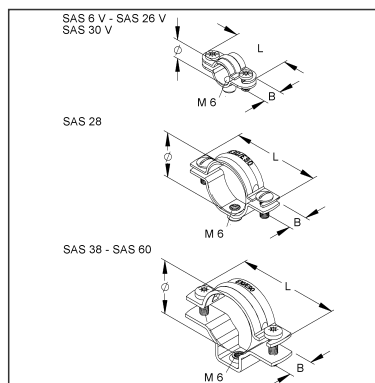

Article Description

Screw distance clamp, for cables-Ø 19-21 mm, steel, electro galvanised according DIN EN ISO 2081, blue passivated

Technical Datasheet

Conduit and cable distance clamps

SAS 20 V

the photorealistic images are to be considered as reference images

Additional Price Information

Article group	N06
quantity unit	pcs.

Weight

Weight per quantity unit	15 g / pcs.
Weight in kg per 100	1,46 kg / 100pcs.

Physical Article Dimensions

Height	8.00 mm
Width	45.00 mm
Depth/length	12.00 mm

Packing Dimension

50 pieces = 1 carton		✓ VP1-smallest packaging unit (PU) ✓ VP1-preferred PU			
Lenght	180.00 mm	Width	90.00 mm	Height	45.00 mm
Gross weight	0,73 kg	Volume	0,001 m³		
Min. quantity	50.00 pcs.	Max. Quantity	50.00 pcs.		

15600 pieces = 1 pallet					
Lenght	1200 mm	Width	800 mm	Height	420 mm
Gross weight	243 kg	Volume	0,403 m³		
Min. Quantity	15.600.00 pcs.	Max. Quantity	15.600.00 pcs.		

Tender Text

Conduit- and cable distance clamp, with M 6 internal thread, for screwing onto screw anchors up to 8 mm thread length, when installing on push-through anchors DAM 6X... or screw anchor NSA 6X55/SW10-M6, care must be taken to ensure that the connection thread of the push-through anchor does not protrude into the clamping area of the cable.

Please observe additional regulations for use in functional maintenance!

Used for: cables and electrical conduits according to DIN EN 61386-21

Dimensions (approx. dimensions)

Width W x length L : 12 x 45 mm

Internal connection thread : M 6

for cable clamping range-Ø : 19 - 21 mm

for pipe-Ø : 20 mm

Material : steel, galvanised according to DIN EN ISO 15958, blue passivated

Material screws : steel, galvanised according to DIN EN ISO 4042, blue passivated

Niedax Model-No. : SAS 20 V

EP Material_____ EP Wage_____

Unit price/piece

Technical Datasheet

Conduit and cable distance clamps

SAS 20 V

the photorealistic images are to be considered as reference images

Safety & Environment

REACH Date	27.06.2024
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	
Customs tariff number	73269098