

Technical Datasheet

Cable Ladder System

KL 100.203


the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	100.00 mm
Width	200.00 mm
Depth/length	6000 mm

Load Specifications

Load diagram: q = evenly distributed cable load (tested acc. to DIN EN IEC 61537)

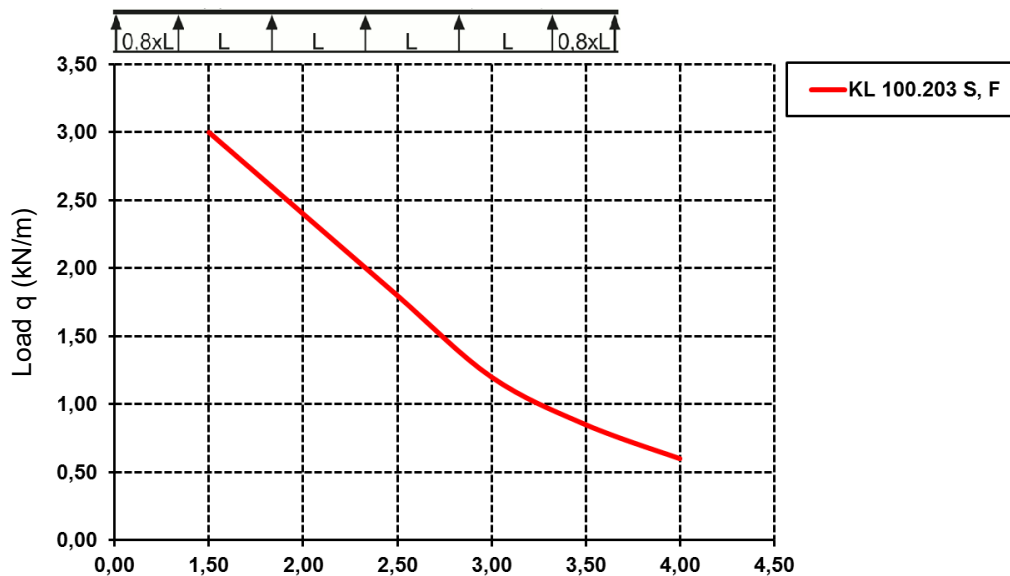

Fixing distance (m)

The load details shown in the diagram are independent of the position of the connectors.

Packing Dimension

6 meters = 1 piece		✓ VP1-smallest packaging unit (PU)	✓ VP1-preferred PU		
Length	6000 mm	Width	200.00 mm	Height	100.00 mm
Gross weight	21 kg	Volume	0,120 m ³		
Min. quantity	6.00 m	Max. Quantity	6.00 m		

Tender Text

Cable ladder acc. to DIN EN 61537, with continuously perforated and profiled side beams, with riveted rungs made of C-profiles with 11 mm slot width. Suitable U-clamps (BA... and BAK...).

Dimensions (approx. dimensions) H x W : 100 x 200 mm

Material thickness beam : 1.5 mm

Distance between rungs : 300 mm

Side beam perforation : 9 x 15 mm

Centre

distance : 25 mm

Bottom perforation : \varnothing 8.5 and \varnothing 5.4 mm Centre distance : 100 mm and 50 mm

Delivery length L : 6000 mm Transport length : 6000 mm + B

Usable cross-section : 16500 mm²

Material : Steel, pre-galvanised acc. to DIN EN 10346

NIEDAX Model No. KL 100.203

Technical Datasheet

Cable Ladder System

KL 100.203

the photorealistic images are to be considered as reference images

Tender Text

EP Material _____ EP Wage _____
Unit price/meter

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Federal State of Origin	RP
Customs tariff number	73089059

Related items

Cover

Model No.	Description
RD 200	Cover for cable tray/-ladder, with joint strip, 202x3000 mm, steel, pre-galvanised according to DIN EN 10346
RDRS 9	Turning bolt with locking nut acc. to DIN EN ISO 10511, steel, pre-galvanised according to DIN EN 10346, incl. accessories
RDV 200	Cover for cable tray/-ladder, with joint strip, 202x3000 mm, steel, pre-galvanised according to DIN EN 10346

Barrier strip

Model No.	Description
KLWC 11	Barrier strip fastening clamp, for 11 mm slot width, steel, pre-galvanised according to DIN EN 10346, incl. accessories
RW 85	Barrier strip, 80x3000 mm, t=0,9 mm, steel, pre-galvanised according to DIN EN 10346, incl. accessories

Connector

Model No.	Description
KSV 100 S	Splice plate for cable ladder, height 100 mm, steel, pre-galvanised according to DIN EN 10346, incl. accessories