



**C-Profile Type 2996Z**

C-profile, slot width 22 mm, perforated

**2996Z/4500 E3L**

EAN Code: 4013339078646  
 Smallest packaging unit: 1 pc.

the photorealistic images are to be considered as reference images

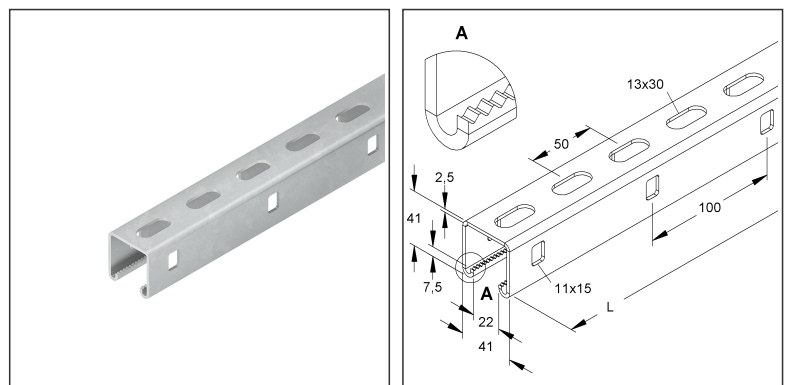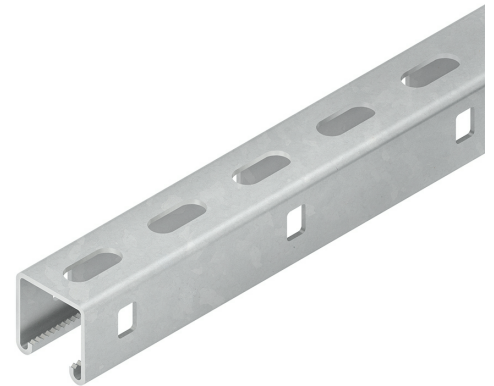

**Article Description**

C-profile, slot width 22 mm, 41x41x4500 mm, perforated, stainless steel, material code: 1.4301, 1.4303, interlocked

**Weight**

Weight per quantity unit	11 kg / pcs.
Weight in kg per 100	1092 kg / 100pcs.

**Physical Article Dimensions**

Height	41.00 mm
Width	41.00 mm
Depth/length	4500 mm

# Technical Datasheet

## Niedax rails

### 2996Z/4500 E3L

the photorealistic images are to be considered as reference images

#### Additional Price Information

Article group	N13
quantity unit	pcs.

#### Packing Dimension

<b>1 piece = 1 piece</b>		<input checked="" type="checkbox"/> VP1-smallest packaging unit ( PU)			
Lenght	4500 mm	Width	41.00 mm	Height	41.00 mm
Gross weight	11 kg	Volume	0,008 m <sup>3</sup>		
Min. quantity	1.00 pcs.	Max. Quantity	1.00 pcs.		

#### Tender Text

C-profile model 2996Z with tothing, bottom and sides continuously perforated. Sliding nut GMZ M...-22 E5 and screws must be ordered separately. Suitable U-clamps (BU... and BUK...). The protective cap SKC 88/96 must be fitted in personal danger areas. To ensure that the protective cap can be fitted without problems, a distance of at least 30 mm from the end of the profile must be maintained.

Dimensions (approx. dimensions)

Height H x width W x material thickness t : 41 x 41 x 2.5 mm

Slot width : 22 mm

Profile bottom perforation : 13 x 30 mm

central distance : 50 mm

Profile side perforation : 11 x 15 mm

central distance : 100 mm

Delivery length L : 4500 mm

Material : stainless steel, material No. 1.4301, AISI 304

NIEDAX Model No. : 2996Z/4500 E3L

EP Material\_\_\_\_\_ EP Wage\_\_\_\_\_

Unit price/piece

#### Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

#### Origin & International Trade

Country of origin	DE
Customs tariff number	73269098