


Cable Protection Duct

with perforated bottom, incl. cover without barrier wall

HKL60130.6

EAN Code: 4011126211412
 Smallest packaging unit: 16 m
 quantity unit: m M

the photorealistic images are to be considered as reference images

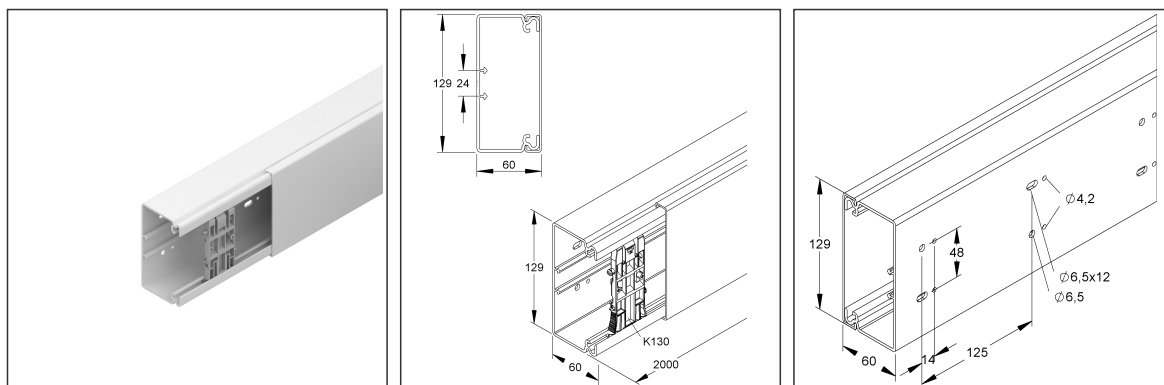

Article Description

HKL-cable protection duct, with bottom perforation, 60x129x2000 mm, plastics PVC-hard, RAL 9001, cream white, incl. accessories

Incl. accessories

4 x K130

Additional Price Information

Article group	K640
quantity unit	m

Weight

Weight per quantity unit	1,614 kg / m
Weight in kg per 100	161 kg / 100m

Technical Datasheet

Cable routing duct

HKL60130.6

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	128.30 mm
Width	60.00 mm
Depth/length	2000 mm

Packing Dimension

2 meters = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	2000 mm	Width	60.00 mm	Height	129.00 mm
Gross weight	3,23 kg	Volume	0,015 m ³		
Min. quantity	2.00 m	Max. Quantity	2.00 m		

16 meters = 1		✓ VP2-preferred PU			
Lenght	2010 mm	Width	265 mm	Height	250 mm
Gross weight	27 kg	Volume	0,133 m ³		
Min. Quantity	16.00 m	Max. Quantity	16.00 m		

144 meters = 1 rack					
Lenght	2090 mm	Width	1055 mm	Height	1090 mm
Gross weight	327 kg	Volume	2,403 m ³		
Min. Quantity	144.00 m	Max. Quantity	144.00 m		

Tender Text

Electrical installation trunking, with cover and double-row, alternating fixing holes in the base, without barrier wall, mounting profile in the base for 2 barrier walls, including 4 retaining clips K... each 2 m delivery length, halogen-containing.

VDE certified!

Retaining clips : 4 x K130

Dimensions (approx. dimensions)

Height H x width W : 60 x 129 mm

double row of holes in the base : Ø 6.5 x 12 mm, Ø 6.5 mm and 2 x Ø 4.2 mm

Base hole spacing grid spacing : 125 mm

Row spacing : 48 mm

Delivery length L : 2000 mm

Usable cross-section : 4674 mm²

Material : PVC-hard (polyvinyl chloride)

Colour : cream white

RAL : 9001 (similar)

Kleinhuis Model no. : HKL60130.6

EP Material _____ EP Wage _____

Unit price/metre

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Technical Datasheet

Cable routing duct

HKL60130.6

the photorealistic images are to be considered as reference images

Origin & International Trade

Country of origin	DE
Customs tariff number	39259020

Related items

Cover

Model No.	Description
HKLD01/130.6	Perforated cover section single, width 130 mm, combination frame, plastics PVC-hard, RAL 9001, cream white
HKLD02/130.6	Perforated cover section double, width 130 mm, combination frame, plastics PVC-hard, RAL 9001, cream white
HKLD03/130.6	Perforated cover section triple, width 130 mm, combination frame, plastics PVC-hard, RAL 9001, cream white
HKLD1P1/130.6	Perforated cover section single, width 130 mm, CEE plug devices, P1, plastics PVC-hard, RAL 9001, cream white
HKLD1P2/130.6	Perforated cover section single, width 130 mm, CEE plug devices, P2, plastics PVC-hard, RAL 9001, cream white
SVO130.6	Joint cover, width 130 mm, turning over 16 mm, plastics ASA, RAL 9001, cream white

Barrier strip

Model No.	Description
BTR65	Barrier wall, 49x2000 mm, plastics PVC-hard