

### Cable Protection Duct

with perforated bottom, incl. cover without barrier wall


### HKL60150.6

EAN Code: 4011126211399

Smallest packaging unit: 8 m

quantity unit: m M

the photorealistic images are to be considered as reference images

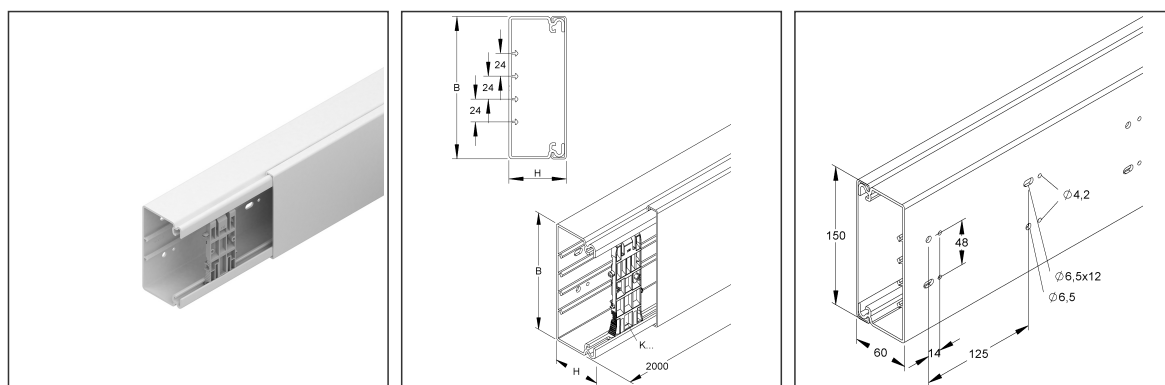

#### Article Description

HKL-cable protection duct, with bottom perforation, 60x150x2000 mm, plastics PVC-hard, RAL 9001, cream white, incl. accessories

#### Incl. accessories

4 x K150

#### Additional Price Information

Article group	K640
quantity unit	m

#### Weight

Weight per quantity unit	1,871 kg / m
Weight in kg per 100	187 kg / 100m

# Technical Datasheet

## Cable routing duct

HKL60150.6

the photorealistic images are to be considered as reference images

### Physical Article Dimensions

Height	150.00 mm
Width	60.00 mm
Depth/length	2000 mm

### Packing Dimension

<b>2 meters = 1 piece</b>		✓ VP1-smallest packaging unit ( PU)			
Lenght	2000 mm	Width	60.00 mm	Height	150.00 mm
Gross weight	3,74 kg	Volume	0,018 m <sup>3</sup>		
Min. quantity	2.00 m	Max. Quantity	2.00 m		
<b>8 meters = 1</b>		✓ VP2-preferred PU			
Lenght	2010 mm	Width	155.00 mm	Height	243 mm
Gross weight	16 kg	Volume	0,076 m <sup>3</sup>		
Min. Quantity	8.00 m	Max. Quantity	8.00 m		
<b>120 meters = 1 rack</b>					
Lenght	2090 mm	Width	1055 mm	Height	1090 mm
Gross weight	323 kg	Volume	2,403 m <sup>3</sup>		
Min. Quantity	120.00 m	Max. Quantity	120.00 m		

### Tender Text

Electrical installation trunking, with cover and double-row, alternating fixing holes in the base, without barrier wall, mounting profile in the base for 4 barrier walls, including 4 retaining clips K... each 2 m delivery length, halogen-containing.  
 VDE certified!  
 Retaining clips : 4 x K150  
 Dimensions (approx. dimensions)  
 Height H x width W : 60 x 150 mm  
 double row of holes in the base : Ø 6.5 x 12 mm, Ø 6.5 mm and 2 x Ø 4.2 mm  
 Base hole spacing grid spacing : 125 mm  
 Row spacing : 48 mm  
 Delivery length L : 2000 mm  
 Usable cross-section : 5472 mm<sup>2</sup>  
 Material : PVC-hard (polyvinyl chloride)  
 Colour : cream white  
 RAL : 9001 (similar)  
 Kleinhuis Model no.: HKL60150.6  
 EP Material\_\_\_\_\_ EP Wage\_\_\_\_\_  
 Unit price/metre

### Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

# Technical Datasheet

## Cable routing duct

HKL60150.6

the photorealistic images are to be considered as reference images

### Origin & International Trade

Country of origin	DE
Customs tariff number	39259020

### Related items

#### Cover

Model No.	Description
HKLD01/150.6	Perforated cover section single, width 150 mm, combination frame, plastics PVC-hard, RAL 9001, cream white
HKLD02/150.6	Perforated cover section double, width 150 mm, combination frame, plastics PVC-hard, RAL 9001, cream white
HKLD03/150.6	Perforated cover section triple, width 150 mm, combination frame, plastics PVC-hard, RAL 9001, cream white
HKLD1P1/150.6	Perforated cover section single, width 150 mm, CEE plug devices, P1, plastics PVC-hard, RAL 9001, cream white
HKLD1P2/150.6	Perforated cover section single, width 150 mm, CEE plug devices, P2, plastics PVC-hard, RAL 9001, cream white
SVO150.6	Joint cover, width 150 mm, turning over 16 mm, plastics ASA, RAL 9001, cream white

#### Barrier strip

Model No.	Description
BTR65	Barrier wall, 49x2000 mm, plastics PVC-hard