

Cable Protection Duct

with perforated bottom, incl. cover without barrier wall


HKL60190.6

EAN Code: 4011126211375

Smallest packaging unit: 8 m

quantity unit: m M

the photorealistic images are to be considered as reference images

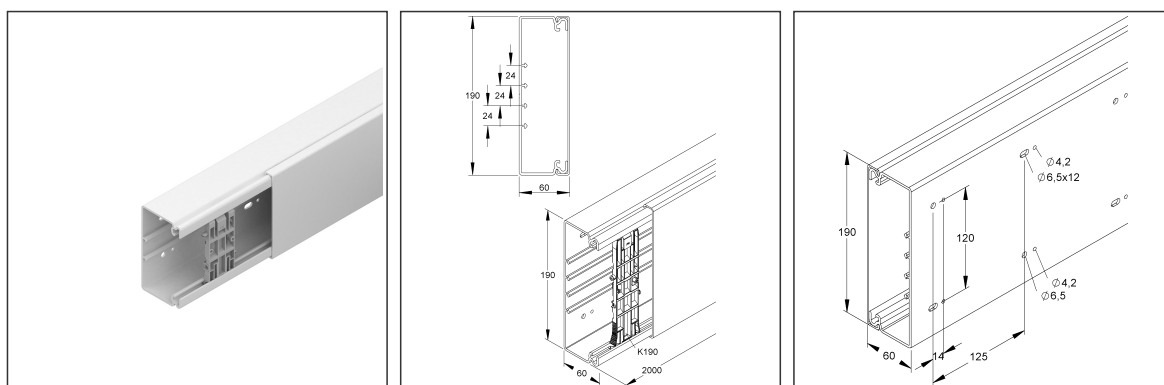

Article Description

HKL-cable protection duct, with bottom perforation, 60x190x2000 mm, plastics PVC-hard, RAL 9001, cream white, incl. accessories

Incl. accessories

4 x K190

Additional Price Information

Article group	K640
quantity unit	m

Weight

Weight per quantity unit	2,267 kg / m
Weight in kg per 100	227 kg / 100m

Technical Datasheet

Cable routing duct

HKL60190.6

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	189.50 mm
Width	60.00 mm
Depth/length	2000 mm

Packing Dimension

2 meters = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	2000 mm	Width	60.00 mm	Height	190.00 mm
Gross weight	4,53 kg	Volume	0,023 m ³		
Min. quantity	2.00 m	Max. Quantity	2.00 m		
8 meters = 1		✓ VP2-preferred PU			
Lenght	2010 mm	Width	195.00 mm	Height	245 mm
Gross weight	20 kg	Volume	0,096 m ³		
Min. Quantity	8.00 m	Max. Quantity	8.00 m		
96 meters = 1 rack					
Lenght	2090 mm	Width	1055 mm	Height	1090 mm
Gross weight	321 kg	Volume	2,403 m ³		
Min. Quantity	96.00 m	Max. Quantity	96.00 m		

Tender Text

Electrical installation trunking, with cover and double-row, alternating fixing holes in the base, without barrier wall, mounting profile in the base for 4 barrier walls, including 4 retaining clips K... each 2 m delivery length, halogen-containing.

VDE certified!

Retaining clips : 4 x K190

Dimensions (approx. dimensions)

Height H x width W : 60 x 190 mm

double row of holes in the base : Ø 6.5 x 12 mm, Ø 6.5 mm and 2 x Ø 4.2 mm

Base hole spacing grid spacing : 125 mm

Row spacing : 120 mm

Delivery length L : 2000 mm

Usable cross-section : 6992 mm²

Material : PVC-hard (Polyvinylchloride)

Colour : cream white

RAL : 9001 (similar)

Kleinhuis Model-No.: HKL60190.6

EP Material _____ EP Wage _____

Unit price/metre

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Technical Datasheet

Cable routing duct

HKL60190.6

the photorealistic images are to be considered as reference images

Origin & International Trade

Country of origin	DE
Customs tariff number	39259020

Related items

Cover

Model No.	Description
HKLD01/190.6	Perforated cover section single, width 190 mm, combination frame, plastics PVC-hard, RAL 9001, cream white
HKLD02/190.6	Perforated cover section double, width 190 mm, combination frame, plastics PVC-hard, RAL 9001, cream white
HKLD03/190.6	Perforated cover section triple, width 190 mm, combination frame, plastics PVC-hard, RAL 9001, cream white
HKLD1P1/190.6	Perforated cover section single, width 190 mm, CEE plug devices, P1, plastics PVC-hard, RAL 9001, cream white
HKLD1P2/190.6	Perforated cover section single, width 190 mm, CEE plug devices, P2, plastics PVC-hard, RAL 9001, cream white
SVO190.6	Joint cover, width 190 mm, turning over 17 mm, plastics ASA, RAL 9001, cream white

Barrier strip

Model No.	Description
BTR65	Barrier wall, 49x2000 mm, plastics PVC-hard