

Cable Protection Duct

with perforated bottom, incl. cover without barrier wall


HKL60230.6

EAN Code: 4011126298932

Smallest packaging unit: 8 m

quantity unit: m M

the photorealistic images are to be considered as reference images

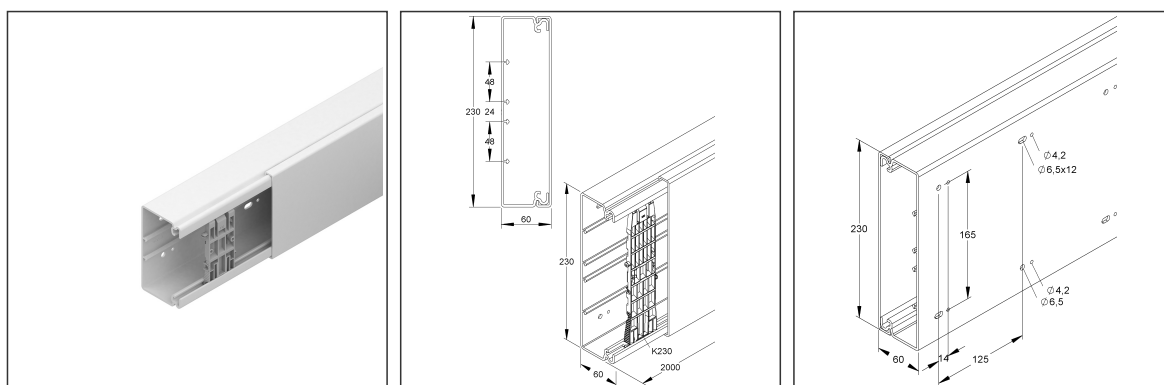

Article Description

HKL-cable protection duct, with bottom perforation, 60x230x2000 mm, plastics PVC-hard, RAL 9001, cream white, incl. accessories

Incl. accessories

4 x K230

Additional Price Information

Article group	K640
quantity unit	m

Weight

Weight per quantity unit	2,903 kg / m
Weight in kg per 100	290 kg / 100m

Technical Datasheet

Cable routing duct

HKL60230.6

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	230 mm
Width	59.70 mm
Depth/length	2000 mm

Packing Dimension

2 meters = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	2000 mm	Width	60.00 mm	Height	231 mm
Gross weight	5,81 kg	Volume	0,028 m ³		
Min. quantity	2.00 m	Max. Quantity	2.00 m		
8 meters = 1		✓ VP2-preferred PU			
Lenght	2010 mm	Width	235 mm	Height	250 mm
Gross weight	25 kg	Volume	0,118 m ³		
Min. Quantity	8.00 m	Max. Quantity	8.00 m		
72 meters = 1 rack					
Lenght	2090 mm	Width	1055 mm	Height	1090 mm
Gross weight	303 kg	Volume	2,403 m ³		
Min. Quantity	72.00 m	Max. Quantity	72.00 m		

Tender Text

Electrical installation trunking, with cover and double-row, alternating fixing holes in the base, without partition, mounting profile in base for 4 partitions, including 4 retaining clips K... each 2 m delivery length, halogen-containing. VDE certified!

Retaining clips : 4 x K230
 Dimensions (approx. dimensions)
 Height H x width W : 60 x 230 mm
 double row of holes in the base : Ø 6.5 x 12 mm, Ø 6.5 mm and 2 x Ø 4.2 mm
 Base hole spacing grid spacing : 125 mm
 Row spacing : 165 mm
 Delivery length L : 2000 mm
 Usable cross-section : 8512 mm²
 Material : PVC-hard (polyvinyl chloride)
 Colour : cream white
 RAL : 9001 (similar)
 Kleinhuis Model-No. : HKL60230.6
 EP Material _____ EP Wage _____
 Unit price/metre

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Technical Datasheet

Cable routing duct

HKL60230.6

the photorealistic images are to be considered as reference images

Origin & International Trade

Country of origin	DE
Customs tariff number	39259020

Related items

Cover

Model No.	Description
HKLD01/230.6	Perforated cover section single, width 230 mm, combination frame, plastics PVC-hard, RAL 9001, cream white
HKLD02/230.6	Perforated cover section double, width 230 mm, combination frame, plastics PVC-hard, RAL 9001, cream white
HKLD03/230.6	Perforated cover section triple, width 230 mm, combination frame, plastics PVC-hard, RAL 9001, cream white
HKLD1P1/230.6	Perforated cover section single, width 230 mm, CEE plug devices, P1, plastics PVC-hard, RAL 9001, cream white
HKLD1P2/230.6	Perforated cover section single, width 230 mm, CEE plug devices, P2, plastics PVC-hard, RAL 9001, cream white
SVO230.6	Joint cover, width 230 mm, turning over 18 mm, plastics ASA, RAL 9001, cream white

Barrier strip

Model No.	Description
BTR65	Barrier wall, 49x2000 mm, plastics PVC-hard