

### Vertical Cable Ladder

rung spacing 300 mm, with continuously perforated side profiles



### STL 60.603/6 F

EAN Code: 4013339921782

Smallest packaging unit: 6 m

quantity unit: m M

the photorealistic images are to be considered as reference images

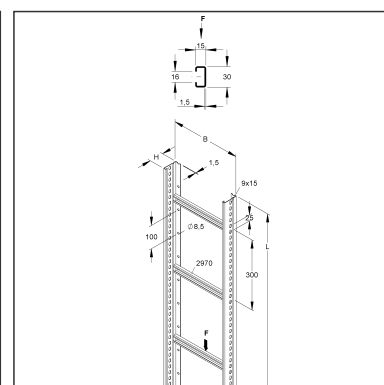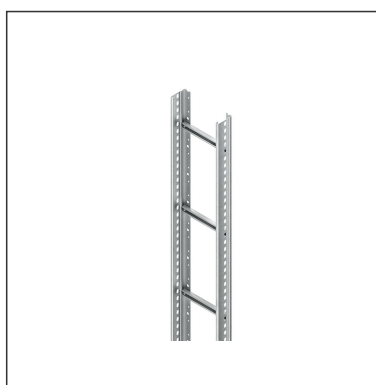

### Article Description

Vertical cable ladder, 60x600x6000 mm, rung distance 300 mm, steel, hot dip galvanised DIN EN ISO 1461

### Additional Price Information

Article group	N13
quantity unit	m

### Weight

Weight per quantity unit	4,062 kg / m
Weight in kg per 100	406 kg / 100m

### Physical Article Dimensions

Height	60.00 mm
Width	599 mm
Depth/length	6000 mm

# Technical Datasheet

## Vertical Cable Ladder System

STL 60.603/6 F

the photorealistic images are to be considered as reference images

### Packing Dimension

<b>6 meters = 1 piece</b>		✓ VP1-smallest packaging unit ( PU)		✓ VP1-preferred PU	
Lenght	6000 mm	Width	599 mm	Height	60.00 mm
Gross weight	24 kg	Volume	0,216 m <sup>3</sup>		
Min. quantity	6.00 m	Max. Quantity	6.00 m		

### Tender Text

Vertical cable ladder acc. to DIN EN 61537, for wall mounting, with continuously perforated and profiled side rails, with riveted rungs made of C-profiles with 16 mm slot width. Corresponding U-clamps: B... and BK...

Dimensions (approx. dimensions)

Height H x width W : 60 x 600 mm

Material thickness side rail : 1.5 mm

Rung distance : 300 mm

Side rail perforation : 9 x 15 mm

Center distance : 25 mm

Base perforation : Ø 8.5 mm

Center distance : 100 mm

Load capacity with B/2 : 1.0 kN

Delivery length L : 6000 mm

Usable cross section : 25900 mm<sup>2</sup>

Material : steel, hot-dip galvanised acc. to DIN EN ISO 1461

NIEDAX Model No. : STL 60.603/6 F

EP material \_\_\_\_\_ EP wage \_\_\_\_\_

Unit price/meter

### Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

### Origin & International Trade

Country of origin	DE
Customs tariff number	73089059

### Related items

#### Cover

Model No.	Description
RDHFS 9 VZL	Cover clamp, steel, electro galvanised according to DIN EN ISO 2081, blue passivate
STVW 600 F	Vertical cable ladder cover, 203x609x3000 mm, wall mounting, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories

# Technical Datasheet

## Vertical Cable Ladder System

STL 60.603/6 F

the photorealistic images are to be considered as reference images

### Related items

#### Barrier strip

Model No.	Description
KLWC 16 F	Barrier strip fastening clamp, for 16 mm slot width, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories
RW 35 F	Barrier strip, 30x3000 mm, t=0,75 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories

#### Connector

Model No.	Description
KSV 60 F	Splice plate for cable ladder, height 60 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories