

### Vertical Cable Ladder

rung spacing 600 mm, with continuously perforated side profiles

### STM 60.206/6 F



EAN Code: 4013339586707

Smallest packaging unit: 6 m

quantity unit: m M



the photorealistic images are to be considered as reference images

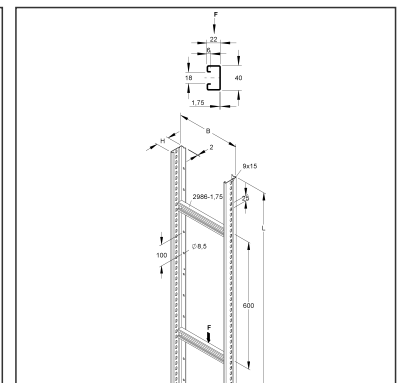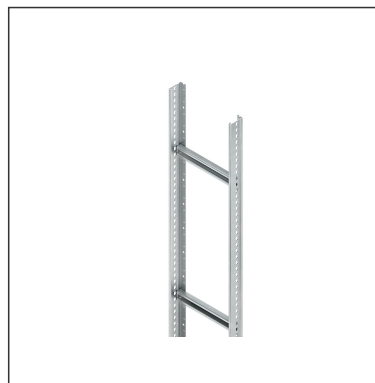

### Article Description

Vertical cable ladder, 60x200x6000 mm, rung distance 600 mm, steel, hot dip galvanised DIN EN ISO 1461

### Additional Price Information

Article group	N13
quantity unit	m

### Weight

Weight per quantity unit	3,661 kg / m
Weight in kg per 100	366 kg / 100m

### Physical Article Dimensions

Height	60.00 mm
Width	199.00 mm
Depth/length	6000 mm

# Technical Datasheet

## Vertical Cable Ladder System

STM 60.206/6 F

the photorealistic images are to be considered as reference images

### Packing Dimension

<b>6 meters = 1 piece</b>		✓ VP1-smallest packaging unit ( PU)		✓ VP1-preferred PU	
Lenght	6000 mm	Width	199.00 mm	Height	60.00 mm
Gross weight	22 kg	Volume	0,072 m³		
Min. quantity	6.00 m	Max. Quantity	6.00 m		

### Tender Text

Vertical cable ladder acc. to DIN EN 61537, for wall mounting, with continuously perforated and profiled side rails, with riveted rungs made of C-profiles with 18 mm slot width. Corresponding U-clamps: BU... and BUK...

Dimensions (approx. dimensions)  
 Height H x width W : 60 x 200 mm  
 Material thickness side rail : 2 mm  
 Rung distance : 600 mm  
 Side rail perforation : 9 x 15 mm  
 Center distance : 25 mm  
 Base perforation : Ø 8.5 mm  
 Center distance : 100 mm  
 Load capacity with B/2 : 1.75 kN  
 Delivery length L : 6000 mm  
 Usable cross-section : 7000 mm²  
 Material : Steel, hot-dip galvanised acc. to DIN EN ISO 1461  
 NIEDAX Model No. : STM 60.206/6 F  
 EP Material \_\_\_\_\_ EP Wage \_\_\_\_\_  
 Unit price/meter

### Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

### Origin & International Trade

Country of origin	DE
Customs tariff number	73089059

### Related items

#### Cover

Model No.	Description
RDHFS 9 VZL	Cover clamp, steel, electro galvanised according to DIN EN ISO 2081, blue passivate
STVW 200 F	Vertical cable ladder cover, 203x209x3000 mm, wall mounting, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories

# Technical Datasheet

## Vertical Cable Ladder System

STM 60.206/6 F

the photorealistic images are to be considered as reference images

### Related items

#### Barrier strip

Model No.	Description
KLWC 18 F	Barrier strip fastening clamp, for 18 mm slot width, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories
RW 35 F	Barrier strip, 30x3000 mm, t=0,75 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories

#### Connector

Model No.	Description
KSV 60 F	Splice plate for cable ladder, height 60 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories