


Conduit- and Cable Distance Clamp

with female connection thread M6

IPA 16 G F

EAN Code: 4046933001789
Smallest packaging unit:50 pcs.

the photorealistic images are to be considered as reference images

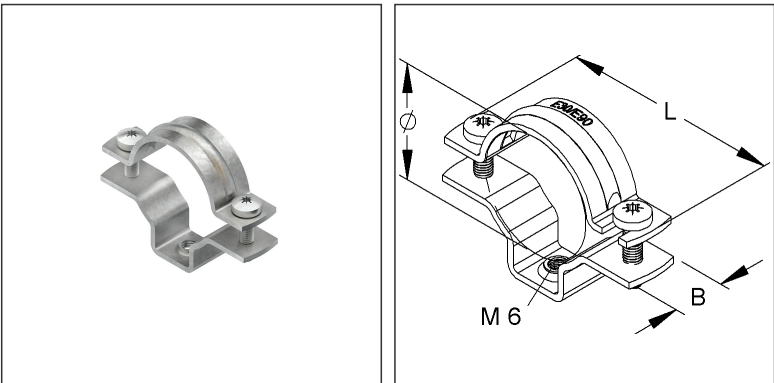

Article Description

Conduit- c. distance clamp, pipe-Ø16 mm,cab. clamping range -Ø15-19 mm, steel, hot dip galvanised DIN EN ISO 1461, with theread M6

Additional Price Information

Article group	FT-Rohr
quantity unit	pcs.

Weight

Weight per quantity unit	26 g / pcs.
Weight in kg per 100	2,52 kg/ 100pcs.

Technical Datasheet

Electrical installation conduit

IPA 16 G F

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	29.50 mm
Width	50.00 mm
Depth/length	14.00 mm

Packing Dimension

1 piece = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	14.00 mm	Width	50.00 mm	Height	30.00 mm
Gross weight	0,03 kg	Volume	0,000 m³		
Min. quantity	1.00 pcs.	Max. Quantity	1.00 pcs.		
50 pieces = 1		✓ VP2-preferred PU			
Lenght	138.00 mm	Width	128.00 mm	Height	71.00 mm
Gross weight	1,3 kg	Volume	0,001 m³		
Min. Quantity	50.00 pcs.	Max. Quantity	50.00 pcs.		
500 pieces = 1 covering box					
Gross weight	13 kg	Volume	0,014 m³		
Min. Quantity	500.00 pcs.	Max. Quantity	500.00 pcs.		
Lenght	375 mm	Width	282 mm	Height	133.00 mm

Tender Text

Conduit- and cable distance clamp, with M 6 internal thread, for screwing onto screw anchors up to 8 mm thread length, for fastening push-in pipes, threaded pipes and socket pipes-fm to a flat wall/ceiling.
Please note: For safety reasons, we recommend using IPA... pipe and cable spacer clamps for overhead installations.
Used for: cables and electrical conduits according to DIN EN 61386-21
fixing plug-in pipes IESR ...
threaded conduit IEGR ...
sleeve conduit-fm FM-MR ...
Dimensions (approx. dimensions)
Width W x length L : 14 x 50 mm
Internal connection thread : M 6
for cable clamping range-Ø : 15 - 19 mm
for pipe-Ø : 16 mm
Material : steel, hot-dip galvanised acc. to DIN EN ISO 1461
Material crews : stainless steel, material No. 1.4301, AISI 304
Fintech Model No. : IPA 16 G F
EP Material_____ EP Wage_____
Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Technical Datasheet

Electrical installation conduit

IPA 16 G F

the photorealistic images are to be considered as reference images

Origin & International Trade	
Country of origin	DE
Customs tariff number	73269098