



Conduit- and Cable Distance Clamp

with fixing slot

IPA 20 AL

EAN Code: 4046933001222  
Smallest packaging unit: 50 pcs.

the photorealistic images are to be considered as reference images

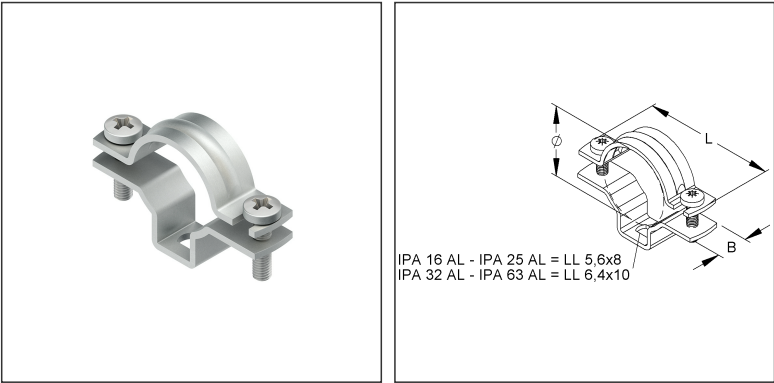

Article Description

Conduit- a. cable distance clamp, f. conduit-Ø M20, clamp. range 19-24, Aluminium

Additional Price Information

|               |         |
|---------------|---------|
| Article group | FT-Rohr |
| quantity unit | pcs.    |

Weight

|                          |                   |
|--------------------------|-------------------|
| Weight per quantity unit | 14 g / pcs.       |
| Weight in kg per 100     | 1,37 kg / 100pcs. |

Physical Article Dimensions

|              |          |
|--------------|----------|
| Height       | 36.00 mm |
| Width        | 51.20 mm |
| Depth/length | 14.00 mm |

# Technical Datasheet

## Electrical installation conduit

IPA 20 AL

the photorealistic images are to be considered as reference images

### Packing Dimension

|                                    |             |                                     |             |        |           |
|------------------------------------|-------------|-------------------------------------|-------------|--------|-----------|
| <b>1 piece = 1 piece</b>           |             | ✓ VP1-smallest packaging unit ( PU) |             |        |           |
| Lenght                             | 14.00 mm    | Width                               | 52.00 mm    | Height | 36.00 mm  |
| Gross weight                       | 0,01 kg     | Volume                              | 0,000 m³    |        |           |
| Min. quantity                      | 1.00 pcs.   | Max. Quantity                       | 1.00 pcs.   |        |           |
| <b>50 pieces = 1</b>               |             | ✓ VP2-preferred PU                  |             |        |           |
| Lenght                             | 138.00 mm   | Width                               | 128.00 mm   | Height | 71.00 mm  |
| Gross weight                       | 0,75 kg     | Volume                              | 0,001 m³    |        |           |
| Min. Quantity                      | 50.00 pcs.  | Max. Quantity                       | 50.00 pcs.  |        |           |
| <b>500 pieces = 1 covering box</b> |             |                                     |             |        |           |
| Gross weight                       | 7,7 kg      | Volume                              | 0,014 m³    |        |           |
| Min. Quantity                      | 500.00 pcs. | Max. Quantity                       | 500.00 pcs. |        |           |
| Lenght                             | 375 mm      | Width                               | 282 mm      | Height | 133.00 mm |

### Tender Text

Conduit- and cable distance clamp, with long fixing hole, for fixing plug-in pipes IEC, threaded pipes IEC and socket pipes fm to a flat wall/ceiling and for mounting on mounting rail NHP... using angled nut with screw NPB 06.  
Please note: for safety reasons, we recommend overhead installation with conduit and cable distance clamps IPA....  
Used for: cables and electrical conduits according to DIN EN 61386-21  
fixing-in pipes IEC IESR ...  
threaded conduit IEC IEGR ...  
sleeve conduit-fm FM-MR ...  
Dimensions (approx. dimensions)  
Width W x length L : 14 x 51 mm  
Fastening hole : 5.6 x 8 mm  
for clamping range-Ø : 19 - 24 mm  
for pipe-Ø : 20 mm  
Material : aluminium  
Material screws : stainless steel, material No. 1.4301, AISI 304  
Fintech Model No. : IPA 20 AL  
EP Material\_\_\_\_\_ EP Wage\_\_\_\_\_  
Unit price/piece

### Safety & Environment

|            |             |
|------------|-------------|
| REACH Date | 25.06.2025  |
| REACH Info | Conformable |
| RoHS Info  | Conformable |

### Origin & International Trade

|                         |          |
|-------------------------|----------|
| Country of origin       | DE       |
| Federal State of Origin | RP       |
| Customs tarif number    | 76169990 |