


Mounting base, in polyamide 6.6, to secure cables and pipes, by cable ties up to 9 mm width. For fixing to boards with countersunk screws or rivets



TYPE 1

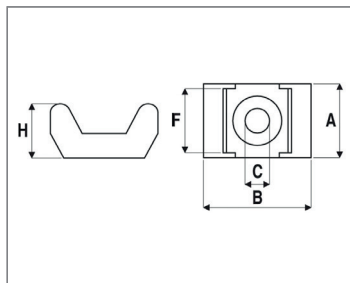

Technical Data

CODE		NOMINAL DIMENSIONS					For cable tie width (mm)
Natural	Black	(mm) A	(mm) B	(mm) C	(mm) F	(mm) H	
5498	5499	10,5	15,7	4,0	5,1	7,0	max 5
5496	5497	14,6	22,5	5,0	9,3	11,0	max 9

Mechanical features and packaging

CODE		Tensile strength (N)	Packaging	
Natural	Black		Bag (pcs)	Box (pcs)
5498	5499	220	100	10.000
5496	5497	700	100	5.000

COLOR

- Natural
- Black

MATERIALS

Materiale: polyamide 6.6 natural or additivated with 1-2% of carbon black for the black color

Good resistance to: bases, aromatic solvents, oils, greases and derivates.

Limited resistance to: acids

Not resistant to: phenols

Material flammability rating:

UL 94-V2

APPLICATION

Installation temperature:

-10°C ÷ +60°C

Working temperature:

-40 °C ÷ +85°C

PRODUCTS CONFORMITY

CE marking: our products comply with the Low Voltage Directive 2014/35/EU and the cable ties are tested in accordance with CEI EN IEC 62275 "Cable management system – Cable ties for electrical installations".

REACH: The materials used to produce the cable ties comply with 1907/2006/CE (REACH).