



## KLINKNAGEL ALU/STAAL 5x12 Brede kop

|               |            |
|---------------|------------|
| Hollow rivet: | Mandrel:   |
| Alu           | Galvanised |
| AlMg 3        | steel      |

52.40.52

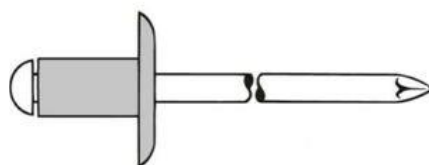

|                                |                   |
|--------------------------------|-------------------|
| Minimale klemcapaciteit:       | 6,00 mm           |
| Maximale klemcapaciteit:       | 8,00 mm           |
| Lengte buisvormige klinknagel: | 12,00 mm          |
| Boordiameter:                  | 5,10 mm           |
| Kopdiameter:                   | 14,00 mm          |
| Naalddiameter:                 | 2,70 mm           |
| Diameter holle klinknagel:     | 5,00 mm           |
| Schuifkracht:                  | 2.000 N           |
| Trekkracht:                    | 2.800 N           |
| Materiaal holle klinknagel:    | Aluminiumlegering |
| Materiaal nagel:               | Verzinkt staal    |
| Kopvorm:                       | Brede kop         |