

Cable Ladder

rung spacing 300 mm, with continuously perforated side profiles, with riveted, upwardly open rungs made of C-profiles with 11 mm slot width

KL 60.503/3 F

As long as there is still in stock




EAN Code: 4013339570225

Smallest packaging unit:3 m

quantity unit:m M



the photorealistic images are to be considered as reference images

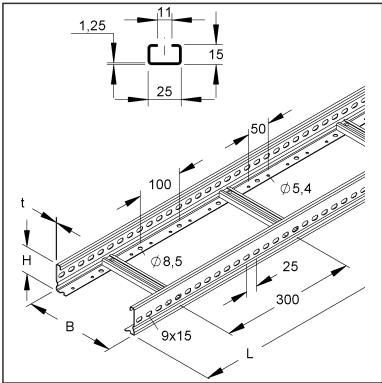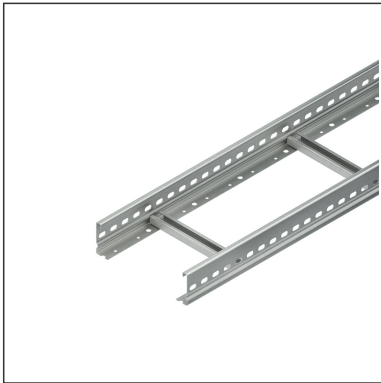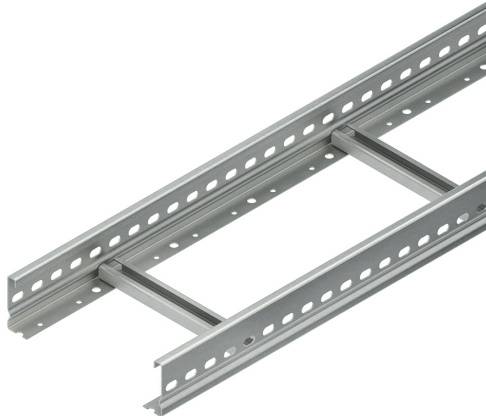

Substitute items

KSL 60.503/3 F

Horiz.vertical cabel ladder, 60x500x3000 mm,perf., SA 300 mm,t=1,5 mm, steel, hot-dip galvanised acc. to DIN EN ISO 1461

Article Description

Cable ladder, 60x500x3000 mm, t=1,5 mm, perforated, steel, hot dip galvanised DIN EN ISO 1461

Additional Price Information

Article group	N13
quantity unit	m

Technical Datasheet

Cable Ladder System

KL 60.503/3 F

the photorealistic images are to be considered as reference images

Substitute items

KSL 60.503/3 F	Horiz.vertical cabel ladder, 60x500x3000 mm,perf., SA 300 mm,t=1,5 mm, steel, hot-dip galvanised acc. to DIN EN ISO 1461
-----------------------	--

Weight

Weight per quantity unit	3,486 kg / m
Weight in kg per 100	348 kg / 100m

Physical Article Dimensions

Height	60.00 mm
Width	500 mm
Depth/length	3000 mm

Packing Dimension

3 meters = 1 piece		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	3000 mm	Width	500 mm	Height	60.00 mm
Gross weight	10 kg	Volume	0,090 m³		
Min. quantity	3.00 m	Max. Quantity	3.00 m		

Tender Text

Cable ladder acc. to DIN EN 61537, with continuously perforated and profiled side rails, with riveted rungs made of C-profiles with 11 mm slot width.
Corresponding U-clamps: BA... and BAK...
Dimensions (approx. dimensions)
Height H x width W : 60 x 500 mm
Material thickness side rail : 1.5 mm
Rung distance : 300 mm
Side rail perforation : 9 x 15 mm
Center distance : 25 mm
Base perforation : Ø 8.5 mm
Center distance : 100 mm
Delivery length L : 3000 mm
Transport length : 3000 mm + W
Usable cross-section : 21550 mm²
Material : Steel, hot-dip galvanised acc. to DIN EN ISO 1461
NIEDAX Model No. : KL 60.503/3 F
EP Material_____ EP Wage_____
Unit price/meter

Safety & Environment

REACH Date	04.02.2026
REACH Info	Conformable
RoHS Info	Conformable

Technical Datasheet

Cable Ladder System

KL 60.503/3 F

the photorealistic images are to be considered as reference images

Substitute items

KSL 60.503/3 F	Horiz.vertical cabel ladder, 60x500x3000 mm,perf., SA 300 mm,t=1,5 mm, steel, hot-dip galvanised acc. to DIN EN ISO 1461
-----------------------	--

Origin & International Trade

Country of origin	DE
Federal State of Origin	RP
Customs tariff number	73089059

Related items

Cover

Model No.	Description
RD 500 F	Cover for cable tray/-ladder, with joint strip, 502x3000 mm, steel, hot dip galvanised DIN EN ISO 1461
RDRS 9 F	Turning bolt with locking nut acc. to DIN EN ISO 10511, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories
RDV 500 F	Cover for cable tray/-ladder, with joint strip, 502x3000 mm, steel, hot dip galvanised DIN EN ISO 1461

Barrier strip

Model No.	Description
KLWC 11 F	Barrier strip fastening clamp, for 11 mm slot width, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories
RW 35 F	Barrier strip, 30x3000 mm, t=0,75 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories

Connector

Model No.	Description
KSV 60 F	Splice plate for cable ladder, height 60 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories