


Coupler

KSV 60/320 F

EAN Code: 4013339059652

Smallest packaging unit: 20 pcs.

the photorealistic images are to be considered as reference images

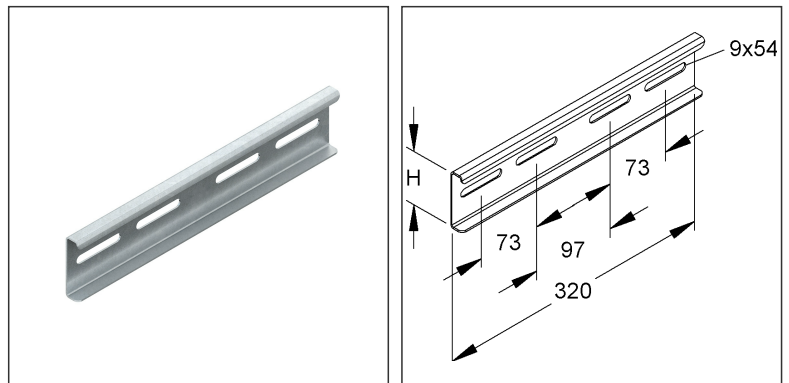

Article Description

Splice plate for cable ladder, 60x320mm, steel, hot dip galvanised DIN EN ISO 1461

Incl. accessories

4 FLM 8X13 F

Additional Price Information

Article group	N13
quantity unit	pcs.

Weight

Weight per quantity unit	502 g / pcs.
Weight in kg per 100	50 kg / 100pcs.

Technical Datasheet

Cable Ladder System

KSV 60/320 F

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	64.00 mm
Width	15.00 mm
Depth/length	320 mm

Packing Dimension

20 pieces = 1 carton		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	350 mm	Width	180.00 mm	Height	110.00 mm
Gross weight	10 kg	Volume	0,007 m³		
Min. quantity	20.00 pcs.	Max. Quantity	20.00 pcs.		

480 pieces = 1					
Lenght	750 mm	Width	750 mm	Height	730 mm
Gross weight	289 kg	Volume	0,411 m³		
Min. Quantity	480.00 pcs.	Max. Quantity	480.00 pcs.		

Tender Text

Splice plate, for creating a form-fitting connection that is aligned lengthwise between horizontal and vertical cable ladder, their fittings as well as vertical cable ladder, including proportionate hot-dip galvanised fastening accessories. The equipotential bonding is carried out by screwing to the horizontal and vertical cable ladder rails, the fitting rails and vertical cable ladder rails. Used for : horizontal and vertical cable ladder KSL... and their fittings, vertical cable ladder STM... with 60 mm edge height

Requirement : 2 pieces per joint

Dimensions (approx. dimensions)

Height H x length L : 60 x 320 mm

Material : steel, hot-dip galvanised acc. to DIN EN ISO 1461

NIEDAX Model No. : KSV 60/320 F

EP Material_____ EP Wage_____

Unit price/piece

Safety & Environment

REACH Date	04.02.2026
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059