


Horizontal Elbow

with continuously perforated and profiled side rails, with cross perforated, riveted, upwards-open rungs made of C-profiles with a 16 mm slot width

★ **KSLE 60.203 E5**

EAN Code: 4013339262465
Smallest packaging unit: 1 pc.

the photorealistic images are to be considered as reference images

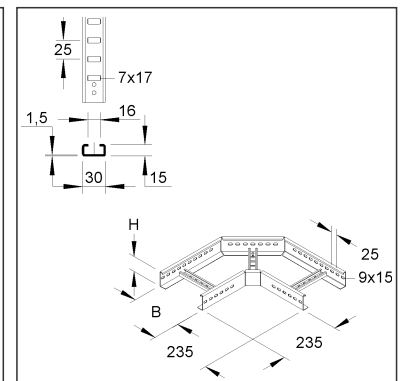

Article Description

Corner piece for KSL, 60x200 mm, with perforated side rails, stainless steel, material code: 1.4571, AISI 316Ti

Additional Price Information

Article group	N13
quantity unit	pcs.

Weight

Weight per quantity unit	1,771 kg/ pcs.
Weight in kg per 100	177 kg / 100pcs.

Technical Datasheet

Cable Ladder System



the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	60.00 mm
Width	435 mm
Depth/length	435 mm

Packing Dimension

1 piece = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	435 mm	Width	435 mm	Height	60.00 mm
Gross weight	1,77 kg	Volume	0,011 m³		
Min. quantity	1.00 pcs.	Max. Quantity	1.00 pcs.		

Tender Text

Elbow, with continuously perforated and profiled side rails, with cross perforated, riveted, upwards-open rungs made of C-profiles with a 16 mm slot width, for creating a horizontal right-angled outlet. Please order splice plates KSV 60... separately.

Corresponding U-clamps: B... and BK...

Used for : cable ladder KSL 60...

Dimensions (approx. dimensions)

Height H x width W : 60 x 200 mm

Outer dimensions : 235 mm + W

Material : stainless steel, material no. 1.4571, AISI 316Ti

NIEDAX Model No. : KSLE 60.203 E5

EP Material_____ EP Wage_____

Unit price/piece

Safety & Environment

REACH Date	04.02.2026
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059