

Horizontal Elbow 90°, large



with continuously perforated and profiled side rails, with cross perforated, riveted, upwards-open rungs made of C-profiles with a 16 mm slot width

★ **KSLBG 60.203 S**

EAN Code: 4013339262083

Smallest packaging unit: 1 pc.

the photorealistic images are to be considered as reference images

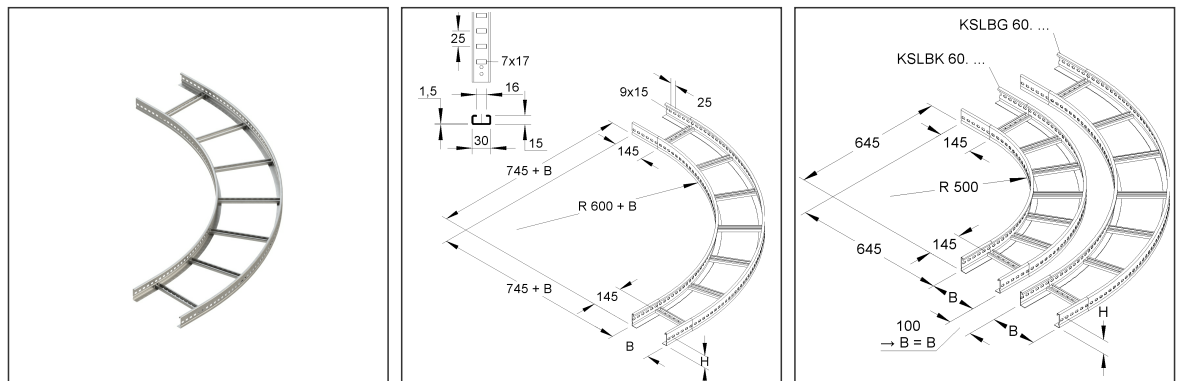

Article Description

Elbow 90°, for KSL, large, 60x200 mm, with perforated side rails, steel, pre-galvanised acc. to DIN EN 10346

Additional Price Information

Article group	N13
quantity unit	pcs.

Weight

Weight per quantity unit	4,735 kg / pcs.
Weight in kg per 100	473 kg / 100pcs.

Technical Datasheet

Cable Ladder System



the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	60.00 mm
Width	1145 mm
Depth/length	1145 mm

Packing Dimension

1 piece = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	1145 mm	Width	1145 mm	Height	60.00 mm
Gross weight	4,74 kg	Volume	0,079 m³		
Min. quantity	1.00 pcs.	Max. Quantity	1.00 pcs.		

Tender Text

Elbow 90°, large, with continuously perforated and profiled side rails, with cross perforated, riveted, upwards-open rungs made of C-profiles with a 16 mm slot width, for creating horizontal 90° elbows. Please order splice plates KSV 60... separately.

Corresponding U-clamps: B... and BK...

Parallel routing possible. The laying distance is 100 mm with identical horizontal and vertical cable ladder widths.

Used for : cable ladder KSL 60...

Dimensions (approx. dimensions)

Height H x width W : 60 x 200 mm

Outer dimensions : 745 mm + W + W

Inner rail radius R : 600 mm + W

Material : steel, pre-galvanised acc. to DIN EN 10346

NIEDAX Model No. : KSLBG 60.203 S

EP Material_____ EP Wage_____

Unit price/piece

Safety & Environment

REACH Date	04.02.2026
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059