


Horizontal Elbow, adjustable

with continuously perforated and profiled side rails, with cross perforated, riveted, upwards-open rungs made of C-profiles with a 16 mm slot width


★ KSLGS 60.403 S

EAN Code: 4013339262793

Smallest packaging unit: 1 pc.



the photorealistic images are to be considered as reference images

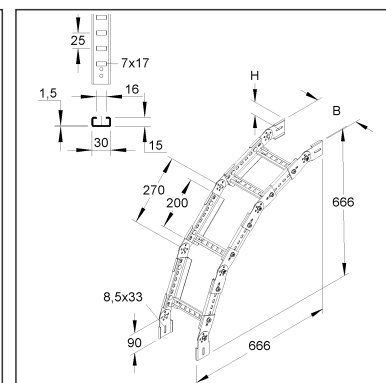

Article Description

Elbow for KSL, adjustable, vertical, 60x400 mm, SA 300 mm, steel, pre-galvanised acc. to DIN EN 10346, incl. accessories

Incl. accessories

16 FLM 8X13 F

Additional Price Information

Article group	N13
quantity unit	pcs.

Weight

Weight per quantity unit	4,586 kg / pcs.
Weight in kg per 100	459 kg / 100pcs.

Technical Datasheet

Cable Ladder System



the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	400 mm
Width	666 mm
Depth/length	666 mm

Packing Dimension

1 piece = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	666 mm	Width	666 mm	Height	400 mm
Gross weight	4,59 kg	Volume	0,177 m³		
Min. quantity	1.00 pcs.	Max. Quantity	1.00 pcs.		

Tender Text

Elbow, adjustable, vertical, with continuously perforated and profiled side rails, with cross perforated, riveted, upwards-open rungs made of C-profiles with a 16 mm slot width.

Complete assembly kit for ascending and descending cable and ladder installation, including proportionate KGV 60... joint connectors and proportionate hot-dip galvanised fastening accessories.

Corresponding U-clamps: B... and BK...

Used for : cable ladder KSL 60...

Delivery : unassembled

Dimensions (approx. dimensions)

Height H x width W : 60 x 400 mm

Material : steel, pre-galvanised acc. to DIN EN 10346

NIEDAX Model No. : KSLGS 60.403 S

EP Material_____ EP Wage_____

Unit price/piece

Safety & Environment

REACH Date	04.02.2026
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059