FILTER HARDWARE - □ 0: NONE

SCALE

NTS

SIZE Α

600-00028-0004

## **SPECIFICATIONS**

- 1. THE HEIGHT AND WIDTH TOLERANCE IS +0/-1/8"; SQUARE WITHIN 1/8"
- 2. THE DEPTH TOLERANCE IS +1/16" / -0
- 3. THE FILTER RESISTANCE IS 1.0" W.G. MAXIMUM AT THE RATED FLOW
- 4. THE MAXIMUM TEMPERATURE EXPOSURE IS 250°F (NON F.R. PLYWOOD 200°F, URETHANE GEL 150°F)
- 5. THE MAXIMUM R.H. IS 100%
- 6. CLASSIFIED BY UNDERWRITERS LABORTORIES TO FLAMMABILITY ONLY UL 900.
- 7. IF SCAN TESTED, THE FILTER SHALL BE TESTED AT 90 FPM ±10% WITH AN APPROVED AEROSOL FOR LEAKS.

PACK STYLE - □ F: 8" PUREFORM ☐ C: ALUMINUM SEPARATORS

FRAME MATERIAL - 🗆 04: 3/4" F.R. PLYWOOD

☐ 07: 3/4" F.R. PARTICLEBOARD ☐ 11: 3/4" NON F.R. PARTICLEBOARD

☐ T: FILTER EXTRACTION CLIPS

FILTER MEDIUM - □ 007: 99.97% AT 0.3 μm WATER RESISTANT GLASS

☐ 01: 3/4" NON F.R. PLYWOOD

FRAME STYLE - 05: FLUID SEAL CHANNEL

SIZE DESIGNATORS & RATED FLOW @ 1.0" W.G.						
SIZE CODE	HEIGHT	WIDTH	DEPTH	RATED FLOW (CFM)		
CC-F	12"	12"	11 1/2"	205		
YU-F	23 3/8"	11 3/8"	11 1/2"	425		
GC-F	24"	12"	11 1/2"	455		
GE-F	24"	18"	11 1/2"	725		
YY-F	23 3/8"	23 3/8"	11 1/2"	945		
GG-F	24"	24"	11 1/2"	1000		
GN-F	24"	30"	11 1/2"	1275		

PACK SEALANT - TEST METHOD	□ IU: SOLID URETHANE / DOP TEST (99.97%) □ SU: SOLID URETHANE / SCAN TEST (99.99%)
	□ 00: NONE

**□ 51: SILICONE GEL UPSTREAM** 

☐ 52: SILICONE GEL DOWNSTREAM **GASKET MATERIAL LOCATION -**

☐ 61: URETHANE GEL UPSTREAM

☐ 62: URETHANE GEL DOWNSTREAM.

□ 00: NONE

**SEE CHART** 

☐ 11: GALVANIZED UPSTREAM

☐ 12: GALVANIZED DOWNSTREAM FACEGUARD MATERIAL LOCATION -


☐ 13: GALVANIZED BOTH SIDES


☐ 21: STAINLESS STL. UPSTREAM ☐ 22: STAINLESS STL. DOWNSTREAM

☐ 23: STAINLESS STL. BOTH SIDES

**GG-F EXAMPLE** SIZE CODE -

SIGNAT COMME QUOTE

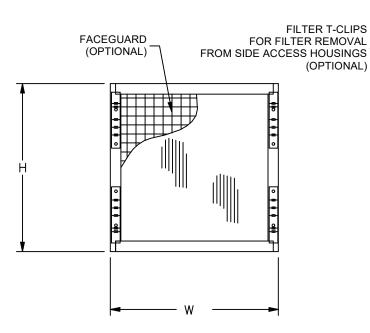

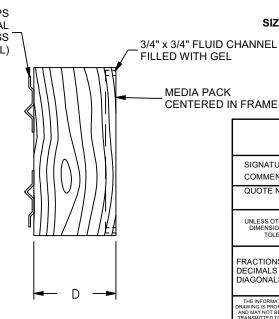

_					
	CUSTOMER APPROVAL  BE SIGNED IN ORDER TO PROCEED WITH PRODUCTION.  APPROVED AS NOTED [ ] NOT APPROVED - RESUBMIT				
JRE:	DATE:				
NTS:					
NO.:					
THERWISE SPECIFIED ONS ARE IN INCHES	AAE Clandon				

UNLESS O TOLERANCES ARE: TITLE: ALPHA CELL. WOOD FRAME, FLUID SEAL FRACTIONS X/X ±1/8 DECIMALS X.XX ±0.13

DIAGONALS	±1/8				
DIAGONALS		DRAWN BY	CHECKED BY	APPROVED BY	SHE
		jholland	S.TATE	M.RENN	] "
THE INFORMATION COI	RY TO AAF FLANDERS , REPRODUCED NOR R PARTIES WITHOUT		9/8/2021	9/21/2021	1 C
TRANSMITTED TO OTHER F EXPRESSED WRITTEN CO		DRAWING NU	IMBER	600.0	· · · · · ·