


REVISIONS

--	--	--	--

FILTER	PLEATS PER LINEAR FOOT	RATED INITIAL RESISTANCE (W.G.)		RECOMMENDED FINAL RESISTANCE (W.G.)	ASHRAE 52.2 MERV	CONTINUOUS OPERATING TEMPERATURE LIMITS	
		300 FPM	500 FPM			180° F	82° C
1" PREpleat M10 SC	13	0.22"	0.30"	1.0"	10	180° F	82° C


MODEL NUMBER	NOMINAL A x B (INCHES)	ACTUAL A x B (INCHES)	RATED AIRFLOW		PLEATS PER FILTER	GROSS MEDIA AREA (sq. ft.)
			300 FPM	500 FPM		
80055.011020	10 x 20	9 1/2 x 19 1/2	400	700	11	2.3
80055.011212	12 x 12	11 3/8 x 11 3/8	300	500	13	1.6
80055.011220	12 x 20	11 1/2 x 19 1/2	500	850	13	2.7
80055.011224	12 x 24	11 1/2 x 23 1/2	600	1000	13	3.2
80055.011420	14 x 20	13 1/2 x 19 1/2	600	1000	16	3.3
80055.011425	14 x 25	13 1/2 x 24 1/2	750	1200	16	4.1
80055.011520	15 x 20	14 1/2 x 19 1/2	650	1050	17	3.5
80055.011616	16 x 16	15 3/4 x 15 3/4	550	900	18	3.2
80055.011620	16 x 20	15 1/2 x 19 1/2	650	1100	18	3.7
80055.011625	16 x 25	15 1/2 x 24 1/2	850	1400	18	4.7
80055.011824	18 x 24	17 1/2 x 23 1/2	900	1500	20	5.0
80055.011825	18 x 25	17 1/2 x 24 1/2	950	1550	20	5.2
80055.012020	20 x 20	19 1/2 x 19 1/2	850	1400	22	4.6
80055.012024	20 x 24	19 1/2 x 23 1/2	1000	1650	22	5.5
80055.012025	20 x 25	19 1/2 x 24 1/2	1050	1750	22	5.7
80055.012424	24 x 24	23 3/8 x 23 3/8	1200	2000	26	6.5
80055.012525	25 x 25	24 1/2 x 24 1/2	1300	2150	27	7.0

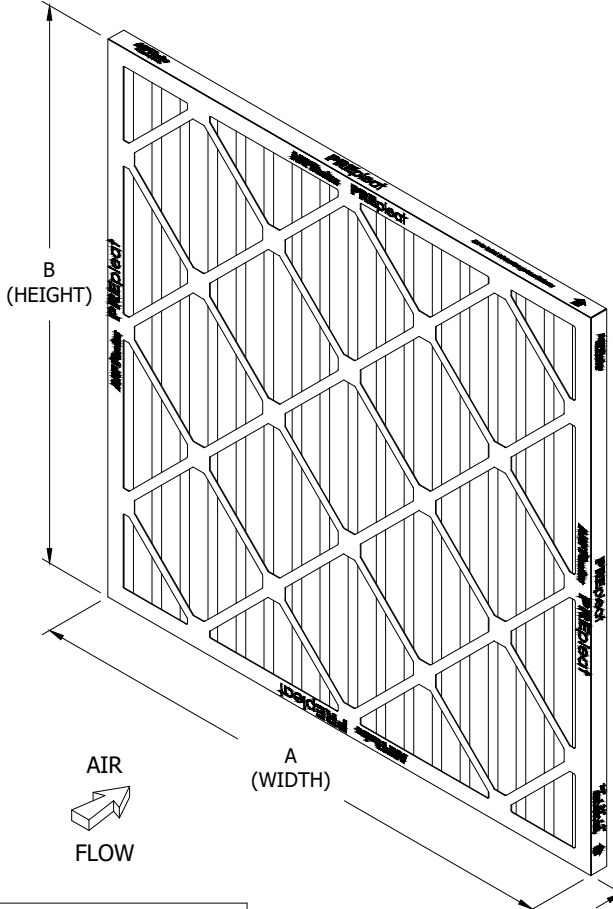

Specifications:

- 1 MERV 10 per ASHRAE Standard 52.2
- 2 Frame - High wet strength 24 point beverage board.
- 3 Media - 100% synthetic.
- 4 Support Grid - Single dimension expanded metal bonded 100% to media.
- 5 Adhesive - White glue utilized to attach straps to media and media to the frame
- 6 UL Certified

FORM I297 REV. 5/00

DRAWN GAC	DATE 12APR2024	CHECKED GC	DATE 18APR2024	APPR. ---	DATE ----	SUPERSEDES
 <p>P.O. Box 35690 Louisville, KY. 40232-5690 www.aafintl.com</p>						DRAWING NO.
						3189326
						SHEET 1 OF 1

FILTER ASSEMBLY, 1" PREpleat M10 SC (SALES)