


REVISIONS

FILTER	PLEATS PER LINEAR FOOT	RATED INITIAL RESISTANCE (W.G.)			RECOMMENDED FINAL RESISTANCE (W.G.)	ASHRAE 52.2 MERV	CONTINUOUS OPERATING TEMPERATURE LIMITS	
		300 FPM	500 FPM	625 FPM				
2" PREpleat M10 SC	10	0.18"	0.28"	0.39"	1.0"	10	180° F	82° C


MODEL NUMBER	NOMINAL A x B (INCHES)	ACTUAL A x B (INCHES)	RATED AIRFLOW			PLEATS PER FILTER	GROSS MEDIA AREA (sq. ft.)
			300 FPM	500 FPM	625 FPM		
80055.021020	10 x 20	9 1/2 x 19 1/2	400	700	900	8	3.9
80055.021212	12 x 12	11 3/8 x 11 3/8	300	500	625	10	2.9
80055.021220	12 x 20	11 1/2 x 19 1/2	500	850	1050	10	4.9
80055.021224	12 x 24	11 1/2 x 23 1/2	600	1000	1250	10	5.8
80055.021420	14 x 20	13 1/2 x 19 1/2	600	1000	1150	12	5.8
80055.021425	14 x 25	13 1/2 x 24 1/2	750	1200	1500	12	7.3
80055.021520	15 x 20	14 1/2 x 19 1/2	650	1050	1300	13	6.3
80055.021616	16 x 16	15 3/4 x 15 3/4	550	900	1100	14	5.4
80055.021620	16 x 20	15 1/2 x 19 1/2	650	1100	1400	14	6.8
80055.021625	16 x 25	15 1/2 x 24 1/2	850	1400	1750	14	8.5
80055.021824	18 x 24	17 1/2 x 23 1/2	900	1500	1900	15	8.8
80055.021825	18 x 25	17 1/2 x 24 1/2	950	1550	1950	15	9.1
80055.022020	20 x 20	19 1/2 x 19 1/2	850	1400	1750	17	8.3
80055.022024	20 x 24	19 1/2 x 23 1/2	1000	1650	2100	17	9.9
80055.022025	20 x 25	19 1/2 x 24 1/2	1050	1750	2150	17	10.3
80055.022424	24 x 24	23 3/8 x 23 3/8	1200	2000	2500	20	11.7
80055.022525	25 x 25	24 1/2 x 24 1/2	1300	2150	2400	21	12.8

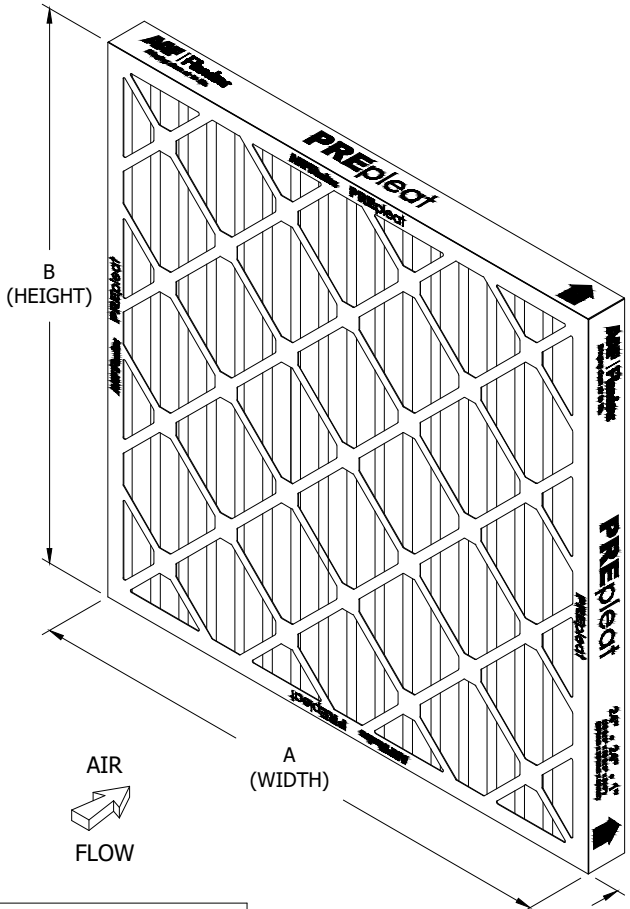

Specifications:

- 1 MERV 10 per ASHRAE Standard 52.2
- 2 Frame - High wet strength 24 point beverage board.
- 3 Media - 100% synthetic.
- 4 Support Grid - Single dimension expanded metal bonded 100% to media.
- 5 Adhesive - White glue utilized to attach straps to media and media to the frame
- 6 UL Certified

FORM I297 REV. 5/00

DRAWN GAC	DATE 12APR2024	CHECKED GC	DATE 18APR2024	APPR. ---	DATE ----	SUPERSEDES
 <p>P.O. Box 35690 Louisville, KY. 40232-5690 www.aafintl.com</p>						DRAWING NO.
						3189327
						SHEET 1 OF 1

FILTER ASSEMBLY, 2" PREpleat M10 SC (SALES)