


REVISIONS

PART NUMBER	NOMINAL SIZE	ACTUAL SIZE (H x W x D)	MEDIA AREA (Sq. Ft.)	RATED AIRFLOW CAPACITY (SCFM)		GASKET LOCATION	RATING
				LOW - 0.15" WG	HIGH - 0.20" WG		
3188852-001	12 x 24 x 17	11 3/8 x 23 3/8 x 16 1/2	126	492	604	ALS	MERV 16
3188852-002	20 x 24 x 17	19 3/8 x 23 3/8 x 16 1/2	218	820	1007		
3188852-003	24 x 24 x 17	23 3/8 x 23 3/8 x 16 1/2	266	984	1208		
3188852-007	12 x 24 x 17	11 3/8 x 23 3/8 x 16 1/2	126	492	604	X	
3188852-008	20 x 24 x 17	19 3/8 x 23 3/8 x 16 1/2	218	820	1007		
3188852-009	24 x 24 x 17	23 3/8 x 23 3/8 x 16 1/2	266	984	1208		

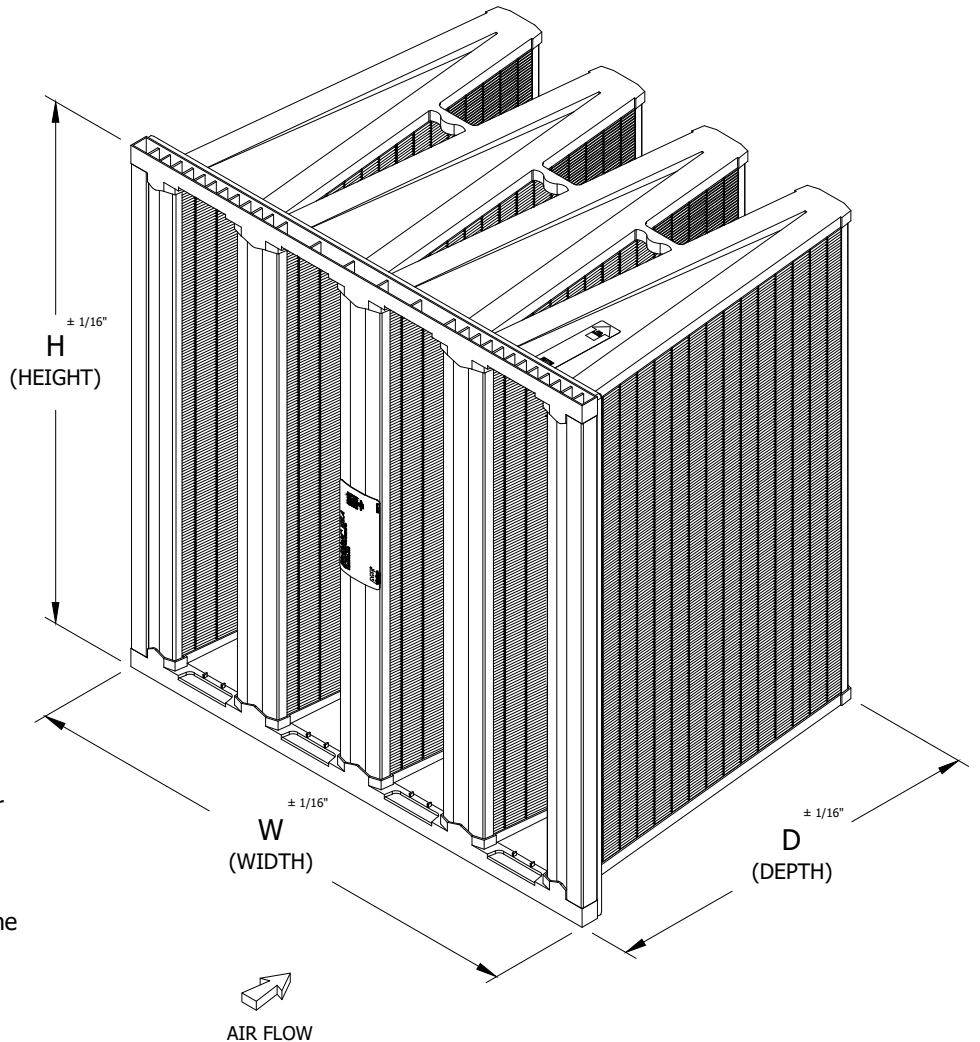

GENERAL NOTES:

- 1 Materials of Construction:
 - A. Media:
Single density, Microglass Paper
 - B. Separators:
Adhesive bead separators
 - C. Frame:
Recycled high impact polystyrene
 - D. Sealant:
Polyurethane


- 2 ASHRAE ratings/resistance at 500 FPM

 MERV 16 0.38" W.G.

 Testing in accordance with ASHRAE Standard 52.2
 Maximum recommended final resistance is 2" W.G.

- 3 Maximum operating temperature 176° F (80° C)
- 4 Recommended Final Resistance 1.5" W.G.
- 5 Fully Incinerable

FORM I297 REV. 5/00

DRAWN GAC	DATE 13MAY2026	CHECKED GC	DATE 13MAY2026	APPR. KM	DATE 15MAY2026	DRAWING NO. 3192790	REV --
 P.O. Box 35690 Louisville, KY. 40232-5690 www.aafintl.com						FILTER ASSEMBLY, BioShield VXLA (SH STD AF) (17" DEEP) (SUBMITTAL)	