
PADS - ROUND: STANDARD 2 & 3 HOLE MOUNTING (1/4" Thick)



Ref	Diameter	P/N
(2)	2-1/2"	PR25D3H14
(1)	2-1/2"	PR25D3HS
(4)	2-3/4"	PR275D3H90
(5)	2-3/4"	PR275D2H180
(1)	3"	PR3D3HS
	3"	PR3D3H
(3)	3"	PR3D3H90
	3-1/2"	PR35D3H
(3)	3-1/2"	PR35D3H90
	4"	PR4D3H
	4-1/2"	PR45D3H
	5"	PR5D3H

- (3) & (4)
- 6 6
- (1) This pad is drilled and countersunk for #10 hardware, holes are equally spaced.
- (2) This pad has 3 holes equally spaced, drilled and countersunk for #14 hardware.
- (3) This pad has 3 holes 90° apart and countersunk for #14 hardware providing easier fastening after welding.
- (4) This pad is drilled and countersunk for #10 hardware and the holes are 90° apart. Great for Bow Rails and Grab Rails & Ladders.
- (5) This pad has 2 holes equally spaced 180° apart and is drilled & countersunk for #10 hardware.

Refer to Section C for Mill Finish components!





(5)

PADS - ROUND: CENTER HOLE ONLY (1/4" Thick)


Ref	Diameter	P/N
(1A)	2-1/2"	PR25DS
(1A)	3"	PR3DS
(1A)	4"	PR4DS
(1A)	5"	PR5DS
(1A)	6"	PR6DS

(1B) All holes located on the outer edge of these round pads are not countersunk. The holes are sized for #14 HDW clearance, (1/4" thick).










 Other pads sizes and styles without countersunk holes are easily available.

Refer to Section C for Mill Finish components!

Please check with your local T&C Metals Branch for updates, as specifications, materials availability, prices and terms of purchase may change without notice.



PADS - ROUND: 4-HOLE MOUNTING (1/4" Thick & 3/8" Thick)

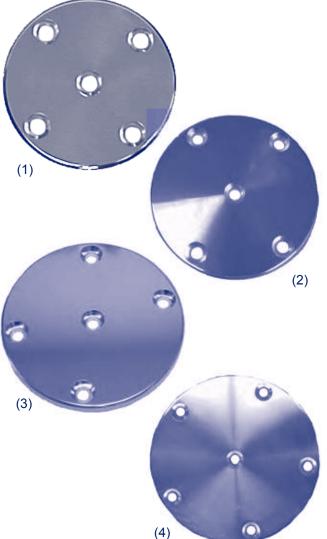

Ref	Diameter	P/N
(1)	3-1/2"	PR35D4H
(1)	4"	PR4D4H
(2)	4"	PR4D4HS
(1)	4-1/2"	PR45D4H
(1)	5"	PR5D4H
(2)	5"	PR5D4HS
(3)	5"	PR5D4H38516
(1)	6"	PR6D4H
(4)	5"	PR5D5H
(4)	6"	PR6D5H
(4)	6"	PR6D5H38

- (2) Special offset hole pattern for where you need a four hole pad but have very little room to weld.
- (3) Drill & counter sunk for 5/16" HDW and is 3/8" thick.
- Special offset hole pattern pads available also.



PADS - ROUND: 3, 4, 5 HOLE WITH OPENING (1/4" & 3/8" Thick)

*The hole in the middle is machined to the customer's requirements

3 HOLE

# Holes	Diameter	P/N
3	3-1/2"	PRO35D3H
3	4"	PRO4D3H
3	4-1/2"	PRO45D3H
3	5"	PRO5D3H

4 & 5 HOLE


# Holes	Diameter	P/N	
4	3-1/2"	PRO4D4H	
4	4"	PRO45D4H	
4	5"	PRO5D4H	
5	6"	PRO6D5HS38	(1)



(1: this pad is 3/8" thick)

E-TEC BRAND PADS - ROUND: HIGHLY POLISHED

# Holes	Diameter	P/N
3	3"	PRP3D3H
3	3-1/2"	PRP35D3H
3	4"	PRP4D3H
4	4"	PRP4D4H
3	4-1/2"	PRP45D3H
4	4-1/2"	PRP45D4H
3	5"	PRP5D3H
4	5"	PRP5D4H
4	5-1/2"	PRP55D4H





OUTRIGGER PADS: FOR HARDTOPS & CANVAS TOP FRAMES



Size	P/N	
6" x 8-3/4" x 3/8"	TT007P	

- This pad is designed for outrigger mounting.
- The holes are pre-drilled to accept most bolt-on style outriggers.
- · Also available in mill finish

2-PIECE COVER PLATES: SCREW TOGETHER FOR HARD TOPS Simple Design - Simple to Use!



P/N	
TT142PL	

- Polished and brite dipped anodized.
- · Lite brush finish also available
- Also available in mill finish.

Refer to Section E for details.



PADS - ROUND: CIRCULAR BRUSHED (1/4" Thick)

All Pads are Drilled & Countersunk for 1/4" Hardware (except as noted)

Ref	# Holes	Diameter	P/N
	3	2-1/2"	PRB25D3H
(1)	3	2-1/2"	PRB25D3HS
(2)	1	2-1/2"	PRB25DS
	3	3"	PRB3D3H
(1)	3	3"	PRB3D3HS
	3	3-1/2"	PRB35D3H
	4	3-1/2"	PRB35D4H
	3	4"	PRB4D3H
	4	4"	PRB4D4H
(3)	3	4"	PROB4D3H
(3)	4	4"	PROB4D4H
	3	4-1/2"	PRB45D3H
	4	4-1/2"	PRB45D4H
(3)	3	4-1/2"	PROB45D3H
(3)	4	4-1/2"	PROB45D4H
	3	5"	PRB5D3H
	4	5"	PRB5D4H
(3)	3	5"	PROB5D3H
	5	6"	PRB6D5H

- (1) Pad is drilled & countersunk for #10 hardware.
- (2) Center hole only. Other sizes available.
- (3) Hole is machined to customer's specs.

ANY size pad - ANY size hole available!





Image shown above has a polished finish, not brushed





PADS - RECTANGULAR: 2 & 4 HOLE MOUNTING, 1/4" Thick



(1) Brushed (above & below)






(2) Polished (above)

Finish	Size	P/N	
Polished	1-1/2" x 3-1/2"	PRTP15X35	
Brushed	2" x 4"	PRTB2X4	(1)
Polished	2" x 4"	PRTP2X4	
Brushed	2" x 4"	PRT2X4S	(1)
Brushed	2-1/2" x 4"	PRT25X4	
Polished	2-1/2 x 4"	PRTP25X4	
Brushed	2-1/2" x 5"	PRT25X5	
Brushed	3" x 4"	PRTB3X4	
Polished	3" x 4"	PRTP3X4	(2)
Brushed	3-3/4" x 5-1/2"	PRT375X55]
Polished	3-3/4" x 5-1/2"	PRTP375X55	
Brushed	4" x 6"	PRT4X6B	

Pads shown are drilled & countersunk for #10 hardware. Special sizes and hole locations are also available.



PADS - RECTANGULAR SHAPED: HARD TOP STYLE, 3/8" Thick

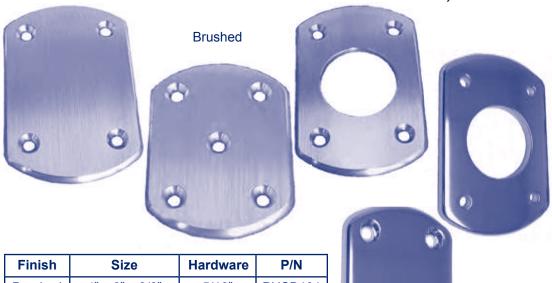

Finish	Size	Hardware	P/N
Brushed	4" x 6" x 3/8"	5/16"	PHSB101
Brushed	4" x 6" x 1/4"	5/16"	PHSB103
Brushed	4" x 6" x 1/4"	5/16"	PHSB104
Brushed	3" x 4" x 1/4"	1/4"	PHSB105
Brushed	3" x 4-3/8" x 1/4"	1/4"	PHSB106
Polished	4" x 6" x 3/8"	5/16"	PHSP201
Polished	4" x 6" x 3/8"	5/16"	PHSP202
Polished	4" x 6" x 1/4"	5/16"	PHSP203
Polished	4" x 6" x 1/4"	5/16"	PHSP204
Polished	3" x 4" x 1/4"	1/4"	PHSP205
Polished	3" x 4-3/8" x 1/4"	1/4"	PHSP206



Polished

- Lite Brushed or Polished.
- Pad is used for Outrigger (2.38 I.D.) and is countersunk for #10 hardware.

Suggested Other Usages: T-Tops, Leaning Posts, Poling Platforms & Towers.



PADS - BOW RAIL: "SHAPED" (1/4" Thick)



Right Hand - Port (Mirror Polished)



Left Hand - Starboard (Mirror Polished)

Description	P/N
Lite Brushed	PRT2X35LH
Lite Brushed	PRT2X35RH
Mirror Polished	PRTP2X35LH
Mirror Polished	PRTP2X35RH

 Pads are machined precisely and have a full radius around the entire pad.

PADS: ANTENNA RATCHET MOUNTING (1/4" Thick)



Description	Size	P/N
Antenna Pad	4" x 4" x 1/4"	ANT4X4
Antenna Pad	2" x 3" x 1/4"	ANT2X3

- · Used for mounting antennas.
- Can also be used to mount all different types of lights.
- Pad is polished to a mirror finish and brite dipped anodized.
- No more unanodized edges when you use this pad!



MALE PIN TO PAD COMBINATION WITH FEMALE PIN TO PIPE

Pin	Pad	P/N
1"	3.5" 4-HOLE	MPP1354
1"	4" 4-HOLE	MPP144
1-1/4"	4" 4-HOLE	MPP12544
1-1/2"	4" 4-HOLE	MPP1544
1-1/2"	4.5", 4" 4-HOLE	MPP15454
1-1/4"	3" x 4" 4-HOLE	MPPR1253X4
1-1/2"	3" x 4" 4-HOLE	MPPR153X4





FEMALE PIN TO PAD COMBINATION WITH MALE PIN TO PIPE

Pin	Pad	P/N
1"	3.5" 4-HOLE	FPP1354
1"	4" 4-HOLE	FPP144
1-1/4"	4" 4-HOLE	FPP12544
1-1/2 "	4" 4-HOLE	FPP1544
1-1/2"	4.5" 4-HOLE	FPP15454

 Most common part sizes are listed above, other sizes are available.



Technetals
Wholesale Metal Products

BIG PADS FOR BIG PIPE "COUNTER SUNK HOLES"

- Now available, pads with thickness ranging from 1/4" 1/2" thick.
- The sizes range from 4" x 6" to 8" x 12".
- The round pads range from 6" 12".
- All holes are drilled and countersunk for 1/4" 1/2" nominal hardware.



To order these standard type pads, please provide **T&C Metals** with a drawing or pattern identifying the size of the pad, number of holes and the location of the holes.

T&C Metals stocks the standard shapes and sizes for quick delivery.



BIG PADS FOR BIG PIPE "NON-COUNTER SUNK HOLES"

- Now available, pads with thickness ranging from 1/4" to 1/2" thick.
- The sizes range from 4" x 6" to 8" x12".
- The round pads range from 6" 12" diameter.



To order these standard type pads, please provide **T& C Metals** with a drawing or pattern identifying the size of the pad, number of holes and the location of the holes.

T&C Metals stocks the standard shapes and sizes for quick delivery.



PADS - TEARDROP: POLISHED OR LITE BRUSHED (1/4" Thick Radius Edge)

Typical Usage: For Hand, Grab and Bow Rails.



Finish	Size	P/N
Polished	2" x 3"	PTDP2X3
Brushed	2" x 3"	PTDB2X3

PADS - DIAMOND: POLISHED OR LITE BRUSHED (1/4" Thick Radius Edge)

Typical Usage: For Hand, Grab, Bow, Stern Rails & Ladders Ends.



Description	Size	P/N
Polished	2" x 3-1/2"	PDMP2X35
Brushed	2" x 3-1/2"	PDMB2X35
Brushed	2" x 4-1/2"	PDMB2X425

Need a different size Diamond Pad, call us!



PADS - OVAL: POLISHED OR LITE BRUSHED (1/4" Thick Radius Edge)

Finish	Size	P/N
Polished	2" x 3-1/2"	POVP2X35
Brushed	2" x 3-1/2"	POVB2X35
Polished	2-1/2" x 4"	POVP25X4
Brushed	2-1/2" x 4"	POVB25X4

Typical Usage: For Hand, Bow, Stern Rails & Ladders Ends.

Need a different size Oval Pad, call us! (No Minimums!)



PADS - HEART: POLISHED OR LITE BRUSHED (1/4" Thick Radius Edge)

Finish	Size	P/N
Polished	3" x 4"	PHTP3X4
Brushed	3" x 4"	PHTB3X4

 This style pad can be custom machined to any size you need.

Typical Usage: For Hand and Bow Rails & Ladder Bases.





PADS: WITH EAR WELDMENT ONLY

(Designed for Pin to Pivot 180 Degrees)

Size	Pad Size	P/N
3/4"	3" Diameter 3 Hole	PEW75
1"	3-1/2" Diameter 4 Hole	PEW1
1-1/4"	4" Diameter 4 Hole	PEW2
1-1/2"	4 Diameter 4 Hole	PEW2

Size	Washers	P/N
3/4"	Yes	PEWA75W
1"	No	PEWA1
1"	Yes	PEWA1W
1-1/4"	No	PEWA125
1-1/4"	Yes	PEWA125W
1-1/2"	No	PEWA150
1-1/2"	Yes	PEWA150W







EAR: MOUNTING

Size	Ref	P/N
3/4"	(1)	EM75
1"	(2)	EM1
1-1/4"	(3)	EM2
1-1/2"	(3)	EM2

When mounting, ear is used with T&C's standard female pin. The pin can pivot approximately 180° from side to side.

- (1) Ear size 3/4", 2"W x 1-1/2"H x 1/4" Thick; 1/4" hole.
- (2) Ear size 1", 2-1/4"W x 1-3/4"H x 3/8" Thick; 5/16" hole.
- (3) Ear Size 1-1/4", 1-1/2", 2-1/2"W x 2"H x 1/2" Thick; 3/8" hole.



Please check with your local T&C Metals Branch for updates, as specifications, materials availability, prices and terms of purchase may change without notice.

