

M9134E-DS OPERATING INSTRUCTIONS

ACSI M1520M-9134-DS

Mortise lock with motorized locking/unlocking and deadbolt security.

DS – DEADBOLT SECURE

Extension of the deadbolt will disable the electrical control of a fail secure lockset locking the OUTSIDE trim. Retracting the deadbolt will enable the electrical control. Free egress at all times.

ELECTRICAL SPECIFICATIONS:

VOLTAGE: 12-24V AC/DC (11V – 30V)

CURRENT: 250mA MAX Inrush, 10mA MAX Holding


Non-polarized Leads

Distance 12V/24V	Wire Gauge
125'/250'	22
200'/400'	20
300'/600'	18
500'/1000'	16
750'/1500'	14
1250'/2500'	12

Lock is furnished as FAIL SECURE and can be easily changed to FAIL SAFE via the switch on the front.

Cycle power once after switching from one function to the other

Switch accessible on
back of lock

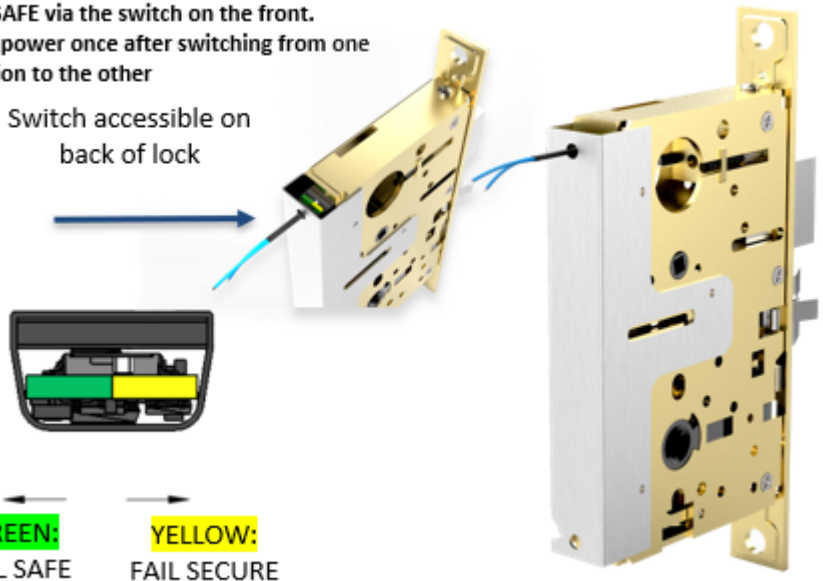

GREEN: FAIL SAFE
 YELLOW: FAIL SECURE