CYLINDER GUIDELINES		
Cylinder Length	Collar Size	
	Inswing	Outswing
¾”	N/A	⅜”
1”		½”
1-⅛”		⅝”
1-¼”		¾”
1-⅜”	⅛”	⅞”
1-½”	⅜”	1”

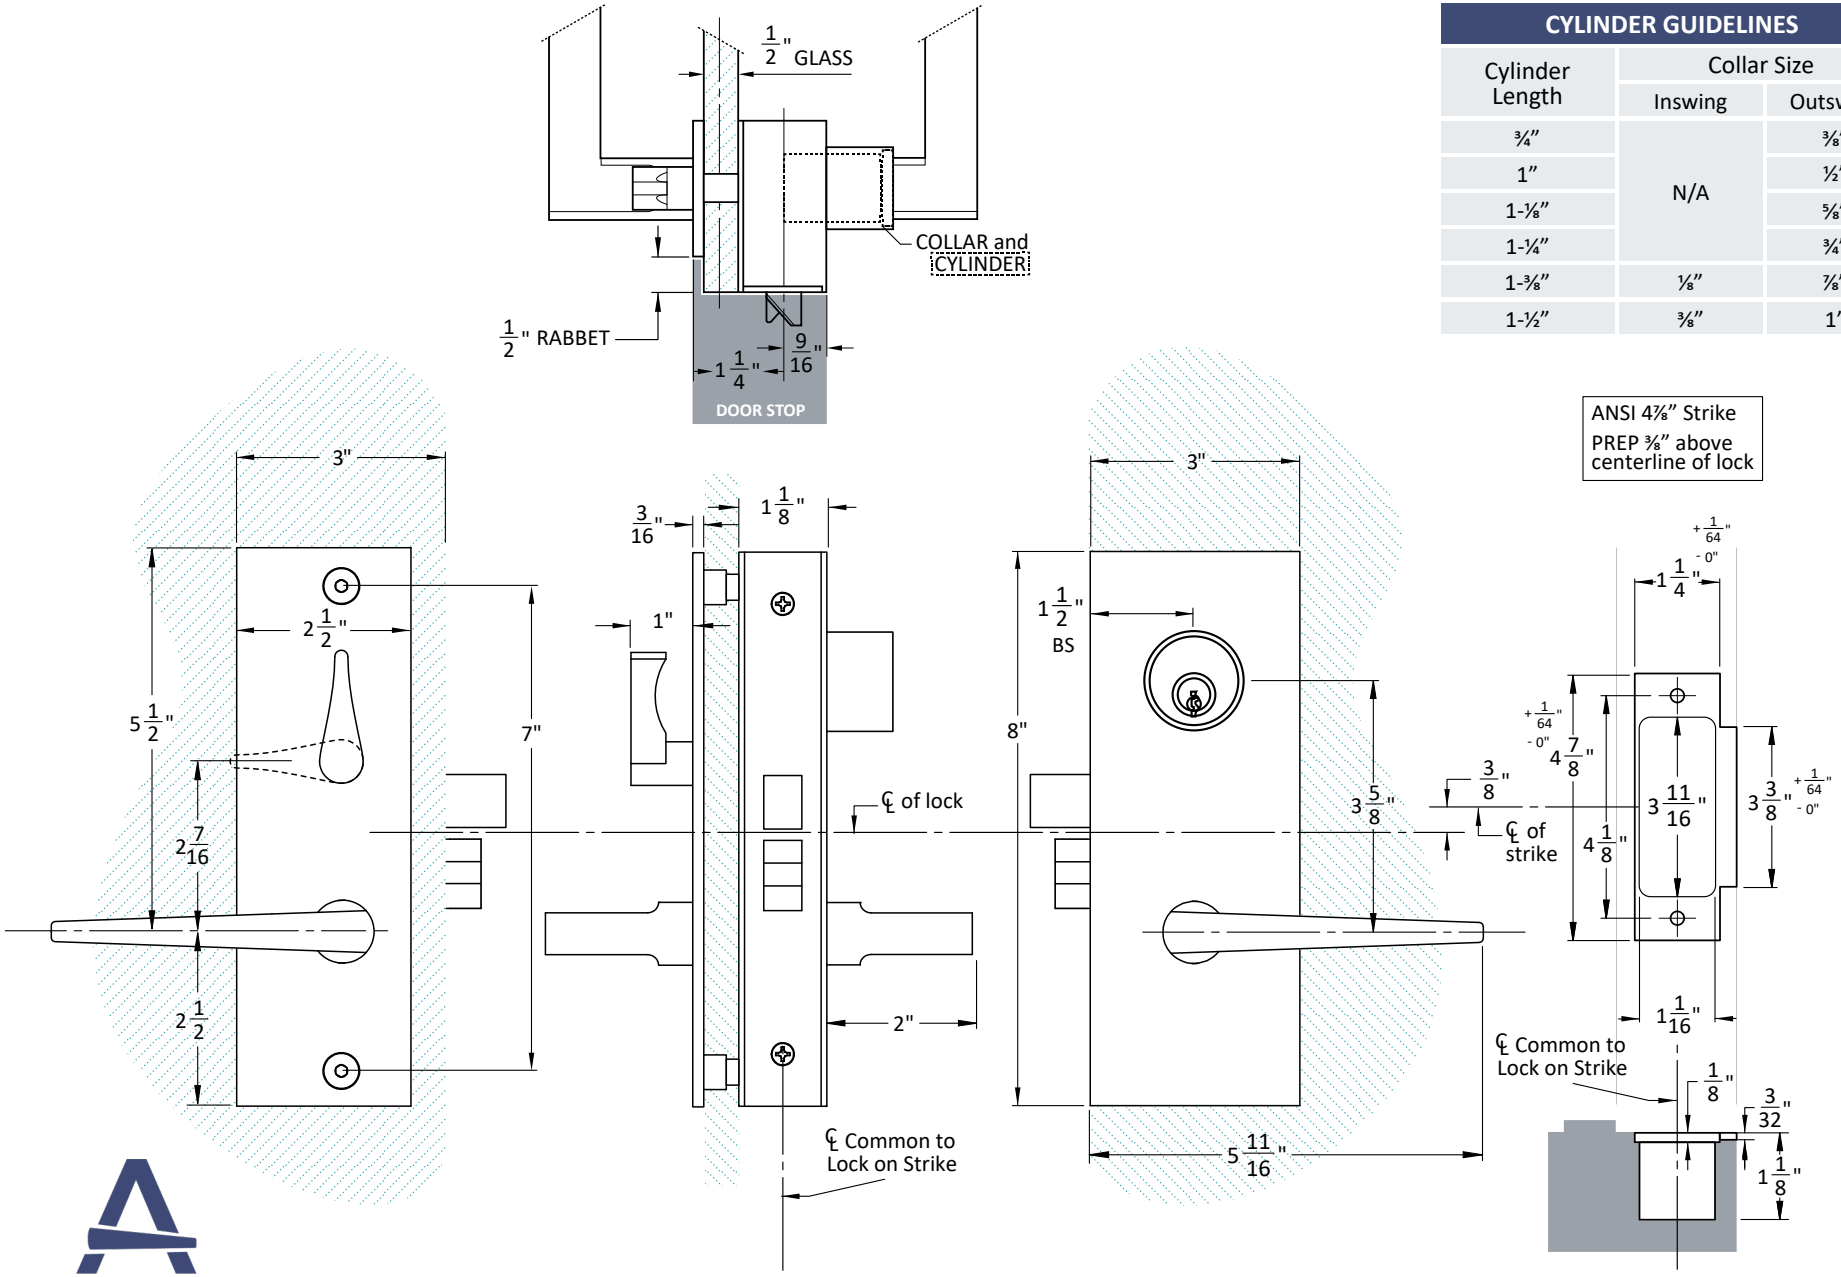

RHR Glass Patch with 18L Levers.

ACCURATE
LOCK & HARDWARE
AMERICAN CRAFTED SINCE 1972

GR8724 Glass Patch Entrance Set

Spec.GR8724-RHR.LHR