


CYLINDER GUIDELINES		
Cylinder Length	Collar Size	
	Inswing	Outswing
$\frac{3}{4}$ "	N/A	$\frac{3}{8}$ "
1"		$\frac{1}{2}$ "
$1\frac{1}{8}$ "		$\frac{5}{8}$ "
$1\frac{1}{4}$ "		$\frac{3}{4}$ "
$1\frac{3}{8}$ "	$\frac{1}{8}$ "	$\frac{7}{8}$ "
$1\frac{1}{2}$ "	$\frac{3}{8}$ "	1"

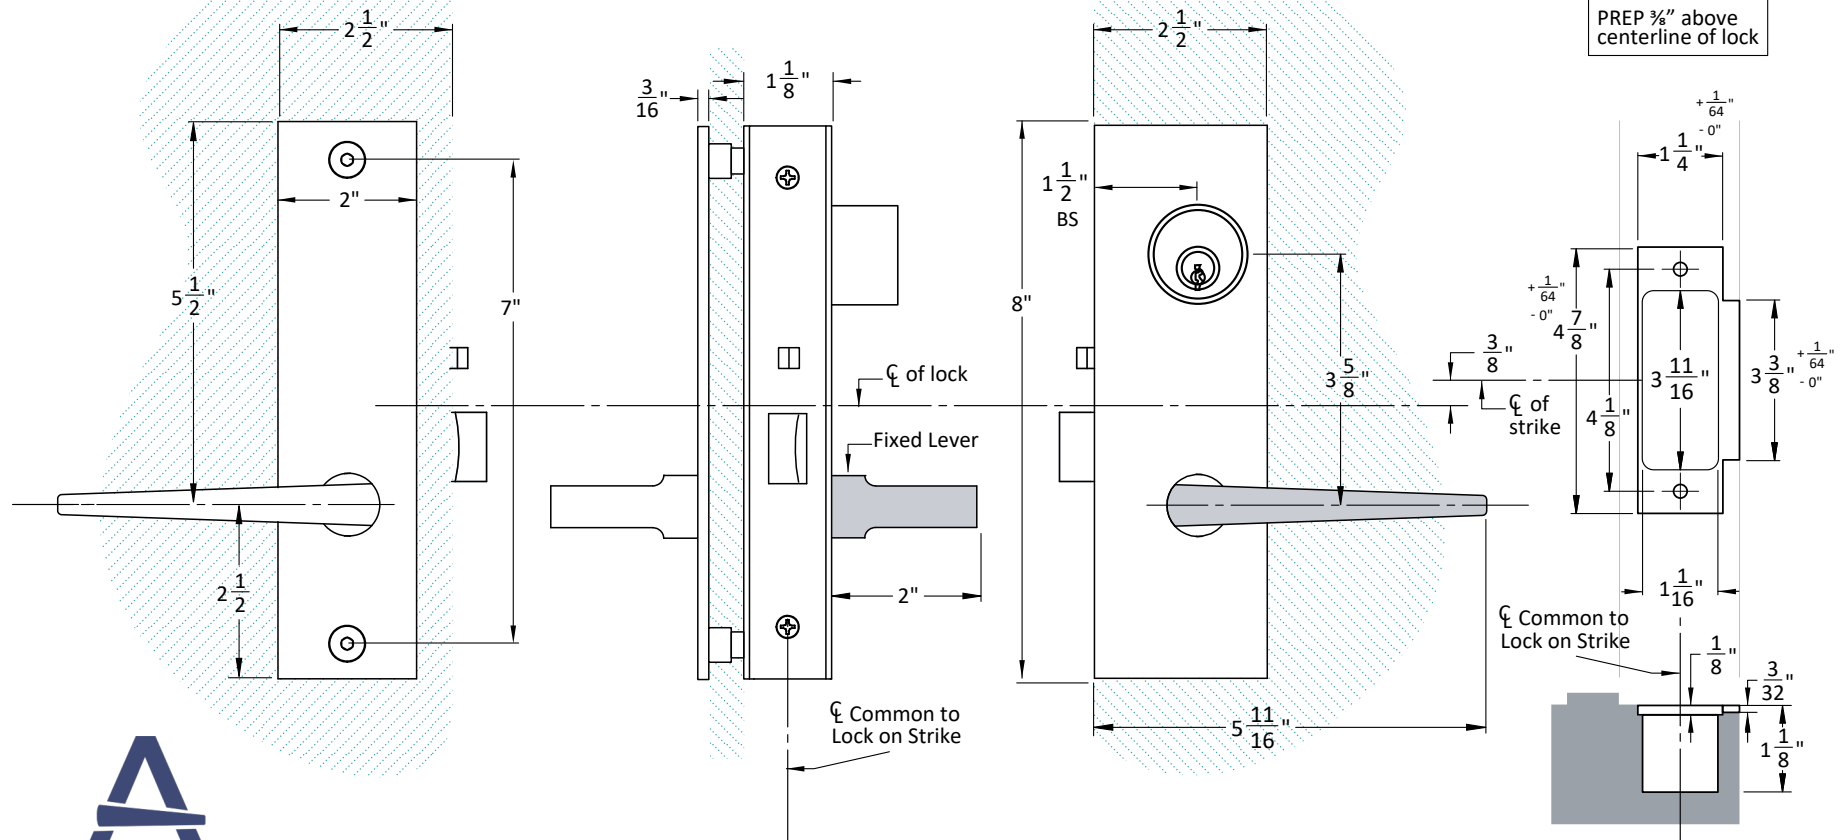

ANSI  $4\frac{7}{8}$ " Strike  
PREP  $\frac{3}{8}$ " above  
centerline of lock

RHR Glass Patch with 18L Levers.