


INSIDE OF DOOR

OUTSIDE OF DOOR

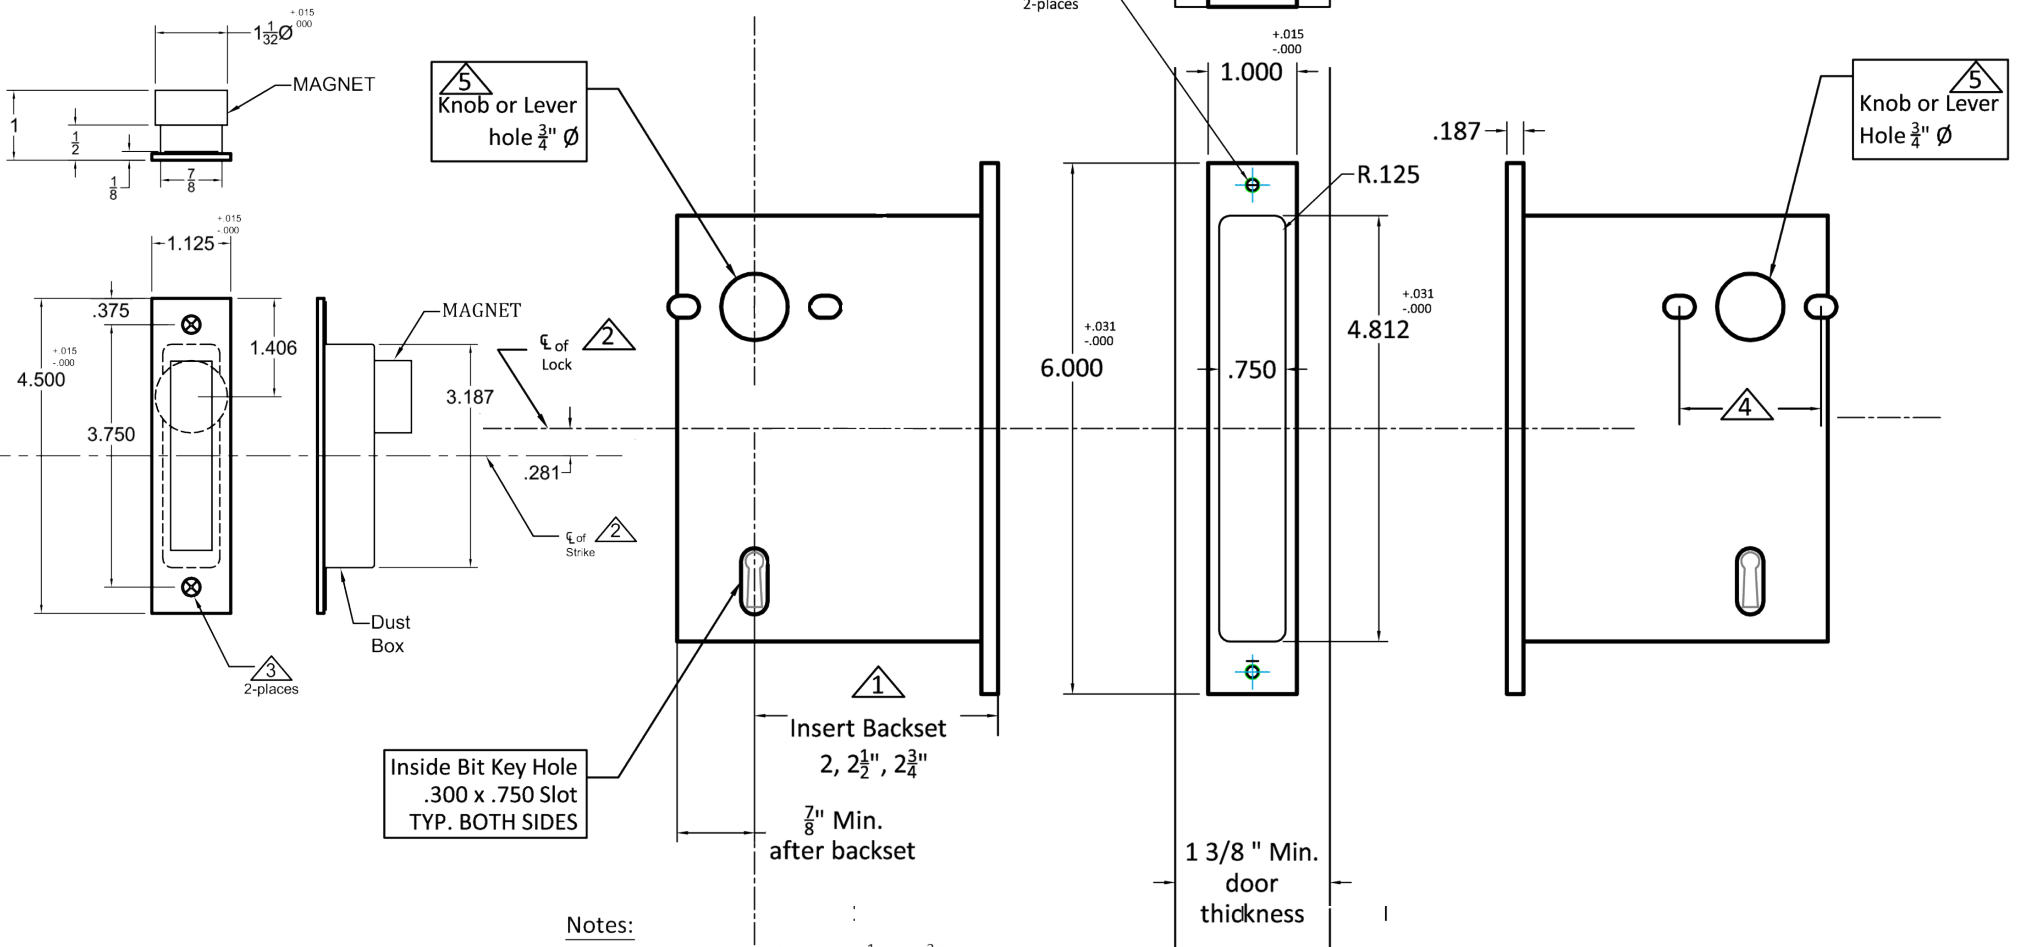

Notes:

- ⚠ Insert backset here 2'' , $2\frac{1}{2}\text{''}$ or $2\frac{3}{4}\text{''}$
- ⚠ Centerline of strike is $\frac{9}{32}\text{''}$ lower than Centerline of front.
- ⚠ Prep for #8 wood or 8-32 machine screws.
- ⚠ Through-bolting holes **ONLY** if required. See trim manufacturers standard template for details.
Accurate lock's accommodates $1\frac{1}{2}\text{''}$ to $1\frac{11}{16}\text{''}$ center to centers and up to $\frac{1}{4}\text{''}$ dia. post.
- IMPORTANT: Through-bolting holes only apply to $2\frac{1}{2}\text{''}$ and $2\frac{3}{4}\text{''}$ backset locks (there is no through-bolting on the 2'' backset version)**
- ⚠ Knob / Lever holes may vary from different trim manufacturers. Please refer to their templates to confirm these dimensions.

Additional Notes:

- a) **Responsibility:** Door and frame manufacturers are responsible for providing adequate construction or re-inforcement for proper installation of hardware shown.
- b) See Spec.9824ML for additional lock details.



ACCURATE
LOCK & HARDWARE
AMERICAN CRAFTED SINCE 1972

9824ML Interior Bit Key Magnetic
Privacy Latch - All Backsets

T-ALH.9824ML