


**IMPORTANT NOTE:**

Glass template for Glass ½"  
thick range: .469 to 531

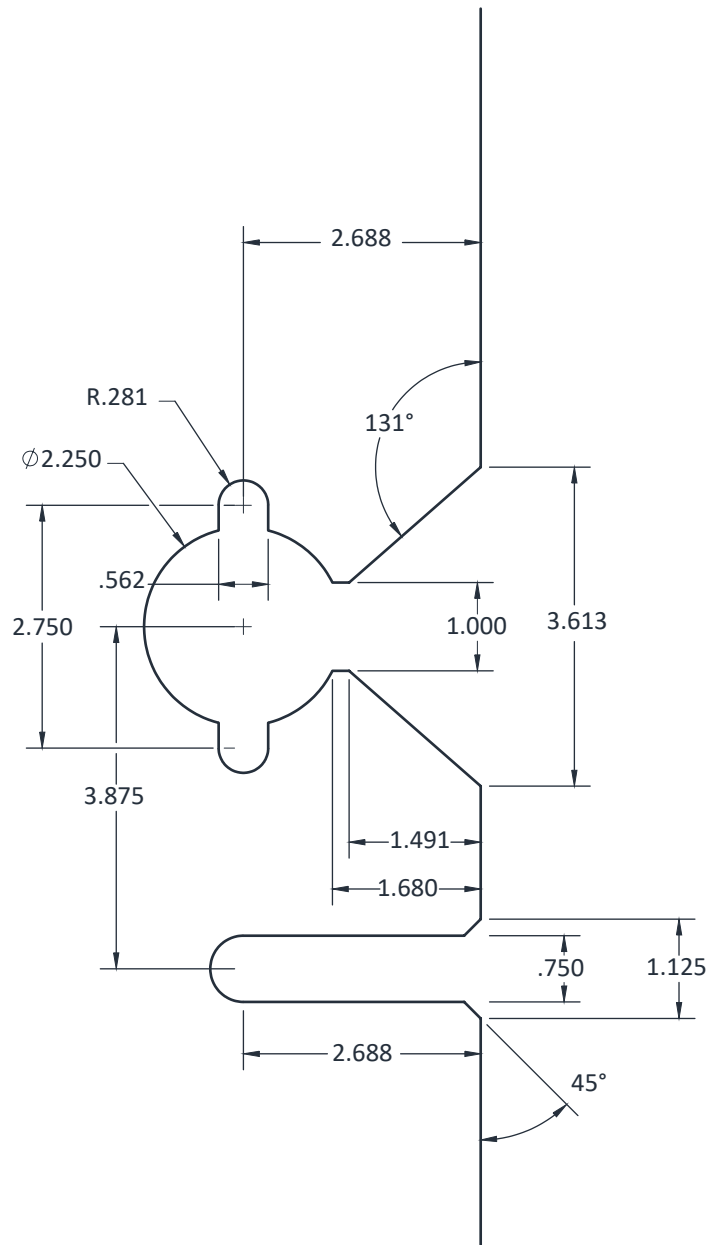

For use with:  
G-CYL-NDE  
GO-CYL-NDE  
G-CYL-NDE-GPS

Note: GPS = glass patch  
strike (G-CYL patch locks and  
patch strikes are  
prepped the same)



Standard ½" Glass Template for:  
G-CYL-NDE Cylindrical (vertical through-bolt)

T-ALH.G-CYL-NDE