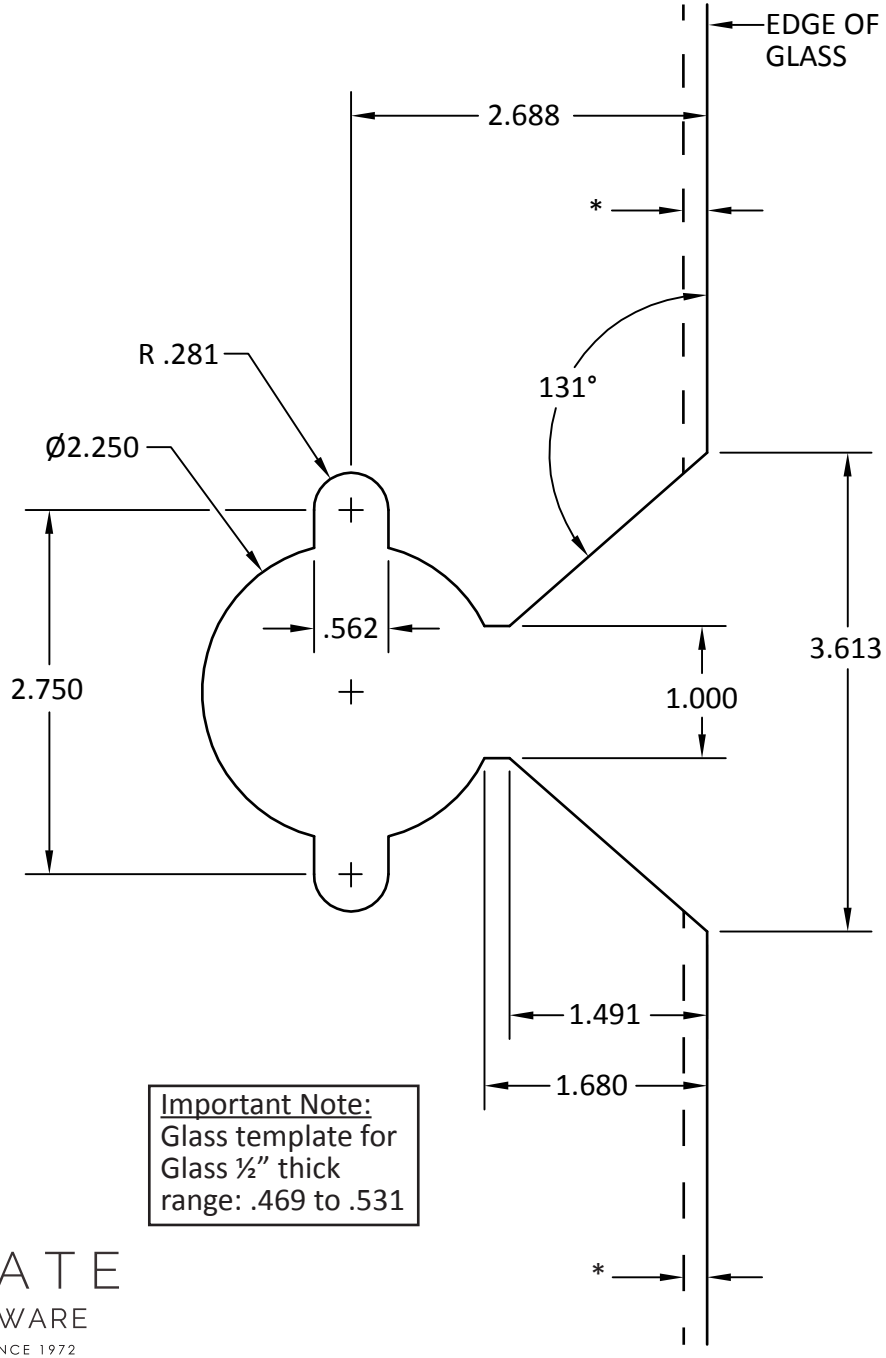

*REQUIRES METAL CHANNEL FOR WIRING.
Metal channel to be supplied by others.
Prep glass per metal channel specifications.

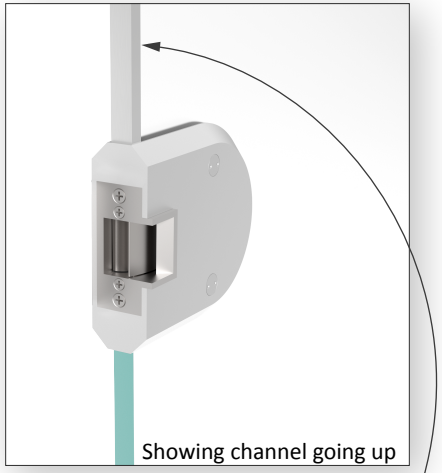



CROSS SECTION OF CHANNEL

Important Note:
Glass template for Glass ½" thick range: .469 to .531

ACCURATE
LOCK & HARDWARE
AMERICAN CRAFTED SINCE 1972

Standard 1/2" Glass Template for: G-CYL-GPS-E
Cylindrical Glass Patch Electrified Strike

T.ALH.G-CYL-GPS-E

P: 203.348.8865 W: accuratelockandhardware.com