



INSIDE OF DOOR

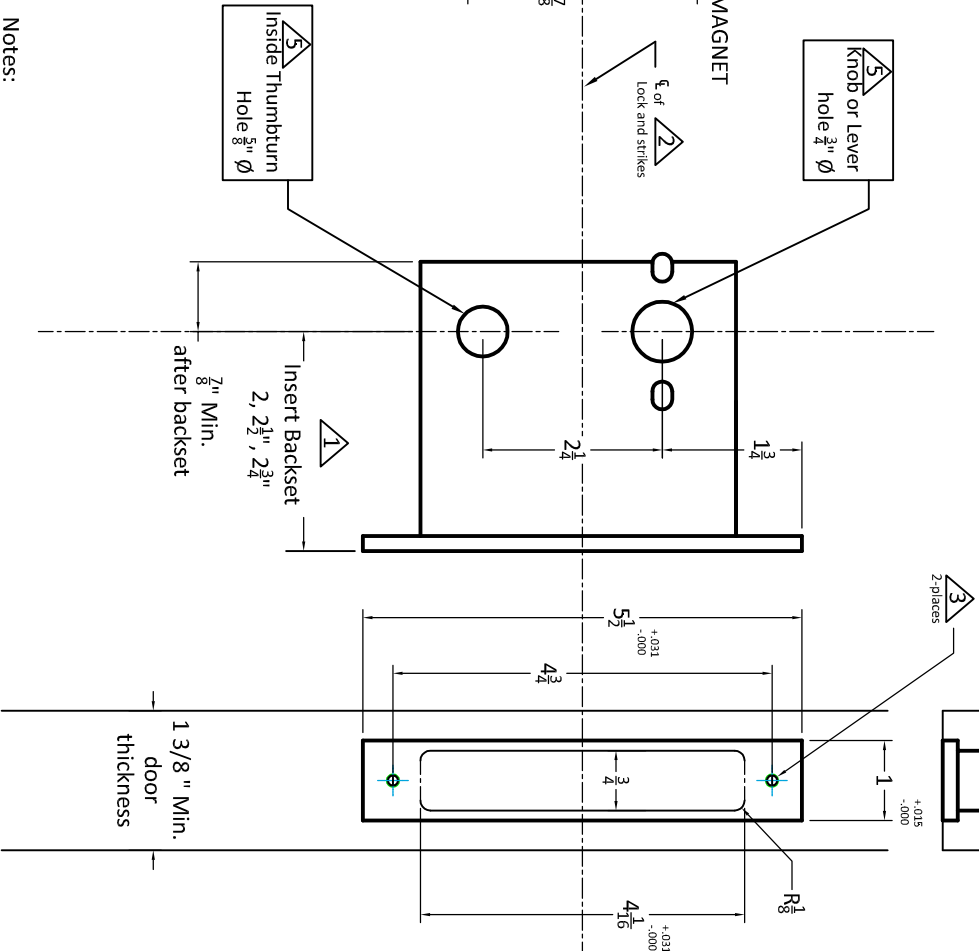

OUTSIDE OF DOOR

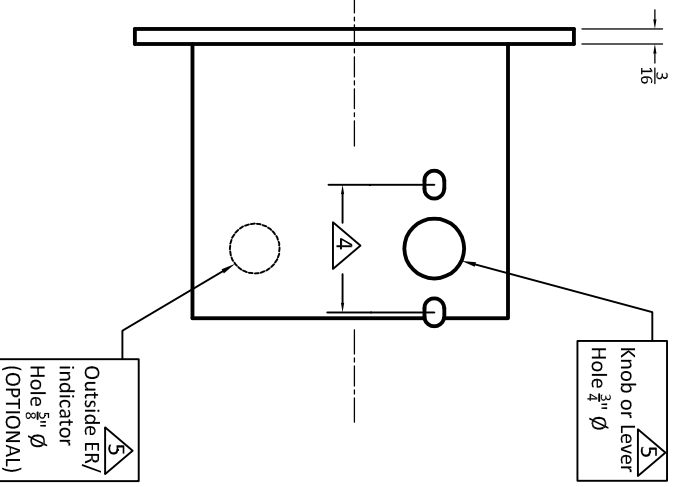

Notes:

- ▲ Insert backset here 2, 2 1/4" or 2 3/4"
 - ▲ Centerline of strike and front are the same.
 - ▲ Prep for #8 wood or 8-32 machine screws.
 - ▲ Thru bolting holes **ONLY** if required. See trim manufacturers standard template for details.
- Accurate lock's accommodates 1 1/2" to 1 11/16" center to centers and up to 1/4" dia. post.
 If there are any additional questions about the thru-bolting, please contact our office.
 Knob, thumbturn and ER holes may vary from different trim manufacturers. Please refer to their templates to confirm these dimensions.

Additional Notes:

- a) **Responsibility** : Door and frame manufacturers are responsible for providing adequate construction or re-inforcement for proper installation of hardware shown.
- b) See catalog / spec sheets for additional lock details



ACCURATE
 LOCK & HARDWARE
 AMERICAN CRAFTED SINCE 1972

Standard 9539ML Magnetic Privacy
 Lock - All Backsets

T-ALH.9539ML