



ACCURATE

LOCK & HARDWARE

AMERICAN CRAFTED SINCE 1972

OFFSET PIVOT HINGES

HANGING DOORS WITH THE LAWS OF PHYSICS

PIVOT HINGES

ELEVATING THE TASK OF HANGING A DOOR

- A variety of custom configurations and offsets allow for different door mounting and swing scenarios
- Custom made to order from 1/2" heavy duty standard or 3/8" stock brass material, bearings included
- Available in Stainless Steel
- Intermediate, Dutch Door and Center Pivots available
- Standard and custom finishes available



OFFSET PIVOT HINGES

- Sold in sets of 4 members (to hang one door)
- $\frac{1}{4}'' - \frac{3}{4}''$ offset for $\frac{3}{8}''$ member thickness
- $\frac{3}{8}'' - \frac{3}{4}''$ offset for $\frac{1}{2}''$ member thickness
- Custom offsets are available upon request





TOP
DOOR

COMMON PIVOT
CONFIGURATIONS

T1, D1, D1, B1

For 1 3/4" thick doors, with 3/8" offset

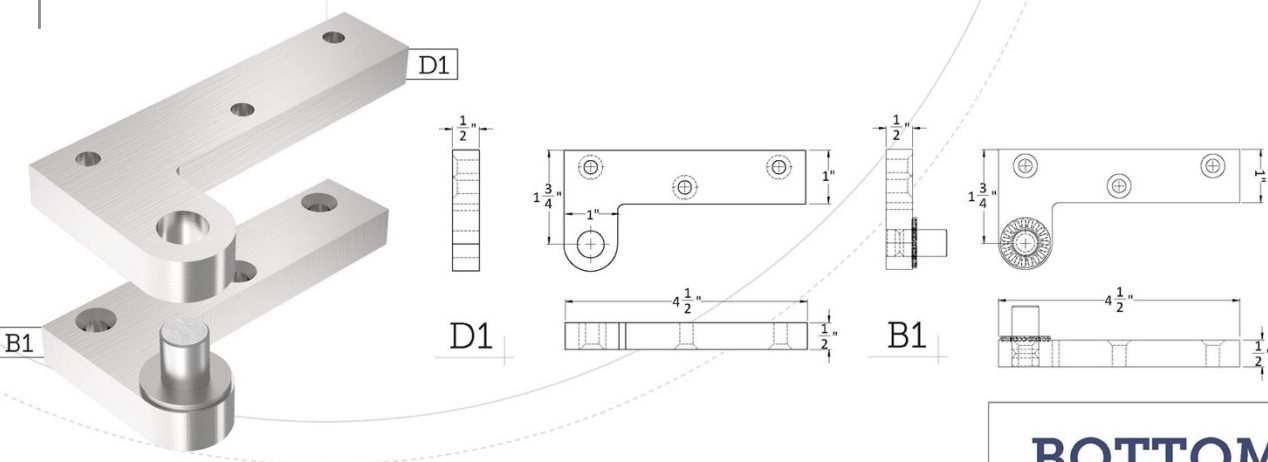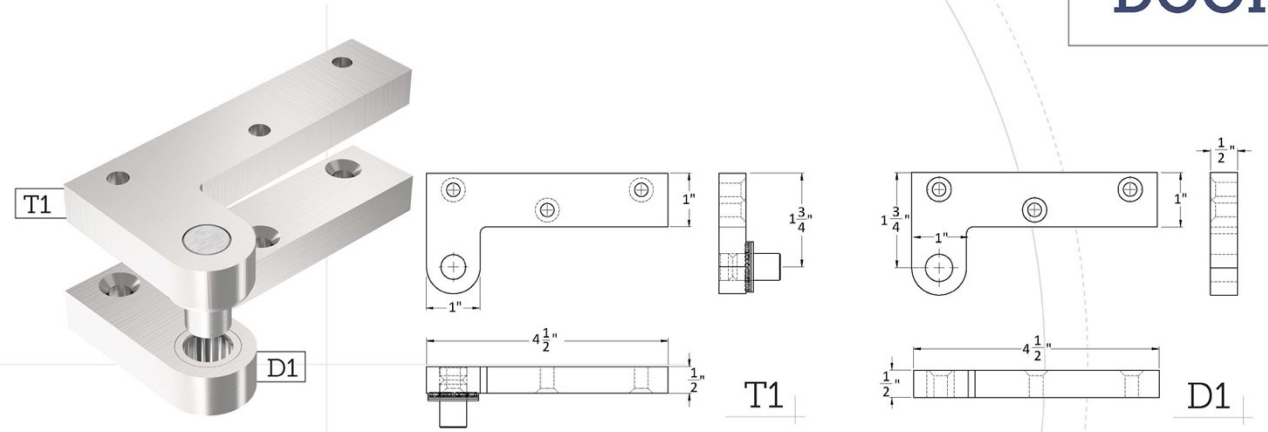

BOTTOM
DOOR

TOP
DOOR




COMMON PIVOT CONFIGURATIONS

T4, D3, D3, B2

Heel to center dimension shown

For 1³/₄" thick doors, with 3/₈" offset

B2 is resting on the floor

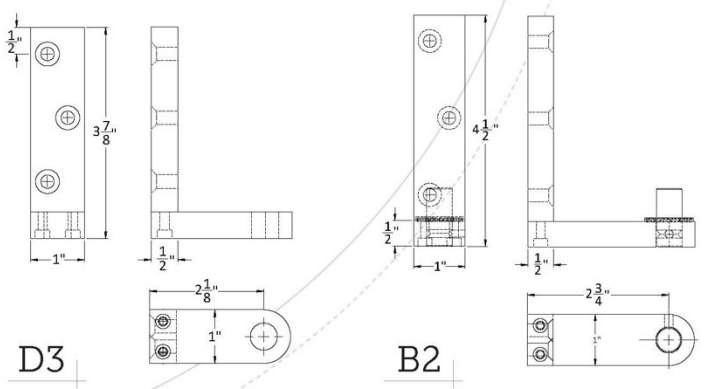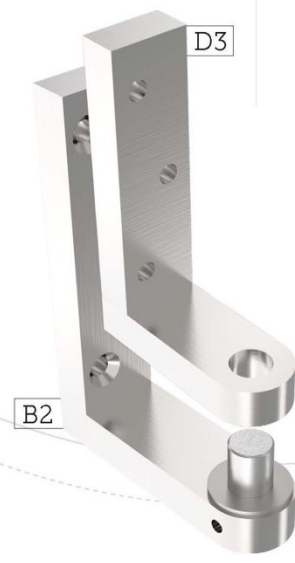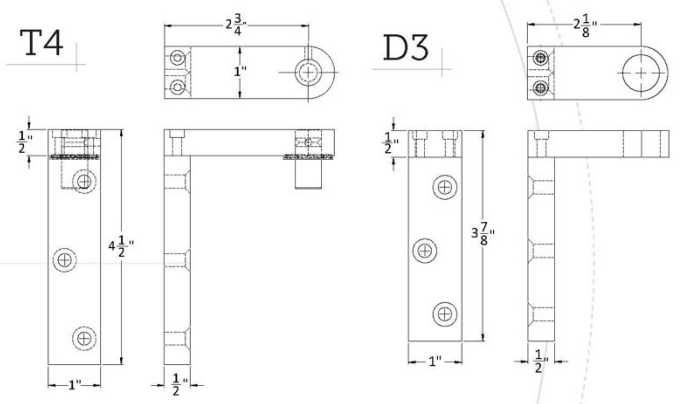


BOTTOM
DOOR

TOP
DOOR

COMMON PIVOT
CONFIGURATIONS

T1, D2, D2, B4

For 1 3/4" thick doors, with 3/8" offset

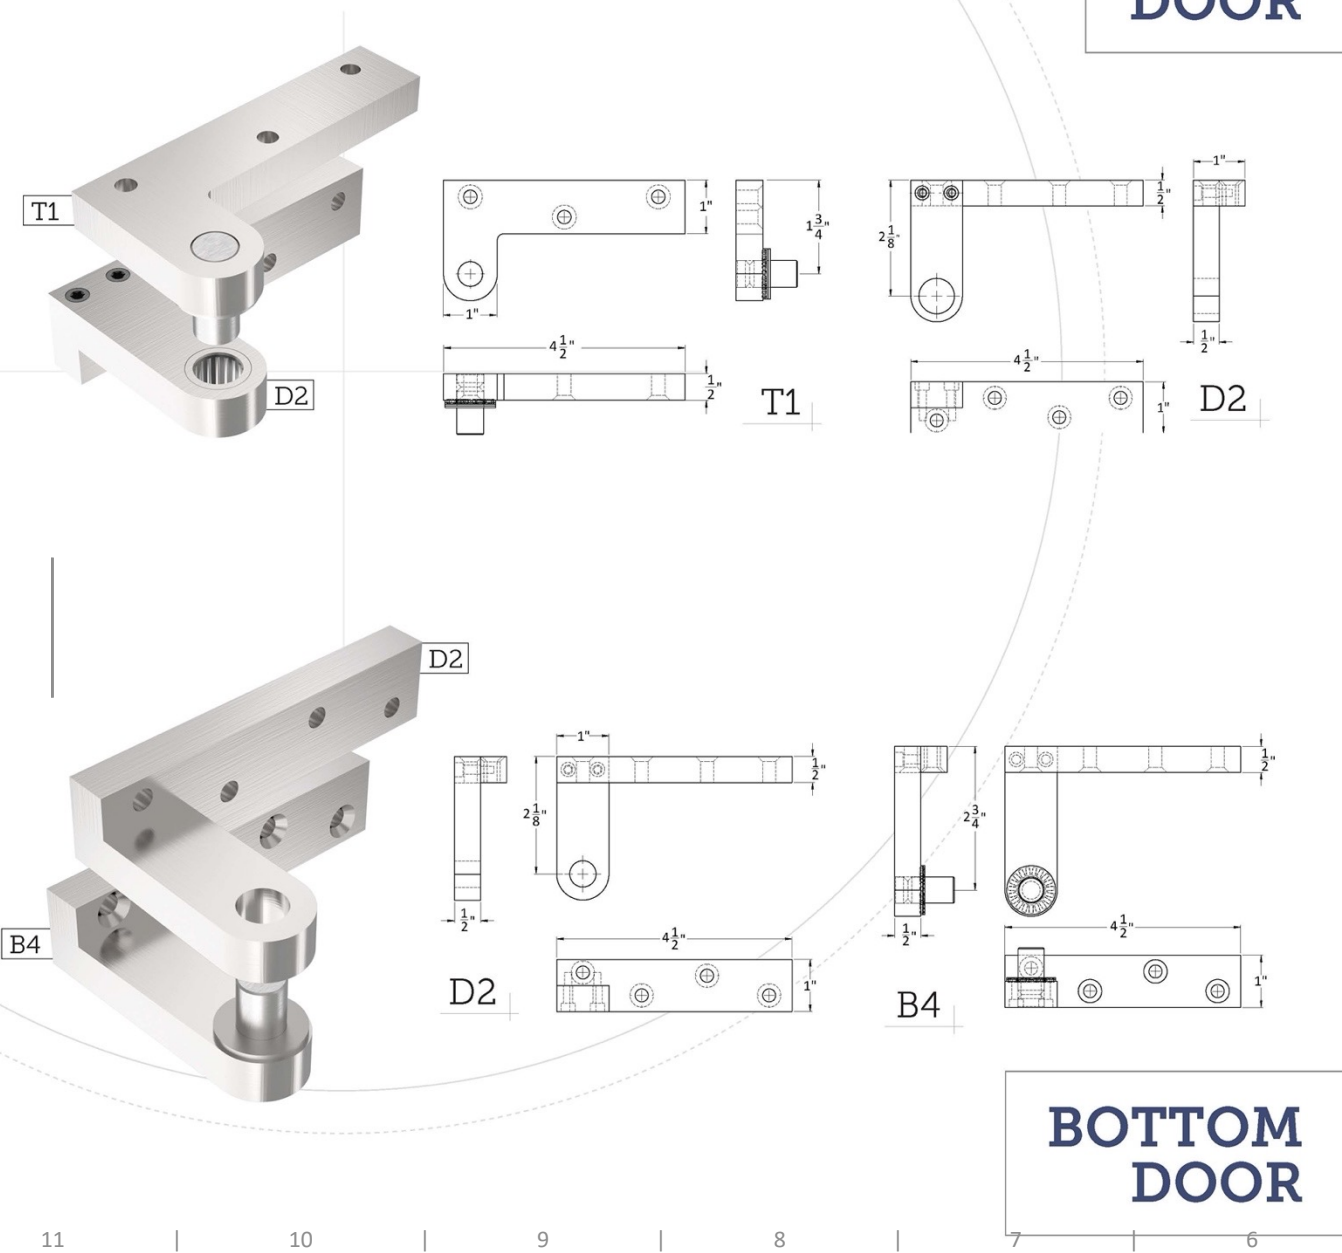






BOTTOM
DOOR

TOP
DOOR

COMMON PIVOT CONFIGURATIONS

T5, D4, D4, B3

For 1³/₄" thick doors, with 3³/₈" offset

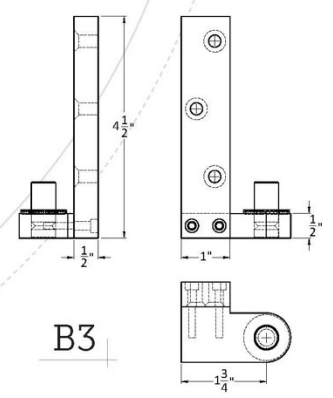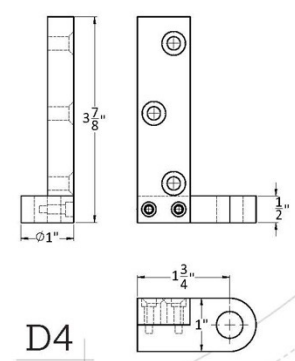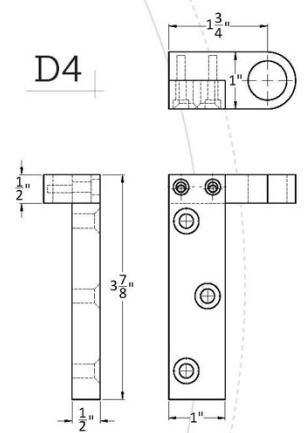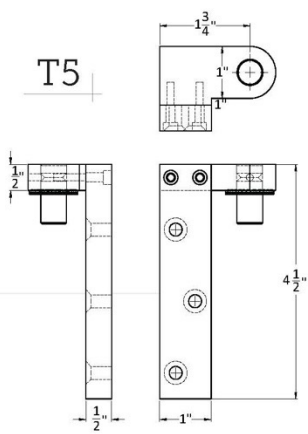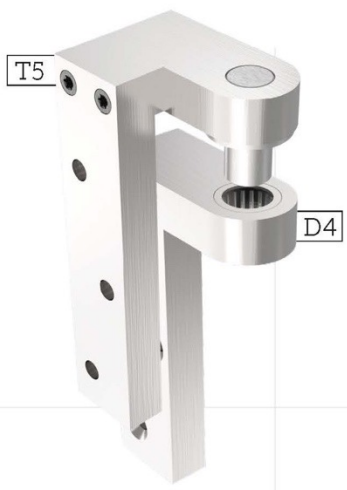

BOTTOM
DOOR

OFFSET PIVOT HINGES

INDIVIDUAL MEMBERS

TOP JAMB



T1



T2



T3



T4



T5

TOP DOOR



D1



D2



D3



D4

BOTTOM DOOR




D1



D2



D3



D4

BOTTOM JAMB / SILL or FLOOR



B1



B2



B3



B4

NOTES

- + MATERIAL SIZE:
1/2" thickness
- + ALL SHOWN AS:
RH / LHR with a 3/8" offset
from the face of a 1 3/4" door.



F1



F2



F3



F4

OFFSET PIVOT HINGES

INDIVIDUAL MEMBERS

TOP JAMB



T1



T2



T3



T4



T5

TOP DOOR



D1



D2



D3



D4

BOTTOM DOOR



D1



D2



D3



D4

BOTTOM JAMB / SILL or FLOOR



B1



B2



B3



B4

NOTES

- + MATERIAL SIZE:
3/8" thickness
- + ALL SHOWN AS:
RH / LHR with a 1/4 offset
from the face of a 1 3/4" door.



F1



F2



F3



F4

OFFSET PIVOT HINGES

COMMON CONFIGURATIONS

TOP JAMB - TOP DOOR

T1 STYLES

PAIRED WITH D STYLES
(D1,D2,D3,D4)



T2 STYLES

PAIRED WITH D STYLES
(D1,D2,D3,D4)



T3 STYLES

PAIRED WITH D STYLES
(D1,D2,D3,D4)



OFFSET PIVOT HINGES

COMMON CONFIGURATIONS

TOP JAMB - TOP DOOR

T₄ STYLES

PAIRED WITH D STYLES
(D₁, D₂, D₃, D₄)



T₅ STYLES

PAIRED WITH D STYLES
(D₁, D₂, D₃, D₄)



OFFSET PIVOT HINGES

COMMON CONFIGURATIONS

BOTTOM JAMB - BOTTOM DOOR

B1 STYLES

PAIRED WITH D STYLES
(D1,D2,D3,D4)



B2 STYLES

PAIRED WITH D STYLES
(D1,D2,D3,D4)



B3 STYLES

PAIRED WITH D STYLES
(D1,D2,D3,D4)



OFFSET PIVOT HINGES

COMMON CONFIGURATIONS

BOTTOM JAMB - BOTTOM DOOR

B4 STYLES

PAIRED WITH D STYLES
(D1,D2,D3,D4)



F1 STYLES

PAIRED WITH D STYLES
(D1,D2,D3,D4)



F2 STYLES

PAIRED WITH D STYLES
(D1,D2,D3,D4)



OFFSET PIVOT HINGES

COMMON CONFIGURATIONS

BOTTOM JAMB - BOTTOM DOOR

F₃ STYLES

PAIRED WITH D STYLES
(D₁, D₂, D₃, D₄)



F₄ STYLES

PAIRED WITH D STYLES
(D₁, D₂, D₃, D₄)




Floor Mount Options



F1
Carpet Installation



F2
Tile Installation

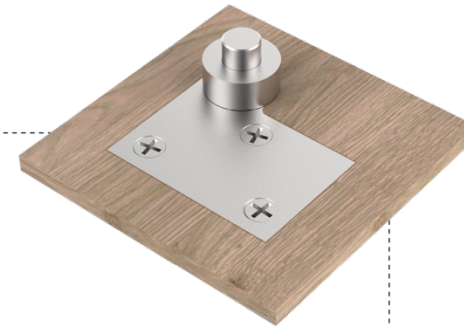

F3
Wood Floor Installation




F4
Wood Floor Installation

Note: F2 can also be used on stone and concrete.

HOW TO SPECIFY

HANDING

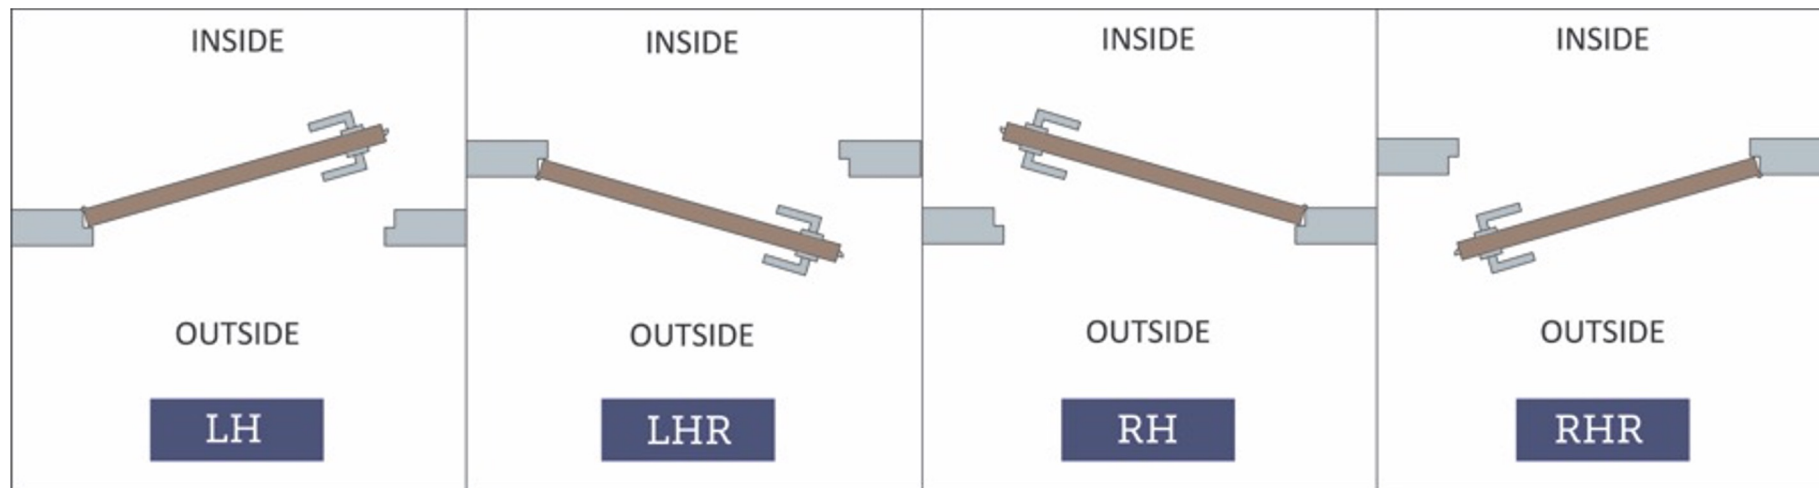

FINISHES

GROUP 1: US4, US4NL, US26D

GROUP 2: US3, US3NL, US26, US10B, US14, US15, US19

GROUP 3: BN, BB, TN, TB, DURO, ESN, US15A, US5, US19LL

Pivots can also be ordered in Stainless Steel. Specify Finish Group 2T.

To view example of finishes visit: [Accurate Finishes](#).



HOW TO SPECIFY

	CONFIGURATION												
	QTY	TOP MEMBER	TOP DOOR	BOTTOM DOOR	BOTTOM/FLOOR MEMBER	MATERIAL THICKNESS	HANDING	FINISH	DOOR THICKNESS	PIVOT OFFSET	UNDERCUT OF DOOR	INTER-MEDIATE	ANY SPECIAL REQUIREMENTS/ CONDITIONS (APPLIED MOLDING, BASE BOARD, MIRROR, ETC.)*
E.G.	1	T1	D1	D1	B3	½"	RH	US15	1 ¾"	¾"	¾"	iT5,iD4	

Custom options available, please call for assistance.

HOW TO SPECIFY



EXAMPLES

Offset Pivots | 3/8" Thickness

E.g.: 3/8.T1, D1, D1, F4.LH.US4.134.1/4

Offset Pivots | 1/2" Thickness Heavy Duty Standard

E.g.: 1/2.T5, D1, D1, B3.LH.US19.134.3/8

Offset Pivots | 1/2" Thickness Heavy Duty Standard

E.g.: 1/2.T1, D1, D1, B1.RH.TN.134.3/8

Custom options available, please call for assistance.

NOTES

- Sold in sets of 4 members (to hang one door)
- Custom offsets and sizes available upon request

**ACCURATE LOCK & HARDWARE
MANUFACTURERS OF LOCKS AND
CUSTOM ARCHITECTURAL HARDWARE**

1 Annie Place | Stamford, CT 06902

P: 203.348.8865

F: 203.348.5234

E: sales@accuratelockandhardware.com

www.accuratelockandhardware.com

AMERICAN CRAFTSMAN
— SINCE 1972 —