



ACCURATE

LOCK & HARDWARE

AMERICAN CRAFTED SINCE 1972

OFFSET PIVOT HINGES

HANGING DOORS WITH THE LAWS OF PHYSICS

PIVOT HINGES




ELEVATING THE TASK OF HANGING A DOOR

- A variety of custom configurations and offsets allow for different door mounting and swing scenarios
- Custom made to order from 1/2" heavy duty standard or 3/8" stock brass material, bearings included
- Available in Stainless Steel
- Intermediate, Dutch Door and Center Pivots available
- Standard and custom finishes available



OFFSET PIVOT HINGES

- Sold in sets of 4 members (to hang one door)
- $\frac{1}{4}" - \frac{3}{4}"$ offset for $\frac{3}{8}"$ member thickness
- $\frac{3}{8}" - \frac{3}{4}"$ offset for $\frac{1}{2}"$ member thickness
- Custom offsets are available upon request

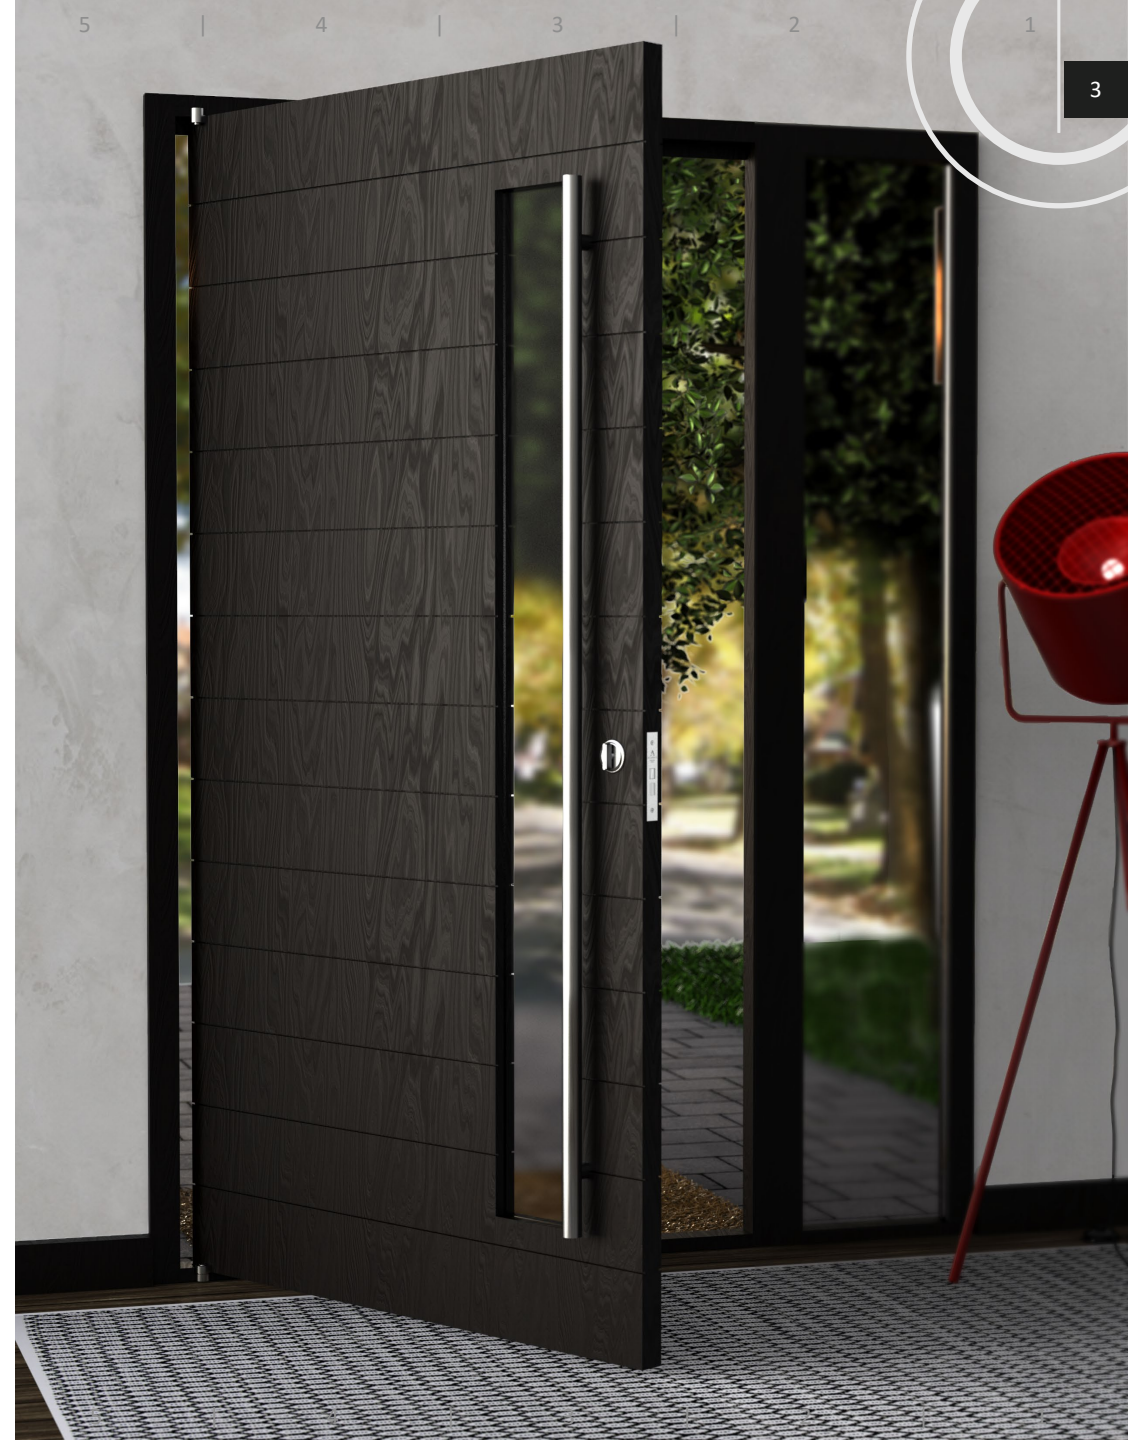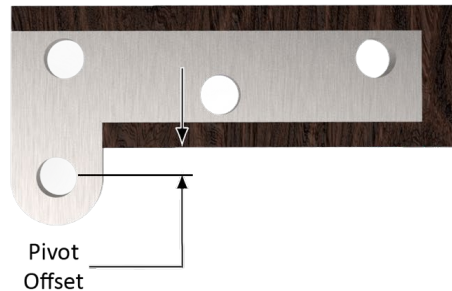
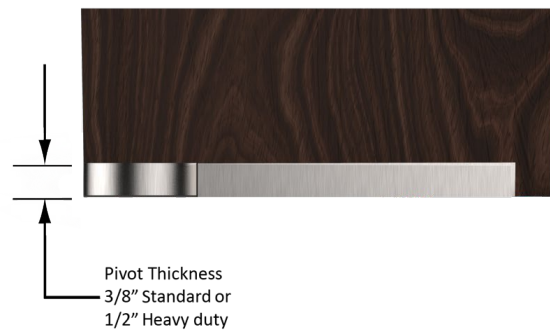


TOP
DOOR

COMMON PIVOT
CONFIGURATIONS

T1, D1, D1, B1

Example shown for:
For 1 3/4" thick doors, with 3/8" offset

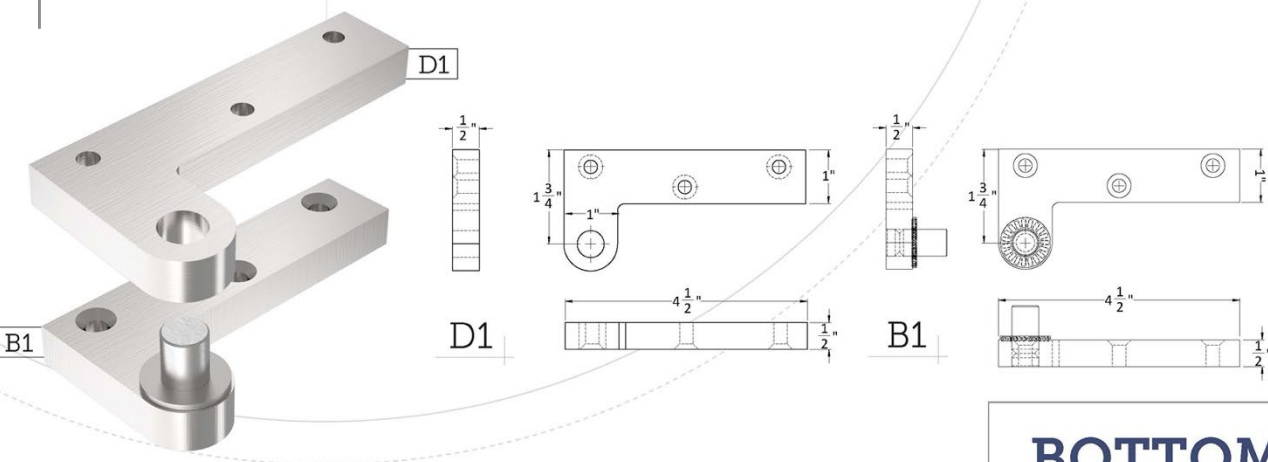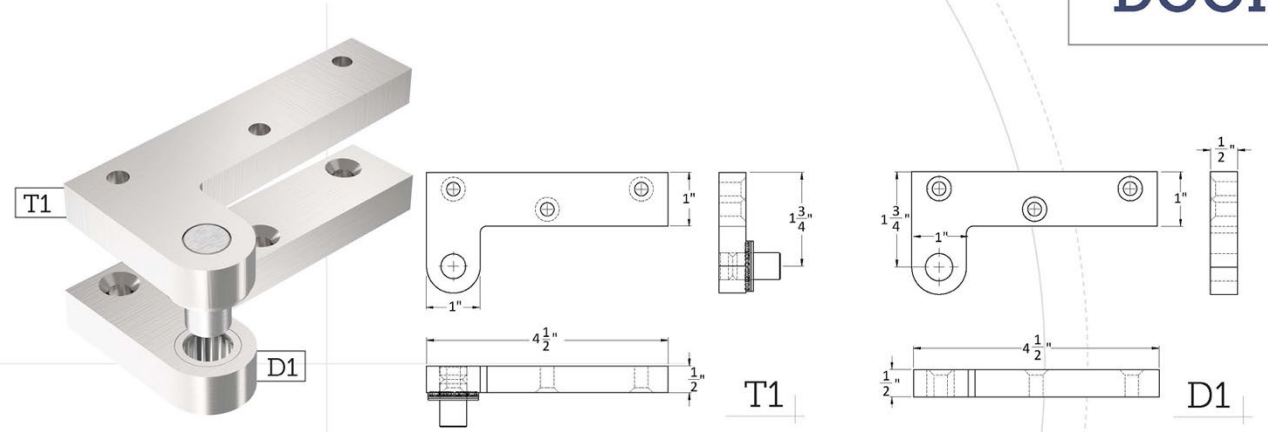

BOTTOM
DOOR

TOP
DOOR

COMMON PIVOT CONFIGURATIONS



T4, D3, D3, B2

Heel to center dimension shown

Example shown for:

For $1\frac{3}{4}$ " thick doors, with $\frac{3}{8}$ " offset

B2 is resting on the floor

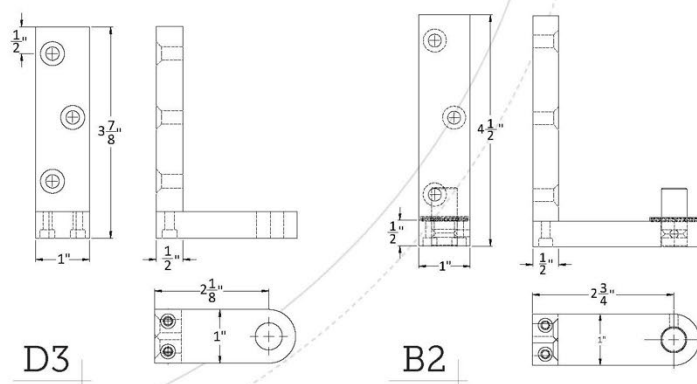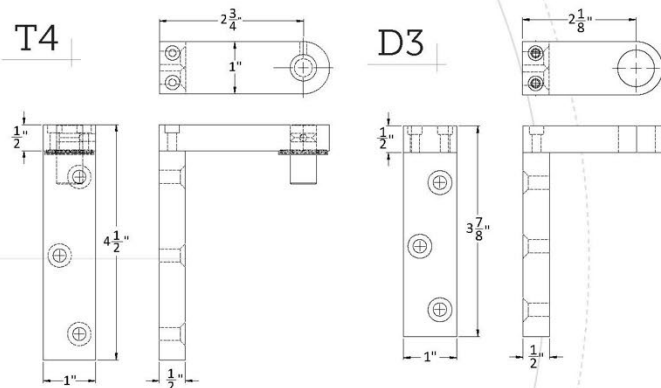


BOTTOM
DOOR

TOP
DOOR

COMMON PIVOT
CONFIGURATIONS

T1, D2, D2, B4

Example shown for:
For 1 3/4" thick doors, with 3/8" offset

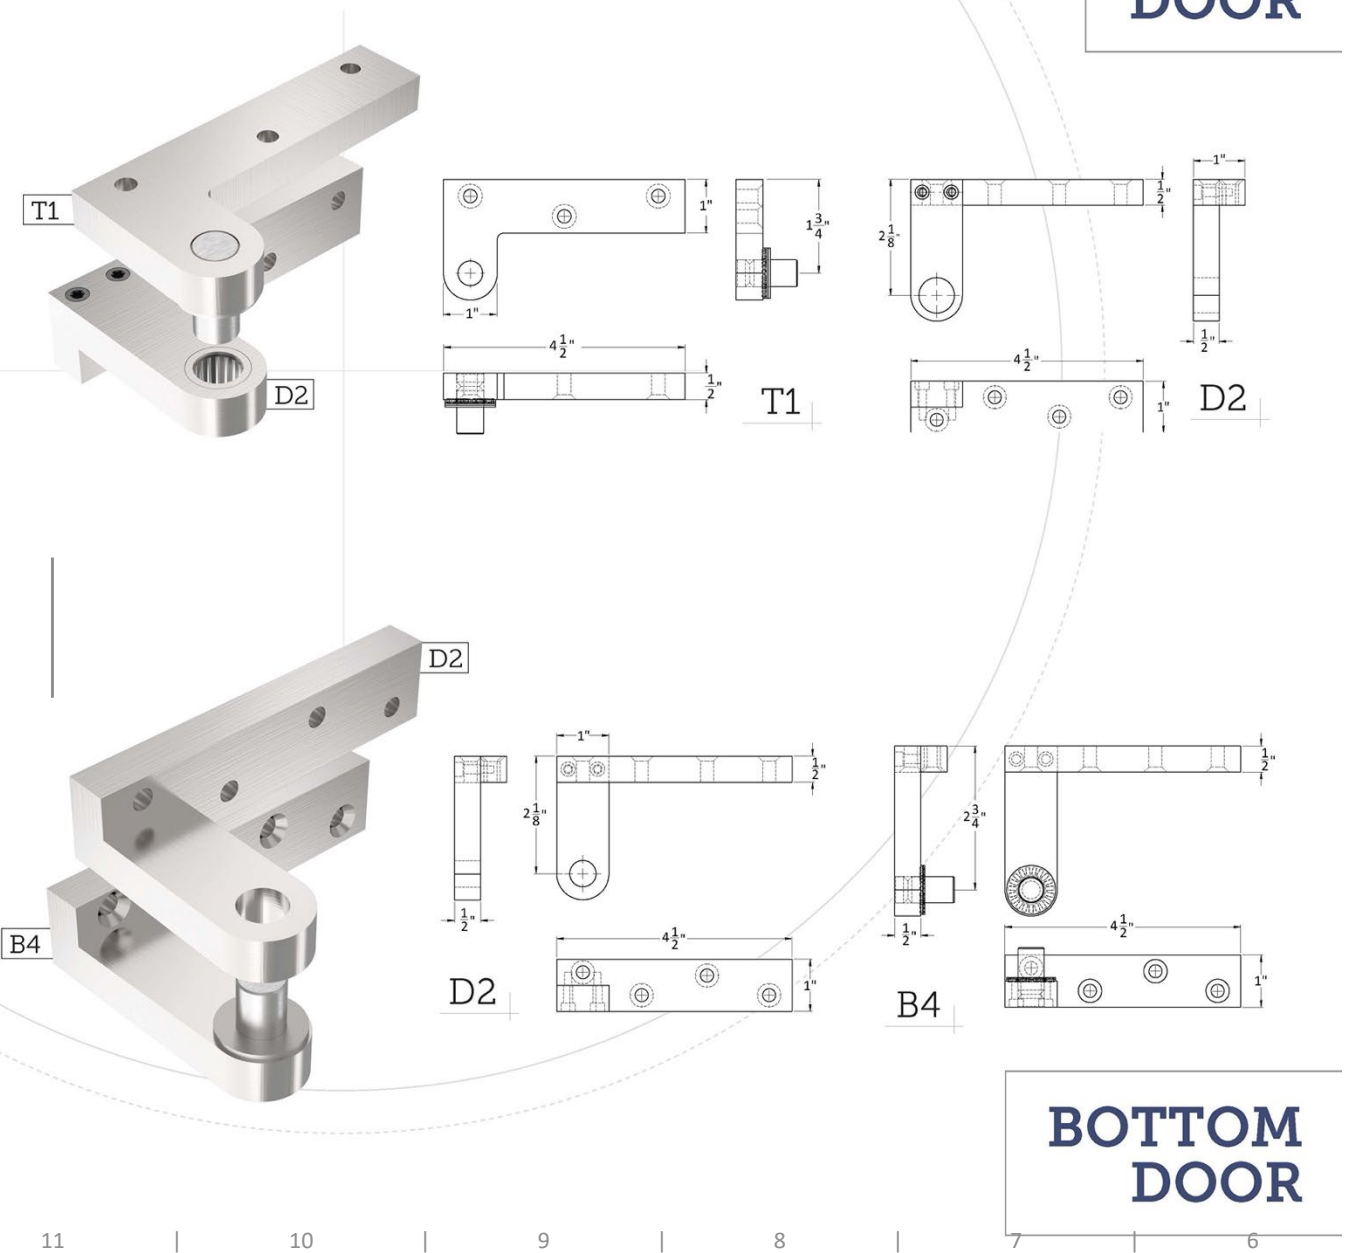





BOTTOM
DOOR

TOP
DOOR

COMMON PIVOT CONFIGURATIONS

T5, D4, D4, B3

Example shown for:
For 1 3/4" thick doors, with 3/8" offset

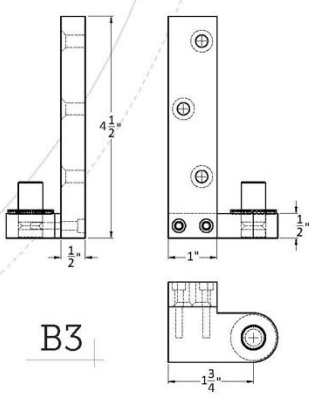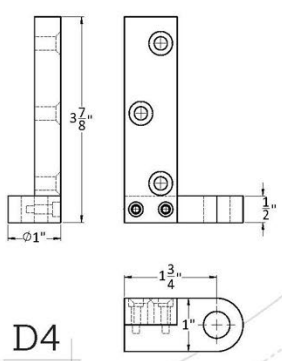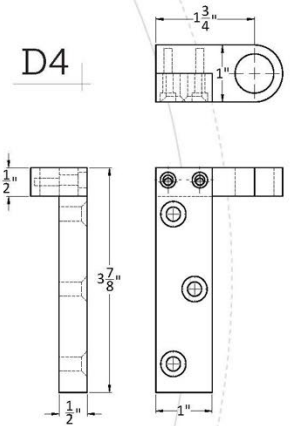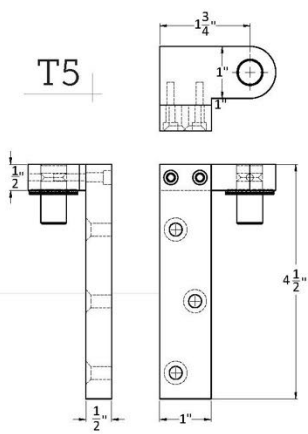

BOTTOM
DOOR

OFFSET PIVOT HINGES

INDIVIDUAL MEMBERS

TOP JAMB



T1



T2



T3



T4



T5

TOP DOOR



D1



D2




D3



D4

BOTTOM DOOR



D1



D2



D3



D4

BOTTOM JAMB / SILL or FLOOR



B1



B2



B3



B4

NOTES


- + MATERIAL SIZE:
1/2" thickness
- + ALL SHOWN AS:
RH / LHR with a 3/8" offset
from the face of a 1 3/4" door.



F1



F2



F3



F4

OFFSET PIVOT HINGES

INDIVIDUAL MEMBERS

TOP JAMB



T1



T2



T3



T4



T5

TOP DOOR



D1



D2



D3



D4

BOTTOM DOOR



D1



D2



D3



D4

BOTTOM JAMB / SILL or FLOOR



B1




B2



B3



B4




F1



F2



F3



F4

NOTES

- + MATERIAL SIZE:
3/8" thickness
- + ALL SHOWN AS:
RH / LHR with a 1/4" offset from
the face of a 1 3/4" door.

OFFSET PIVOT HINGES

COMMON CONFIGURATIONS

TOP JAMB - TOP DOOR

T1 STYLES

PAIRED WITH D STYLES
(D1,D2,D3,D4)



T2 STYLES

PAIRED WITH D STYLES
(D1,D2,D3,D4)



T3 STYLES

PAIRED WITH D STYLES
(D1,D2,D3,D4)



OFFSET PIVOT HINGES

COMMON CONFIGURATIONS

TOP JAMB - TOP DOOR

T₄ STYLES

PAIRED WITH D STYLES
(D₁, D₂, D₃, D₄)



T₅ STYLES

PAIRED WITH D STYLES
(D₁, D₂, D₃, D₄)



OFFSET PIVOT HINGES

COMMON CONFIGURATIONS

BOTTOM JAMB - BOTTOM DOOR

B1 STYLES

PAIRED WITH D STYLES
(D1,D2,D3,D4)



B2 STYLES

PAIRED WITH D STYLES
(D1,D2,D3,D4)



B3 STYLES

PAIRED WITH D STYLES
(D1,D2,D3,D4)



OFFSET PIVOT HINGES

COMMON CONFIGURATIONS

BOTTOM JAMB - BOTTOM DOOR

B4 STYLES

PAIRED WITH D STYLES
(D1,D2,D3,D4)



F1 STYLES

PAIRED WITH D STYLES
(D1,D2,D3,D4)



F2 STYLES

PAIRED WITH D STYLES
(D1,D2,D3,D4)



OFFSET PIVOT HINGES
COMMON CONFIGURATIONS

BOTTOM JAMB - BOTTOM DOOR

F3 STYLES

PAIRED WITH D STYLES
(D1,D2,D3,D4)



F4 STYLES


PAIRED WITH D STYLES
(D1,D2,D3,D4)




Floor Mount Options




F1
Carpet Installation

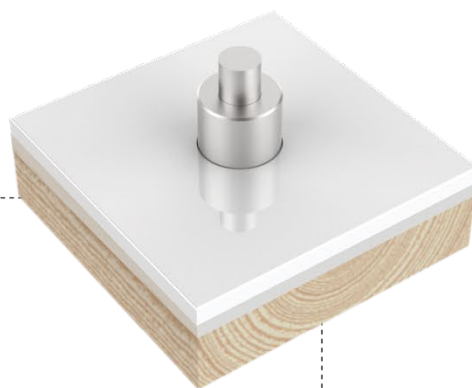

F2
Tile Installation

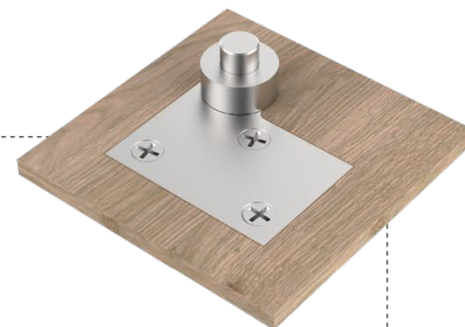

F3
Wood Floor Installation

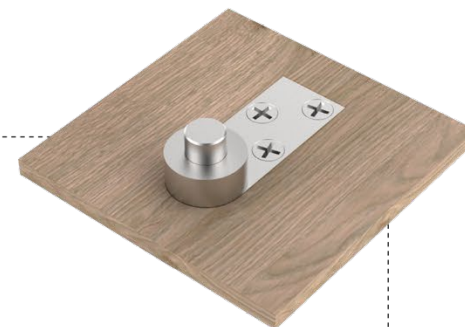


F4
Wood Floor Installation

Note: F2 can also be used on stone and concrete.

HOW TO SPECIFY

HANDING

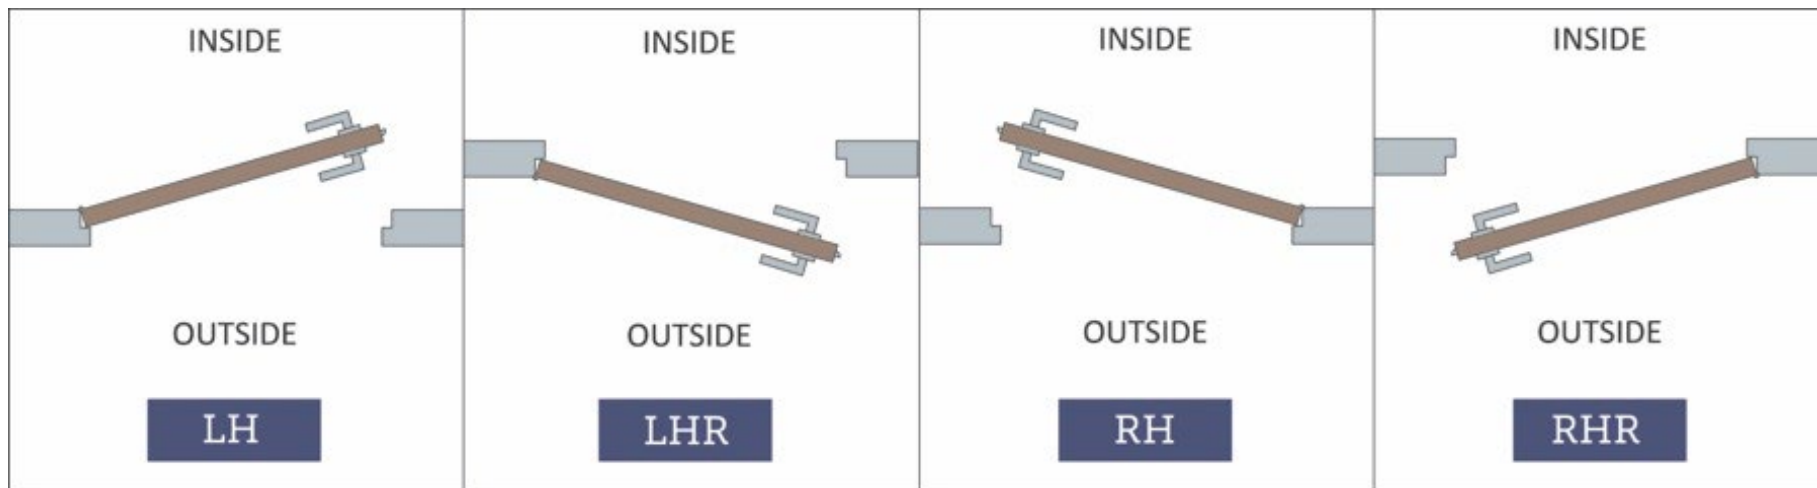

FINISHES


GROUP 1: US4, US4NL, US26D

GROUP 2: US3, US3NL, US26, US10B, US14, US15, US19

GROUP 3: BN, BB, TN, TB, DURO, ESN, US15A, US5, US19LL

Pivots can also be ordered in Stainless Steel. Specify Finish Group 2T.

To view example of finishes visit: [Accurate Finishes](#).

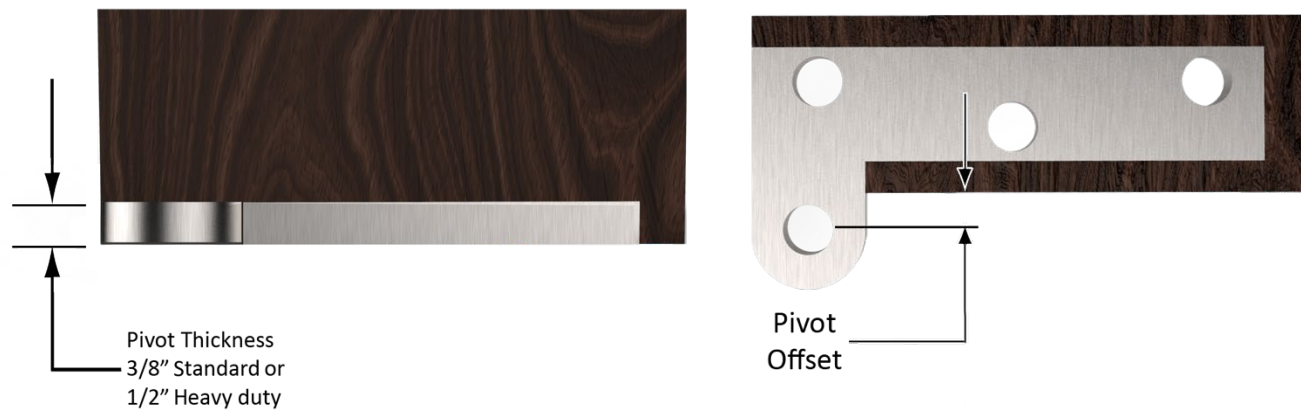

HOW TO SPECIFY

	CONFIGURATION												
	QTY	TOP MEMBER	TOP DOOR	BOTTOM DOOR	BOTTOM/FLOOR MEMBER	MATERIAL THICKNESS	HANDING	FINISH	DOOR THICKNESS	PIVOT OFFSET	UNDERCUT OF DOOR	INTER-MEDIATE	ANY SPECIAL REQUIREMENTS/ CONDITIONS (APPLIED MOLDING, BASE BOARD, MIRROR, ETC.)*
E.G.	1	T1	D1	D1	B3	½"	RH	US15	1 ¾"	¾"	¾"	iT5,iD4	

Custom options available, please call for assistance.

HOW TO SPECIFY



EXAMPLES

Offset Pivots | $\frac{3}{8}$ " Thickness

E.g.: $\frac{3}{8}$.T1, D1, D1, F4.LH.US4.134. $\frac{1}{4}$

Offset Pivots | $\frac{1}{2}$ " Thickness Heavy Duty Standard

E.g.: $\frac{1}{2}$.T5, D1, D1, B3.LH.US19.134. $\frac{3}{8}$

Offset Pivots | $\frac{1}{2}$ " Thickness Heavy Duty Standard

E.g.: $\frac{1}{2}$.T1, D1, D1, B1.RH.TN.134. $\frac{3}{8}$

Custom options available, please call for assistance.

NOTES

- Sold in sets of 4 members (to hang one door)
- Custom offsets and sizes available upon request

ACCURATE LOCK & HARDWARE MANUFACTURERS OF LOCKS AND CUSTOM ARCHITECTURAL HARDWARE

1 Annie Place | Stamford, CT 06902

P: 203.348.8865

F: 203.348.5234

E: sales@accuratelockandhardware.com

www.accuratelockandhardware.com



AMERICAN CRAFTERS
— SINCE 1972 —