



ACCURATE

LOCK & HARDWARE

AMERICAN CRAFTED SINCE 1972

LR-SW-SH-G Ligature Resistant Swinging Shower Door with Gasketing

TO PROVIDE SAFETY + PRIVACY FOR PATIENT BATHROOMS




LR-SW-SH-G Ligature Resistant Swinging Shower Door with Gasketing


The patented Ligature Resistant Swinging Shower Door with Gasketing (LR-SW-SH-G) is designed to be a solution that provides improved safety and privacy in patient showers. This self-centering door operates without springs, which removes possible ligature points and allows the door to swing in both directions. A Thick but flexible gasketing on the door edge reduces watershed from the shower cubicle making it a safer alternative to a shower curtain.

LR-SW-SH-G Ligature Resistant Swinging Shower Door with Gasketing

OPEN

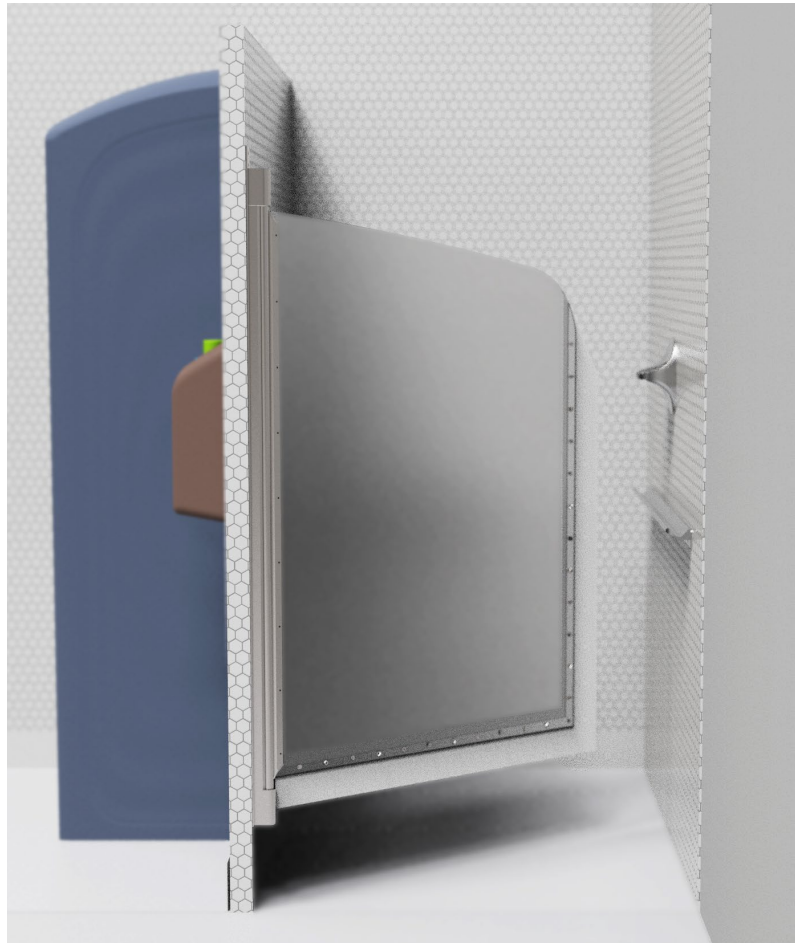


CLOSED

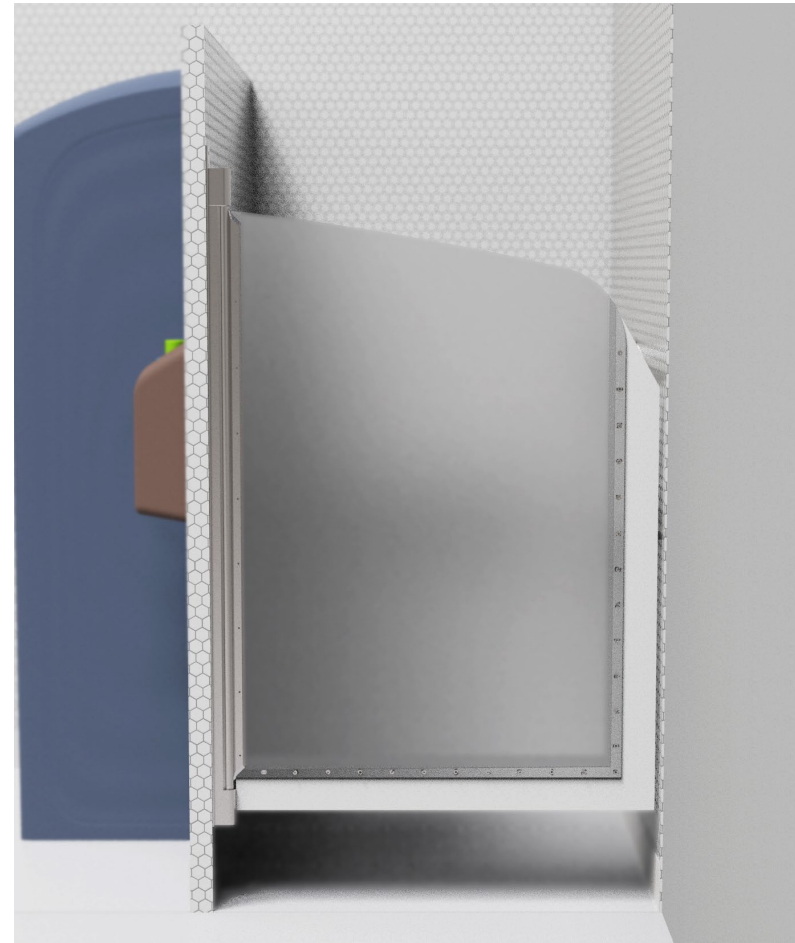


LR-SW-SH-G Ligature Resistant Swinging Shower Door with Gasketing

SINGLE AND DOUBLE DOOR APPLICATIONS AVAILABLE

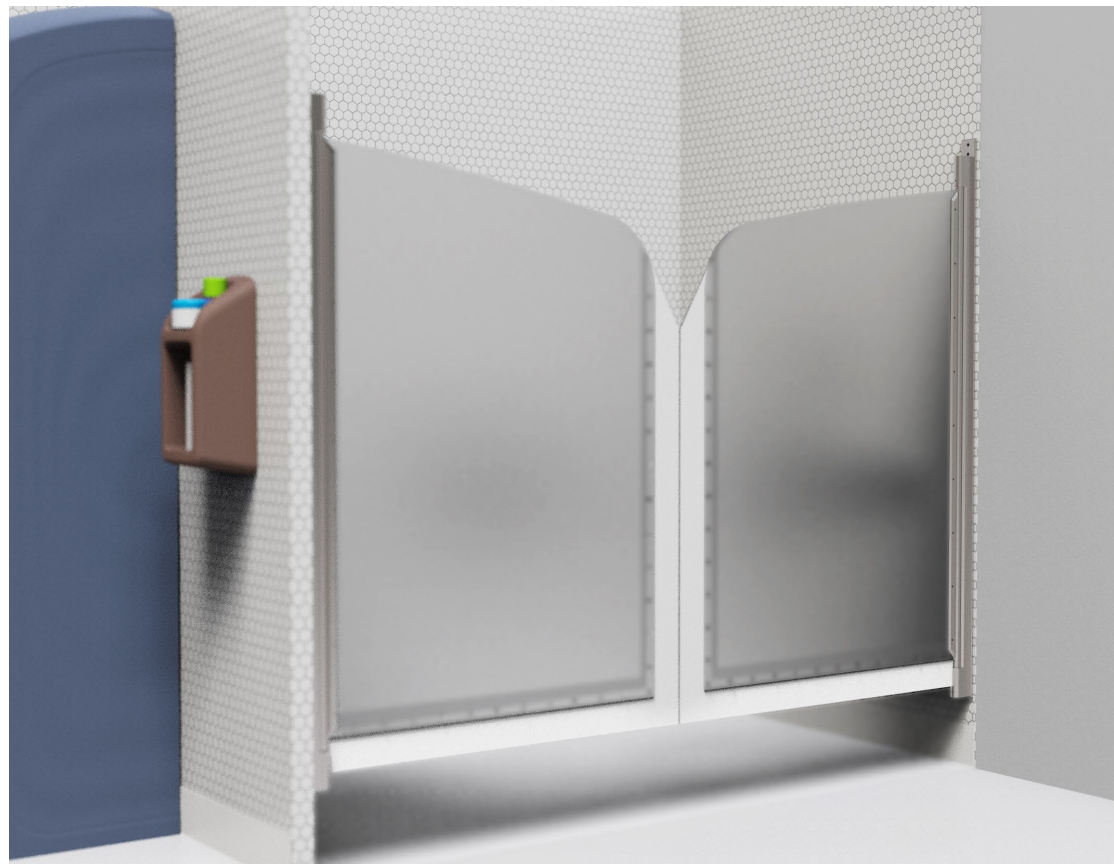

LR-SW-SH-G DOOR OPTIONS

- The LR-SW-SH-G system is specifically designed for shower areas due to elongated gasketing around the door's exposed edges and anodized aluminum, hard-coated components, with a stainless steel rod for durability.
- The gasketing creates a boundary that helps prevent water from escaping the shower area—reducing the risk of slips and falls.
- The braided nylon poly-coated strapping is waterproof, odor-proof, and mold-resistant. It won't stretch out, stays strong over time, and is flexible and easy to clean, making it a reliable choice for a shower door application.
- Beyond functionality, the clean, finished look of a door provides a sense of privacy and dignity for patients, fostering a feeling of respect.
- For proper installation, specify the hinge surface to ensure the correct fasteners are provided (e.g., TAPCON screws for concrete installations).

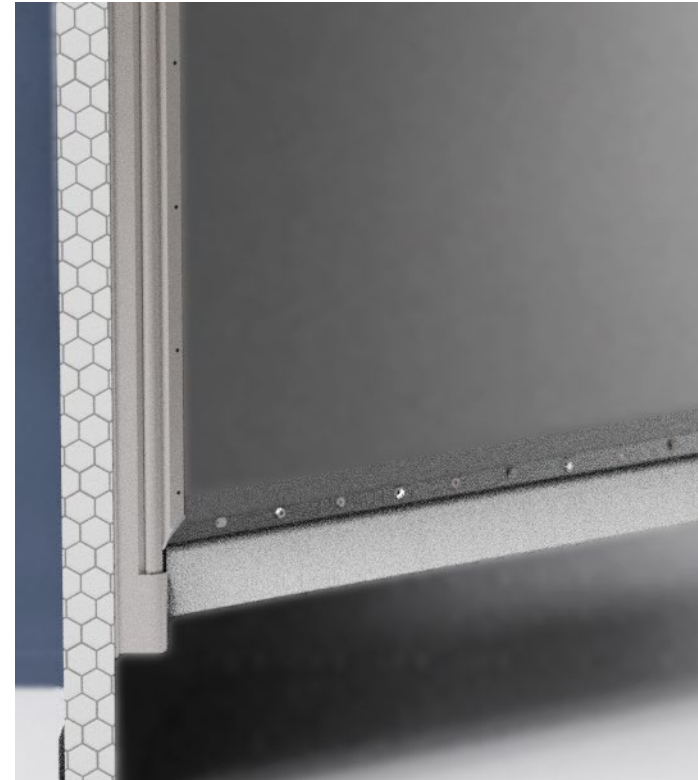

LR-SW-SH-G DOOR OPTIONS

FROSTED POLYCARBONATE



LR-SW-SH-G DOOR OPTIONS


HDPE PLASTIC COLOR OPTIONS

Specify HDPE.COLOR

E.g. HDPE.BLUE



RED



ORANGE




YELLOW



GREEN



BLUE




TAN



BLACK

LR-SW-SH-G EXAMPLE DIMENSIONS

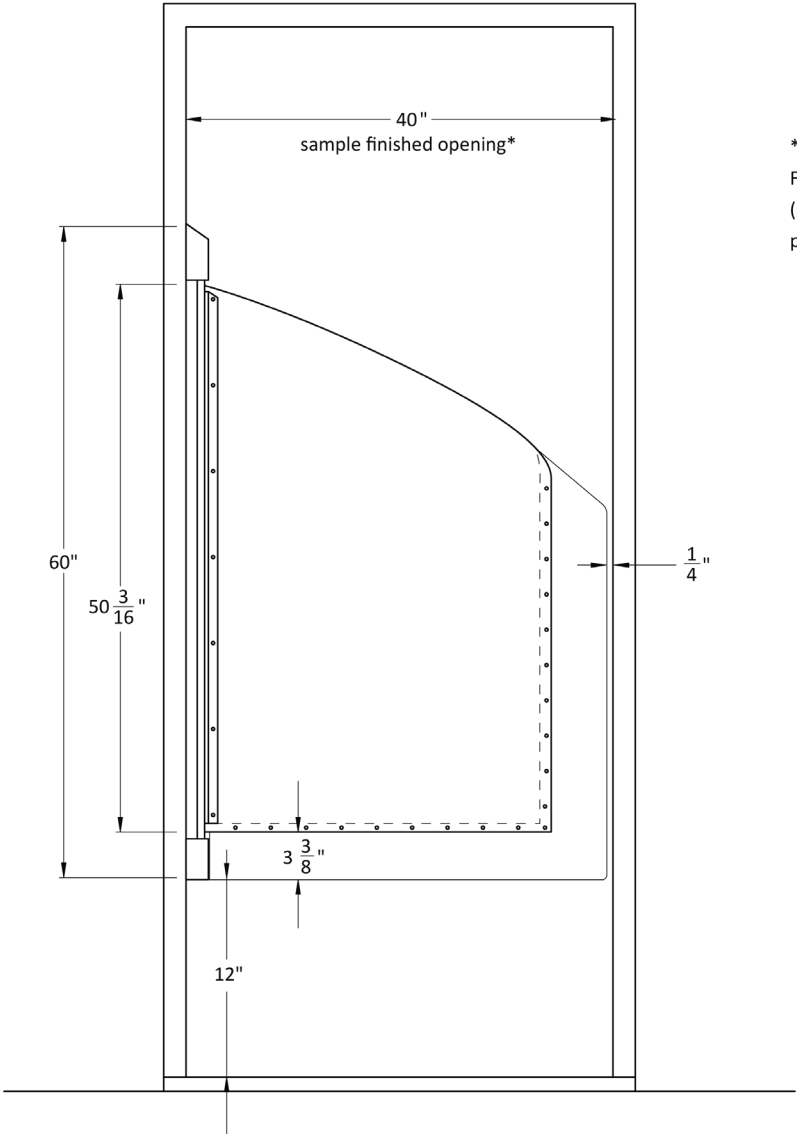

* system can be set up for any finished opening width
For openings 42" or wider, specify "PD" for pair of doors
(panels will be sized based on finished opening width
provided leaving a gap of 1/4" between the two doors)

Standard hinge is 60" tall.
72" and 78" tall hinges available as
special order (door panels are
62 3/16" and 68 3/16" respectively)

**Other door heights are available,
please call for assistance.**

HOW TO SPECIFY

LR-SW-SH-G.FINISHEDOPENINGWIDTH.DOOR

LR-SW-SH-G (Standard)
LR-SW-SH-G-DS (Double
Sloped)

FINISHED OPENING WIDTH

Cased opening frame
dimension (inches)

DOOR MATERIAL

- FP500 Frosted Polycarbonate (1/2" thick)

EXAMPLES

LR-SW-SH-G | Frosted Polycarbonate Standard

E.g. LR-SW.36.FP500

LR-SW-SH-G-DS | Frosted Polycarbonate Double Slope Door

E.g. LR-SW-DS.36.FP500

LR-SW-SH-G | HDPE Plastic Door Color

E.g. LR-SW.40.HDPE.BLUE

LR-SW-SH-G | Wood Grain Plastic Door

E.g. LR-SW.42.WGP

NOTES

- Custom system heights available, please call for assistance.

ACCURATE LOCK & HARDWARE
MANUFACTURERS OF LOCKS AND
CUSTOM ARCHITECTURAL HARDWARE

1 Annie Place | Stamford, CT 06902

P: 203.348.8865

F: 203.348.5234

E: sales@accuratelockandhardware.com

www.accuratelockandhardware.com

AMERICAN CRAFTED
— SINCE 1972 —