Screw Pack

(1) Spindle



(1) 6500 Spring
(4) 8-32 post
(8) 8-32 x $\frac{3}{4}$ Oval Head Screws
(4) 12-24 Flat Head Combo Screws

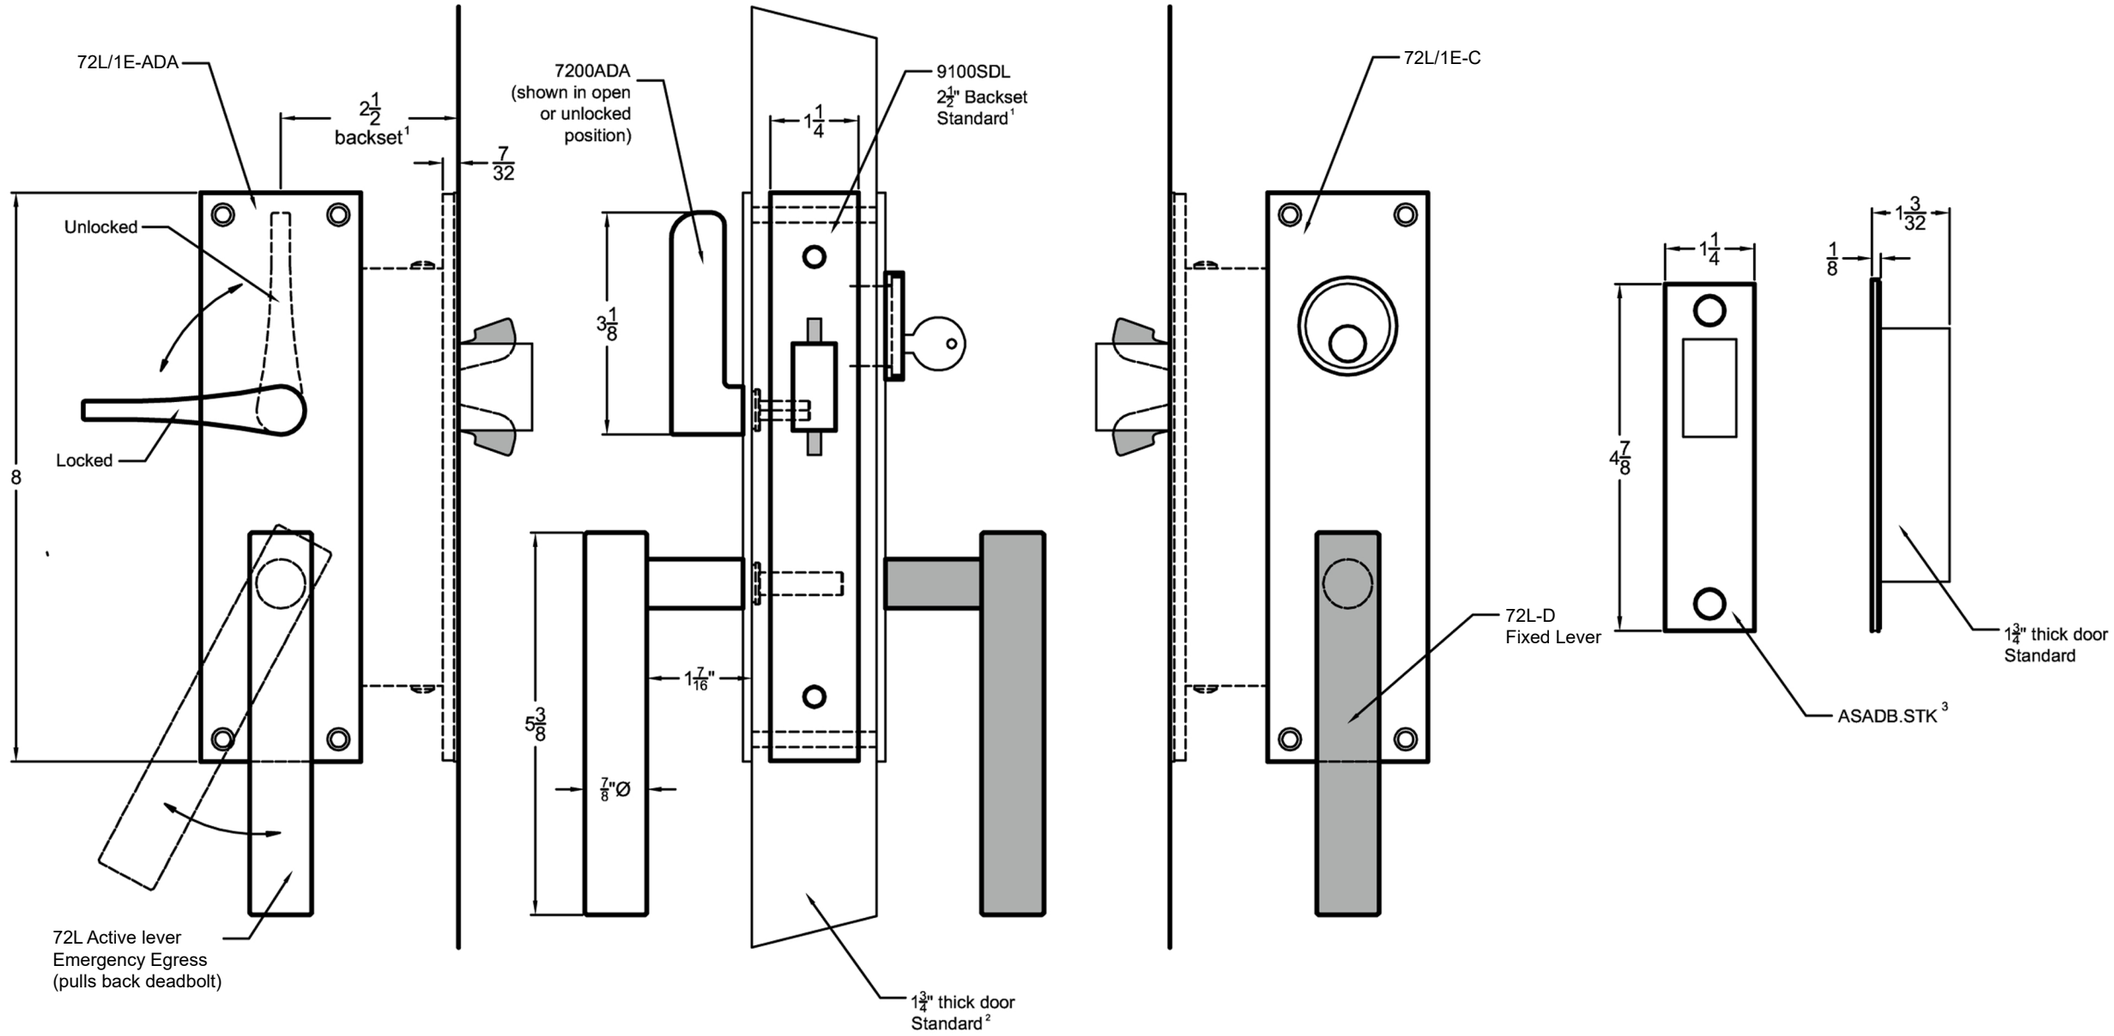

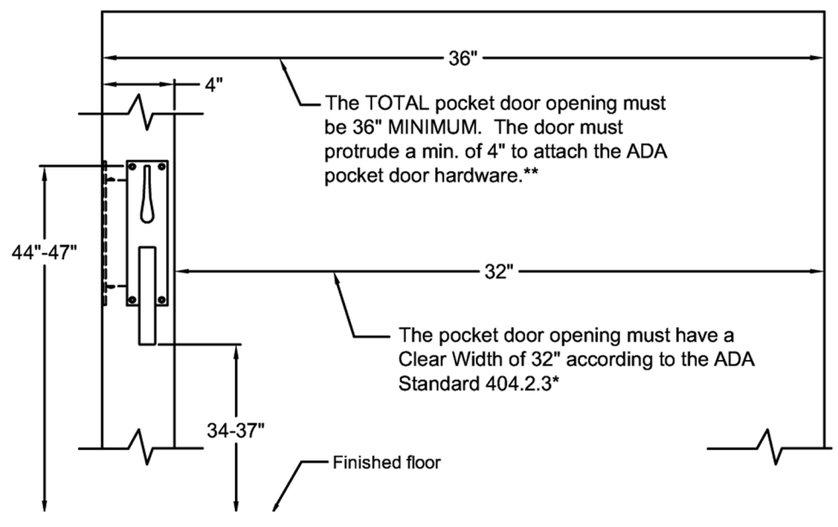

* The ADA Standard 404.2.3* is from the Dept of Justice ADA Publication of Sept 15, 2010. Accurate Lock and Hardware Co. LLC recommends verification of all State and Federal standards applicable for a particular project.

** The total opening has to be 4" greater than the Federal "Clear Width" dimension to work properly

*** The Bottom of the 72L/72L-D lever must be installed w/34"min-37" from the finished floor. This will give 44-47" (the max is 48") from the finished floor to top of 7200ADA handle, thus meeting Code 404.2.7.

1. 9100SDL also available in $2\frac{3}{4}$, $3\frac{3}{4}$", 5, and 6" backsets.
2. Please advise if the door thickness differs from $1\frac{3}{4}$".
3. The ADADB.STK Strike is installed $\frac{3}{8}$" above the centerline of the lock - See Template #T-9100ADAL-3 and the catalog page for additional information

ACCURATE
LOCK & HARDWARE
AMERICAN CRAFTED SINCE 1972

9100ADAL-3.1E
ADA Sliding / Pocket Door

Spec.9100ADAL-3.1E

P: 203.348.8865 W: accuratelockandhardware.com