

## FLEXIBLES CHAUFFAGE



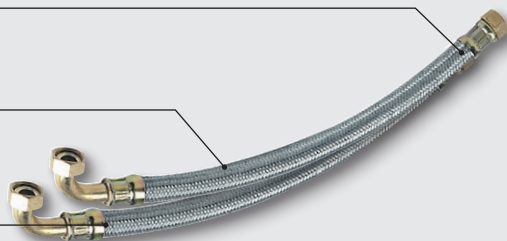
RACCORD EN LAITON




TRESSE GALVANISÉE



TUYAU EN EPDM

APPLICATION  
Chauffage

- Rapide et facile à monter et/ou à démonter
- Tresse galvanisée
- Température max : +90°C
- Pression max : 10 bar

Flexible droit  
2 écrous tournants

RÉF. ÉCROU DN LG. MM COND PCB

20/27					
5654-50	20/27	20	500	PA	5
5654-70	20/27	20	700	PA	5
5654-10	20/27	20	1 000	PA	5
26/34					
5655-50	26/34	26	500	PA	5
5655-70	26/34	26	700	PA	5
5655-10	26/34	26	1 000	PA	5
33/42					
5656-50	33/42	33	500	PA	5
5656-70	33/42	33	700	PA	5
5656-10	33/42	33	1 000	PA	5
40/49					
5657-50	40/49	40	500	PA	5
5657-70	40/49	40	700	PA	5
5657-10	40/49	40	1 000	PA	5
50/60					
5658-50	50/60	50	500	PA	5
5658-70	50/60	50	700	PA	5
5658-10	50/60	50	1 000	PA	5

	DN 20	DN 26	DN 33	DN 40	DN 50
TEMPÉRATURE MAX.	+90 °C				
PRESSION MAX. (BAR)	10				
Ø INTÉRIEUR MM	20	26	33	40	50
Ø EXTÉRIEUR MM TRESSE COMPRISE	28	35	43	50	61
RAYON DE COURBURE MM	112	140	172	392	488