


272A - SERRE-JOINTS À POMPE



Description :

- Assemblages précis grâce au serrage sans rotation de la pompe.
- Rail traité et cranté sur chants pour des blocages francs ; rotule inclinable.
- Capacité : 0 --> 1500 mm.
- Présentation : laquée et rail zingué.

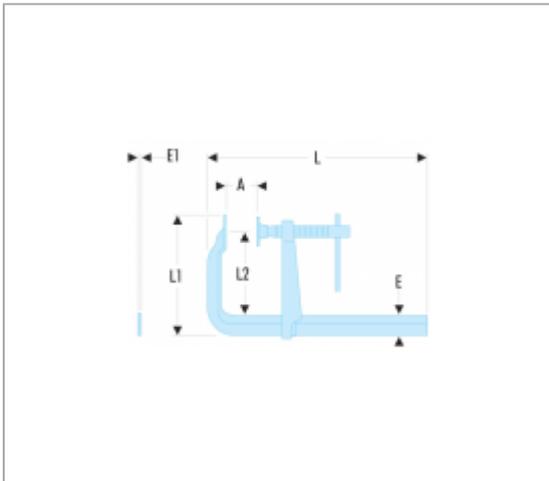

Références :

	A MAXI [MM]	E X E1 [MM]	L [MM]	L1 [MM]	L2 [MM]	OUVERTURE MAXI [MM]	P [MM]	[KG]
272A.300	300	30 x 8	370	150	80	300	80	1,700
272A.400	400	30 x 8	470	150	80	400	80	1,900
272A.500	500	30 x 8	600	150	80	500	80	2,100
272A.600	600	35 x 9	680	180	100	600	100	2,900
272A.800	800	35 x 9	880	180	100	800	100	3,370

	A MAXI [MM]	E X E1 [MM]	L [MM]	L1 [MM]	L2 [MM]	OUVERTURE MAXI [MM]	P [MM]	[KG]
272A.1000	1000	35 x 9	1100	180	100	1000	100	3,840
272A.1200	1200	35 x 9	1300	180	100	1200	100	4,310
272A.1500	1500	35 x 9	1600	180	100	1500	100	5,000