

FLEXIBLES CHAUFFAGE




RACCORD EN LAITON



TRESSE GALVANISÉE




TUYAU EN EPDM

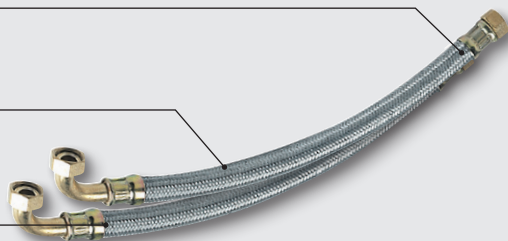

APPLICATION

Chauffage

- Rapide et facile à monter et/ou à démonter
- Tresse galvanisée
- Température max : +90°C
- Pression max : 10 bar



Flexible droit 2 écrous tournants

RÉF. ÉCROU DN LG. MM

			20/27	
5654-50	20/27	20	500	
5654-70	20/27	20	700	
5654-10	20/27	20	1 000	
			26/34	
5655-50	26/34	26	500	
5655-70	26/34	26	700	
5655-10	26/34	26	1 000	
			33/42	
5656-50	33/42	33	500	
5656-70	33/42	33	700	
5656-10	33/42	33	1 000	
			40/49	
5657-50	40/49	40	500	
5657-70	40/49	40	700	
5657-10	40/49	40	1 000	
			50/60	
5658-50	50/60	50	500	
5658-70	50/60	50	700	
5658-10	50/60	50	1 000	

	DN 20	DN 26	DN 33	DN 40	DN 50
TEMPÉRATURE MAX.	+90 °C				
PRESSION MAX. (BAR)	10				
Ø INTÉRIEUR MM	20	26	33	40	50
Ø EXTÉRIEUR MM TRESSE COMPRISE	28	35	43	50	61
RAYON DE COURBURE MM	112	140	172	392	488