


Inox A2

62 802  
TYPE ISO 7380VIS TETE BOMBEE SIX PANS CREUX INVIOLEABLE  
AVEC TETON CENTRAL

HEXAGON SOCKET BUTTON HEAD SCREWS WITH PIN

LINSCHRAUBEN MIT INNENSECHSKANT UND SICHERHEITSSTIFT

TORNILLOS DE SEGURIDAD INVIOLEABLES CABEZA ABOMBADA CON ESPIGA

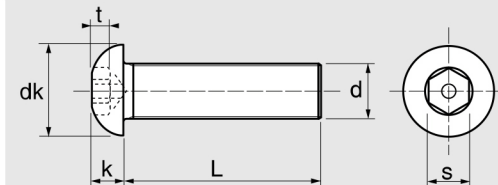

d	M 3	M 4	M 5	M 6	M 8	M 10
dk	5,7	7,6	9,5	10,5	14	17,5
k	1,65	2,2	2,75	3,3	4,4	5,5
s	2	2,5	3	4	5	6
t	1	1,3	1,56	2,08	2,6	3,12
embout/bit	360652	360652,5	360653	360654	360655	360656
clé/key	360852	360852,5	360853	360854	360855	360856

d x L	Code	Cond.	Sur-cond.	kg/100
3X6	628023X6	100	10000	0,045
3X8	628023X8	100	10000	0,053
3X10	628023X10	100	10000	0,062
3X12	628023X12	100	10000	0,069
3X16	628023X16	100	10000	0,087
3X20	628023X20	100	3800	0,104
4X8	628024X8	100	3800	0,104
4X10	628024X10	100	3800	0,122
4X12	628024X12	100	3800	0,138
4X16	628024X16	100	3800	0,162
4X20	628024X20	100	3800	0,189
4X25	628024X25	100	3800	0,232
4X30	628024X30	100	3800	0,269
5X10	628025X10	100	3800	0,210
5X12	628025X12	100	3800	0,233
5X16	628025X16	100	3800	0,288
5X20	628025X20	100	3800	0,328
5X25	628025X25	100	3800	0,384
5X30	628025X30	100	3800	0,449
5X40	628025X40	100	1800	0,570
6X10	628026X10	100	3800	0,310

d x L	Code	Cond.	Sur-cond.	kg/100
6X12	628026X12	100	3800	0,337
6X16	628026X16	100	3800	0,412
6X20	628026X20	100	3800	0,475
6X25	628026X25	100	1800	0,564
6X30	628026X30	100	1800	0,651
6X40	628026X40	100	1800	0,820
6X50	628026X50	100	800	0,987
8X12	628028X12	50	1900	0,692
8X16	628028X16	50	1900	0,827
8X20	628028X20	50	1900	0,956
8X25	628028X25	50	900	1,122
8X30	628028X30	50	900	1,249
8X40	628028X40	50	900	1,552
8X50	628028X50	50	400	1,887
8X60	628028X60	50	400	2,212
10X20	6280210X20	50	900	1,643
10X25	6280210X25	50	900	1,868
10X30	6280210X30	50	400	2,124
10X40	6280210X40	50	400	2,623
10X50	6280210X50	50	400	3,157
10X60	6280210X60	50	400	3,613