

Inox A4

64 408


DIN 7982 - (similar ISO 7050)

VIS A TOLE TETE FRAISEE POZIDRIVE

POZIDRIVE COUNTERSUNK HEAD SELF TAPPING SCREWS

BLECHSCHRAUBEN MIT SENKKOPF UND KREUZSCHLITZ Z

TORNILLOS ROSCA CHAPA CABEZA AVELLANADA POZIDRIVE

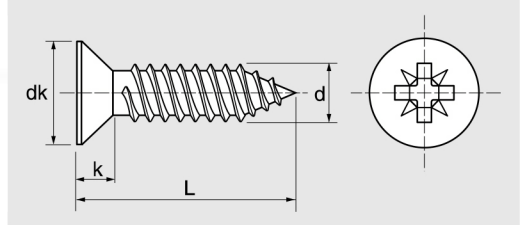

d	2,9 (4)	3,5 (6)	3,9 (7)	4,2 (8)	4,8 (10)	5,5 (12)	6,3 (14)
dk	5,5	6,8	7,5	8,1	9,5	10,8	12,4
k	1,7	2,1	2,3	2,5	3	3,4	3,8
+	1	2	2	2	2	3	3

d x L	Code	Cond.	Sur-cond.	kg/100
2,9X6,5	644082,9X6,5	200	20000	0,025
2,9X9,5	644082,9X9,5	200	20000	0,034
2,9X13	644082,9X13	200	20000	0,044
2,9X16	644082,9X16	200	7600	0,053
2,9X19	644082,9X19	200	7600	0,061
2,9X22	644082,9X22	200	7600	0,070
2,9X25	644082,9X25	200	7600	0,079
3,5X9,5	644083,5X9,5	200	7600	0,051
3,5X13	644083,5X13	200	7600	0,066
3,5X16	644083,5X16	200	7600	0,079
3,5X19	644083,5X19	200	7600	0,092
3,5X22	644083,5X22	200	7600	0,104
3,5X25	644083,5X25	200	7600	0,117
3,5X32	644083,5X32	200	3600	0,162
3,5X38	644083,5X38	200	3600	0,172
3,9X9,5	644083,9X9,5	200	7600	0,066
3,9X13	644083,9X13	200	7600	0,085
3,9X16	644083,9X16	200	7600	0,101
3,9X19	644083,9X19	200	7600	0,117
3,9X22	644083,9X22	200	7600	0,133
3,9X25	644083,9X25	200	3600	0,149
3,9X32	644083,9X32	200	3600	0,202
3,9X38	644083,9X38	200	3600	0,219
4,2X9,5	644084,2X9,5	200	7600	0,080
4,2X13	644084,2X13	200	7600	0,102
4,2X16	644084,2X16	200	7600	0,121
4,2X19	644084,2X19	200	7600	0,140
4,2X22	644084,2X22	200	7600	0,158
4,2X25	644084,2X25	200	3600	0,177
4,2X32	644084,2X32	200	3600	0,235
4,2X38	644084,2X38	200	3600	0,258

d x L	Code	Cond.	Sur-cond.	kg/100
4,2X45	644084,2X45	200	1600	0,301
4,2X50	644084,2X50	200	1600	0,330
4,8X9,5	644084,8X9,5	200	7600	0,114
4,8X13	644084,8X13	200	7600	0,143
4,8X16	644084,8X16	200	7600	0,167
4,8X19	644084,8X19	200	7600	0,192
4,8X22	644084,8X22	200	3600	0,217
4,8X25	644084,8X25	200	3600	0,241
4,8X32	644084,8X32	200	3600	0,335
4,8X38	644084,8X38	200	1600	0,347
4,8X45	644084,8X45	200	1600	0,405
4,8X50	644084,8X50	200	1600	0,442
4,8X60	644084,8X60	200	800	0,524
5,5X16	644085,5X16	200	7600	0,222
5,5X19	644085,5X19	200	3600	0,255
5,5X22	644085,5X22	200	3600	0,288
5,5X25	644085,5X25	200	3600	0,320
5,5X32	644085,5X32	200	1600	0,456
5,5X38	644085,5X38	200	1600	0,461
5,5X45	644085,5X45	200	1600	0,538
5,5X50	644085,5X50	200	1600	0,588
5,5X60	644085,5X60	200	800	0,697
6,3X16	644086,3X16	200	3600	0,311
6,3X19	644086,3X19	200	3600	0,356
6,3X22	644086,3X22	200	3600	0,401
6,3X25	644086,3X25	200	3600	0,446
6,3X32	644086,3X32	200	1600	0,595
6,3X38	644086,3X38	200	1600	0,640
6,3X45	644086,3X45	200	1600	0,745
6,3X50	644086,3X50	200	800	0,814
6,3X60	644086,3X60	100	800	0,964