

Nylon 6.6

82 100


TYPE DIN 963 - TYPE ISO 2009

## VIS TETE FRAISEE FENDUE

SLOTTED COUNTERSUNK HEAD SCREWS

SENKSCHRAUBEN MIT SCHLITZ

TORNILLOS CABEZA AVELLANADA RANURADA

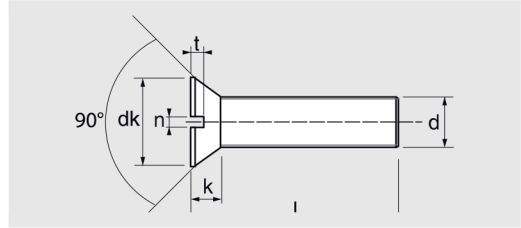

d	M 3	M 4	M 5	M 6	M 8	M 10
dk	5,3	7,14	9,2	11	14,5	18
k	1,65	2,2	2,5	3	4	5
n	0,8	1	1,2	1,6	2	2,5
t (min)	0,6	0,8	1	1,2	1,6	2
Pas	0,5	0,7	0,8	1	1,25	1,5

d x L	Code	Cond.	Sur-cond.	kg/1000
3X10	821003X10	200	20000	0,081
3X12	821003X12	200	7600	0,094
3X16	821003X16	200	7600	0,120
3X20	821003X20	200	7600	0,140
4X10	821004X10	200	7600	0,146
4X12	821004X12	200	7600	0,162
4X16	821004X16	200	7600	0,196
4X20	821004X20	200	7600	0,241
4X25	821004X25	200	3600	0,354
4X30	821004X30	200	3600	0,348
5X10	821005X10	200	7600	0,249
5X12	821005X12	200	7600	0,289
5X16	821005X16	200	7600	0,362
5X20	821005X20	200	3600	0,447
5X25	821005X25	200	3600	0,500
5X30	821005X30	200	3600	0,554
5X40	821005X40	200	800	0,720

d x L	Code	Cond.	Sur-cond.	kg/1000
6X10	821006X10	200	7600	0,341
6X12	821006X12	200	7600	0,383
6X16	821006X16	200	3600	0,490
6X20	821006X20	200	3600	0,588
6X25	821006X25	200	3600	0,720
6X30	821006X30	200	1600	0,830
8X20	821008X20	100	800	1,054
8X25	821008X25	100	800	1,310
8X30	821008X30	100	800	1,500
8X40	821008X40	100	800	2,060
8X50	821008X50	100	800	2,481
10X20	8210010X20	100	800	1,700
10X25	8210010X25	100	800	2,000
10X30	8210010X30	100	800	2,400
10X40	8210010X40	100	400	3,045
10X50	8210010X50	50	400	3,620