

82H - CLÉS MÂLES COURTES EN POUCES




Normes :


ASME B18.3


Description :

- Fabriquée en acier au silicium.
- Présentation : phosphatée.

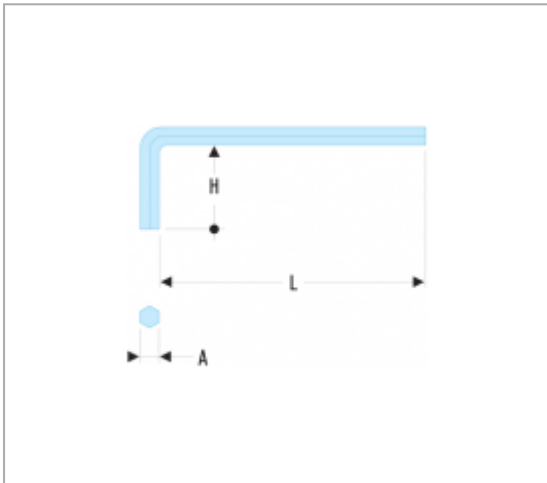

Références :

	A ["]	H [MM]	L [MM]	[G]
82H.050	0.5	12	38	0.4
82H.3/64	3/64	12	38	0.5
82H.1/16	1/16	13	45	0.7
82H.5/64	5/64	16	50	2
82H.3/32	3/32	17	62	3
82H.7/64	7/64	18	60	4
82H.1/8	1/8	20	65	6
82H.9/64	9/64	22	66	8

	A ["]	H [MM]	L [MM]	[G]
82H.5/32	5/32	25	70	10
82H.3/16	3/16	28	80	16
82H.7/32	7/32	32	90	24
82H.1/4	1/4	32	90	33
82H.5/16	5/16	36	100	59
82H.3/8	3/8	40	112	90
82H.7/16	7/16	42	118	135
82H.1/2	1/2	45	125	200
82H.9/16	9/16	55	140	273
82H.5/8	5/8	60	160	383
82H.11/16	11/16	63	170	540
82H.3/4	3/4	70	175	623
82H.7/8	7/8	80	200	955
82H.1'	1'	90	235	1500