

Inox A2


62 431
DIN 7504 M

VIS AUTOPERCEUSES TETE CYLINDRIQUE CARREE

SQUARE PAN HEAD SELF DRILLING SCREWS

BOHRSCHRAUBEN MIT FLACHKOPF UND INNENVIERKANT

TORNILLOS AUTOTALADRANTES CABEZA CILINDRICA CUADRADA

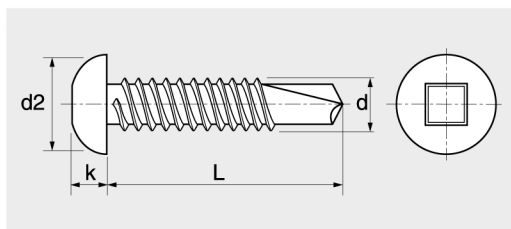

d	3,5 (6)	3,9 (7)	4,2 (8)	4,8 (10)
d2	6,9	7,5	8,2	9,5
k	2,6	2,8	3,05	3,55
●	1	2	2	2
Capacité de perçage	2	3	3	4

d x L	Code	Cond.	Sur-cond.	kg/100
3,5X9,5	624313,5X9,5	200	20000	0,104
3,5X13	624313,5X13	200	7600	0,119
3,5X16	624313,5X16	200	7600	0,132
3,5X19	624313,5X19	200	7600	0,144
3,5X25	624313,5X25	200	7600	0,170
3,9X13	624313,9X13	200	7600	0,129
3,9X16	624313,9X16	200	7600	0,148
3,9X19	624313,9X19	200	7600	0,167
3,9X22	624313,9X22	200	7600	0,200
3,9X25	624313,9X25	200	7600	0,205
3,9X32	624313,9X32	200	3600	0,232
3,9X38	624313,9X38	200	3600	0,279
4,2X13	624314,2X13	200	7600	0,183
4,2X16	624314,2X16	200	7600	0,170
4,2X19	624314,2X19	200	7600	0,190
4,2X22	624314,2X22	200	3600	0,239
4,2X25	624314,2X25	200	3600	0,257

d x L	Code	Cond.	Sur-cond.	kg/100
4,2X32	624314,2X32	200	3600	0,264
4,2X38	624314,2X38	200	3600	0,339
4,2X45	624314,2X45	200	1600	0,382
4,2X50	624314,2X50	200	1600	0,414
4,8X13	624314,8X13	200	7600	0,225
4,8X16	624314,8X16	200	7600	0,310
4,8X19	624314,8X19	200	3600	0,335
4,8X22	624314,8X22	200	3600	0,359
4,8X25	624314,8X25	200	3600	0,384
4,8X32	624314,8X32	200	3600	0,396
4,8X38	624314,8X38	200	1600	0,491
4,8X45	624314,8X45	200	1600	0,548
4,8X50	624314,8X50	200	1600	0,589
4,8X60	624314,8X60	200	800	0,671
4,8X70	624314,8X70	200	800	0,754
4,8X80	624314,8X80	200	800	0,836



Perce seulement l'aluminium / Drills only aluminium

Informations d'utilisation en début de chapitre / Using instructions: see page 183