


Rondelles
 traitées 32-35 HRC (300HV)
 DIN 6916
 Brut

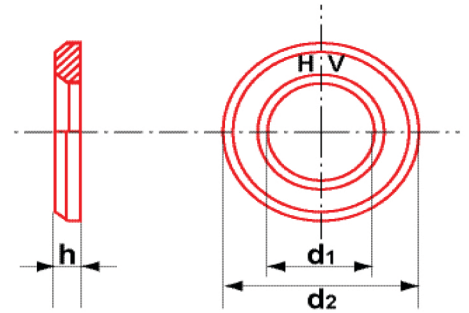

ø	12	14	16	18	20	22	24	27	30	33	36	39	42
d1	13	15	17	19	21	23	25	28	31	34	37	40	43
d2	24	28	30	34	37	39	44	50	56	60	66	72	78
h	3	3	4	4	4	4	4	5	5	5	6	6	6