

## 82H - CLÉS MÂLES COURTES MÉTRIQUES




### Normes :


NF ISO 2936, ISO 2936, DIN ISO 2936, ASME B18.3.2M


### Description :

- Fabriquée en acier au silicium.
- Présentation : phosphatée.

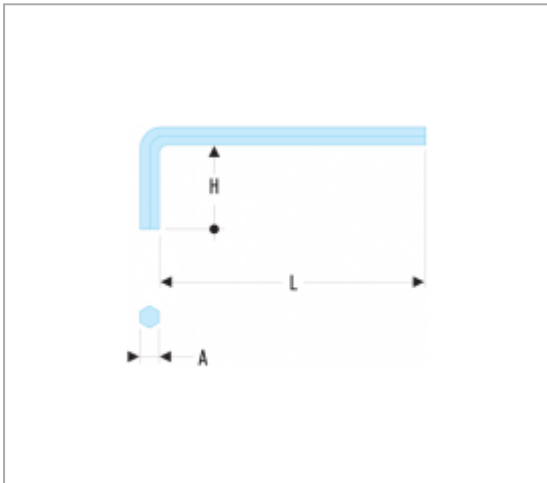

### Références :

	A [MM]	H [MM]	L [MM]	[G]
82H.0,9	0.9	12	38	0.3
82H.1,3	1.3	13	45	0.7
82H.1,5	1.5	13	45	0.9
82H.2	2	16	50	2
82H.2,5	2.5	17	62	3
82H.3	3	20	65	5
82H.3,5	3.5	22	66	8
82H.4	4	25	70	10

	A [MM]	H [MM]	L [MM]	[G]
82H.4,5	4.5	26	75	15
82H.5	5	28	80	20
82H.6	6	32	90	30
82H.7	7	34	95	45
82H.8	8	36	100	60
82H.9	9	38	105	80
82H.10	10	40	112	100
82H.11	11	42	118	130
82H.12	12	45	125	165
82H.13	13	50	135	205
82H.14	14,0	55	140	260
82H.15	15,0	58	150	310
82H.16	16,0	60	154	370
82H.17	17,0	63	160	440
82H.18	18,0	66	170	540
82H.19	19,0	70	180	640
82H.22	22,0	80	200	950
82H.23	23,0	85	210	1100
82H.24	24,0	90	224	1300
82H.27	27,0	100	250	1300
82H.32	32,0	125	315	1400