


→ **Accuride 3832/3832DO**

Capacité de charge jusqu'à 45 kg

Schéma de perçage

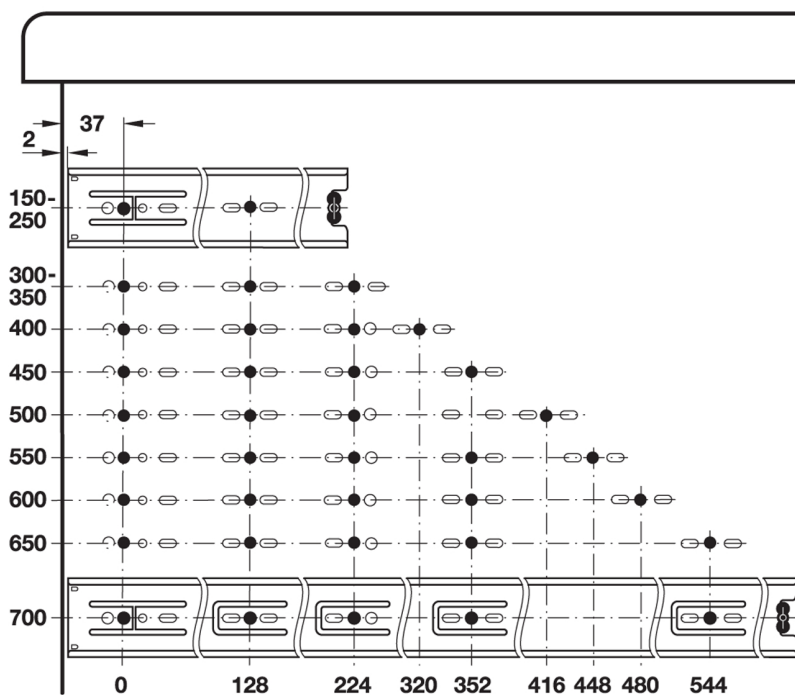

Longueur d'installation L mm	Longueur d'extension AL mm	Zingué clair	Zingué noir
Accuride 3832 avec crantage en position fermée			
150	140	422.41.916	422.41.315
250	243	422.41.925	422.41.325
300	305	422.41.930	422.41.330
350	356	422.41.935	422.41.335
400	406	422.41.940	422.41.340
450	457	422.41.945	422.41.345
500	508	422.41.950	422.41.350
550	559	422.41.955	422.41.355
600	610	422.41.960	422.41.360
700	711	422.41.970	422.41.370



Coulisses avec roulement à billes