

ORGANE DE RÉGLAGE



R14TG






Caractéristiques

Coude de réglage, chromé attente mâle pour adaptateur et douille autoétanche

Douille avec joint autoétanche seulement en 3/8" et 1/2"

TYPE	DIMENSIONS	NUMÉRO SPIRES D'OUVERTURE					
		0,5	1	2	4	6	T.A.
R14X032	3/8" x 3/8"	0,24	0,51	1,13	1,90	-	2,21
R14X033	1/2" x 1/2"	0,34	0,73	1,60	2,52	-	3,16
R14X034	3/4" x 3/4"*	0,35	0,89	1,60	2,52	3,46	6,32
R14X035	1" x 1"*	0,51	1,15	2,12	2,84	4,00	11,80
R14X036	1" 1/4 x 1" 1/4*	0,64	1,46	2,52	3,20	6,70	14,10

* Sans Douille auto étendue

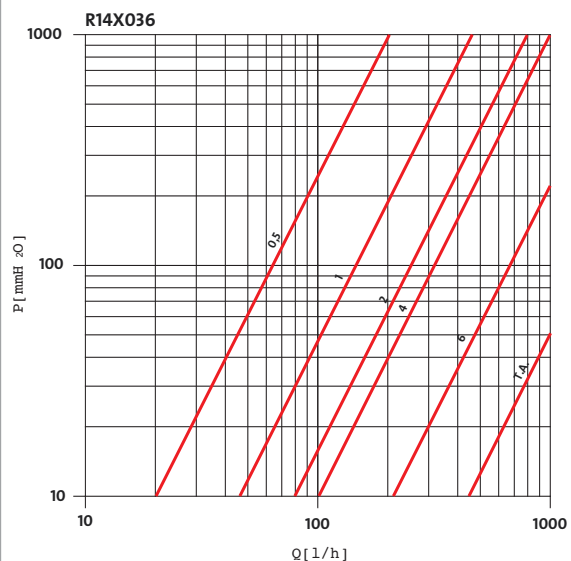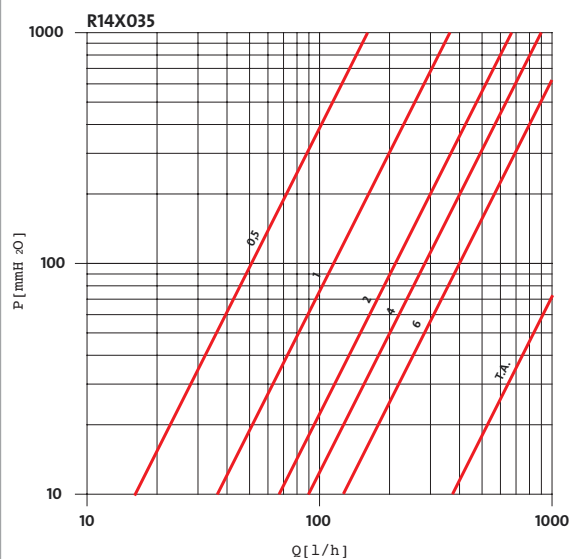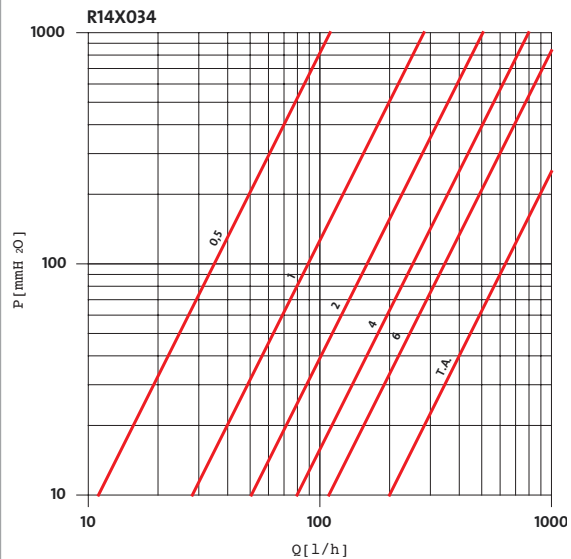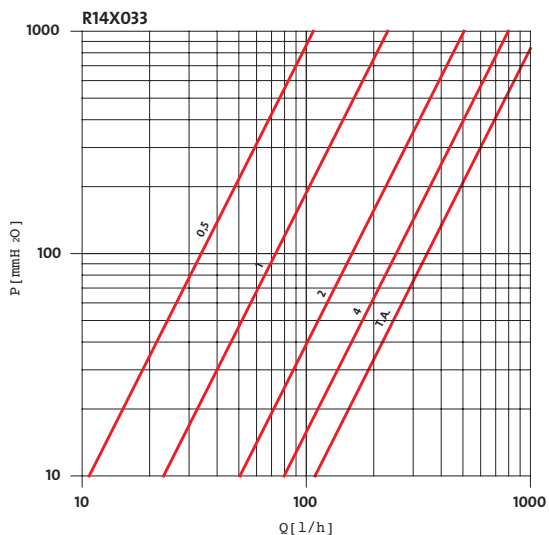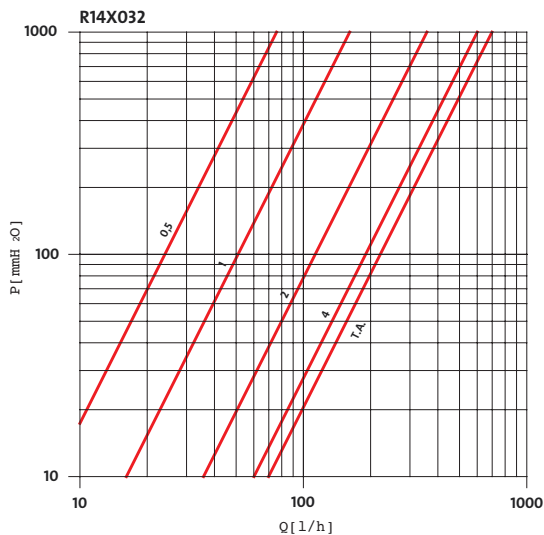

Côtes d'encombrement et dimensions [mm]

R14TG								
TYPE	GxB	H	I	J	K	L	W	Y*
R14X032	3/8" x 3/8"	43	50	19	22	66	27	27
R14X033	1/2" x 1/2"	47	53	21	26	70	30	30
R14X034	3/4" x 3/4"	54	60	23	32	79	38	35
R14X035	1" x 1"	72	68	30	39	90	46	40
R14X035	1" 1/4 x 1" 1/4	80	80	34	49	108	53	46

