

J - DOUILLES 3/8" 12 PANS EN POUCES




Normes :

ASME B107.1

Description :

- Profil OGV® : plus de puissance et de sécurité, préserve les écrous.
- Disponible en jeu sur rack métallique (Réf J.40U : 1/4' --> 11/16').
- Présentation : chromée brillante.

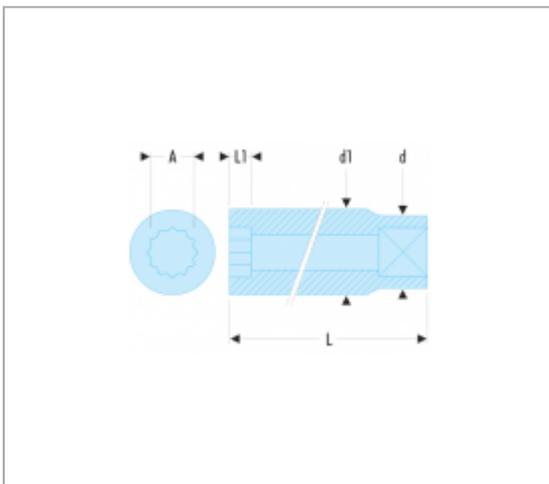

Références :

	A ["]	D [MM]	D1 [MM]	L [MM]	L1 [MM]	12 PANS [MM]	[G]
J.1/4	1/4	17,5	10,0	27	6,0	12	24
J.5/16	5/16	17,5	11,9	27	6,5	12	25
J.3/8	3/8	17,6	14,1	27	7,5	12	26
J.7/16	7/16	17,5	16,0	27	9,0	12	27
J.1/2	1/2	17,5	18,1	30	10,4	12	36
J.9/16	9/16	17,7	19,5	30	10,5	12	34
J.5/8	5/8	20,0	22,0	30	12,0	12	46
J.11/16	11/16	21,0	24,0	33	13,0	12	74

	A ["]	D [MM]	D1 [MM]	L [MM]	L1 [MM]	12 PANS [MM]	[G]
J.3/4	3/4	22,7	26,0	33	14,0	12	76
J.13/16	13/16	23,0	28,0	33	16,0	12	79
J.7/8	7/8	24,7	29,7	33	16,5	12	104
J.15/16	15/16	26,3	31,3	33	16,5	12	136
J.1'	1	28,3	33,3	33	16,5	12	156