


INOX A2 TRS
TÊTE RONDE STANDARD
CONFORME À LA NORME NF EN ISO 15983

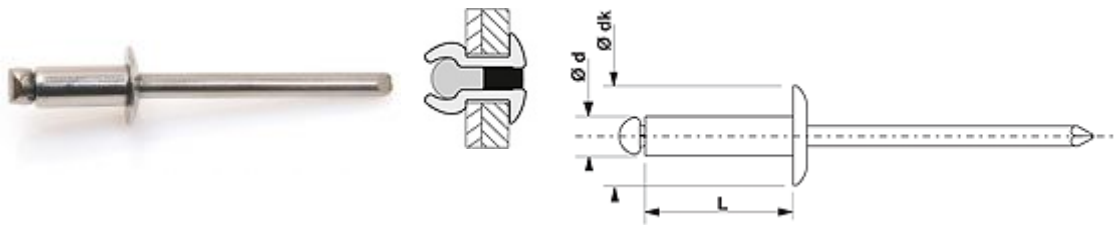

INOX A2 INOX A2

Ø	L	DK						BOÎTE CARTON		BOÎTE PLASTIQUE		BLISTER
mm	mm	mm	mm	mm	N	N	qté	ref	qté	ref	qté	ref
2,4	6	5,0	2,0 - 4,0	2,6	1200	1000	500	105 124 061	400	105 124 061P	-	-
3,0	6	6,0	1,0 - 3,0	3,2	2300	1900	500	105 130 061	-	-	-	-
3,0	8	6,0	3,0 - 5,0	3,2	2300	1900	500	105 130 081	-	-	-	-
3,0	10	6,0	5,0 - 7,0	3,2	2300	1900	500	105 130 101	-	-	-	-
3,0	12	6,0	7,0 - 9,0	3,2	2300	1900	500	105 130 121	-	-	-	-
3,2	6	6,5	1,0 - 3,0	3,4	2500	1900	500	105 132 061	-	-	-	-
3,2	8	6,5	3,0 - 5,0	3,4	2500	1900	500	105 132 081	400	105 132 081P	-	-
3,2	10	6,5	5,0 - 7,0	3,4	2500	1900	500	105 132 101	-	-	-	-
3,2	12	6,5	7,0 - 9,0	3,4	2500	1900	500	105 132 121	-	-	-	-
3,2	14	6,5	9,0 - 11,0	3,4	2500	1900	500	105 132 141	-	-	-	-
3,2	16	6,5	11,0 - 13,0	3,4	2500	1900	500	105 132 161	-	-	-	-
3,2	18	6,5	13,0 - 15,0	3,4	2500	1900	500	105 132 181	-	-	-	-
4,0	6	8,0	0,5 - 2,0	4,2	3500	2700	500	105 140 061	-	-	-	-
4,0	8	8,0	2,0 - 4,0	4,2	3500	2700	500	105 140 081	300	105 140 081P	50	105 140 084 A
4,0	10	8,0	4,0 - 6,0	4,2	3500	2700	500	105 140 101	300	105 140 101P	50	105 140 104 A
4,0	13	8,0	6,0 - 9,0	4,2	3500	2700	500	105 140 131	200	105 140 131P	50	105 140 134 A
4,0	16	8,0	9,0 - 12,0	4,2	3500	2700	500	105 140 161	200	105 140 161P	50	105 140 164 A
4,0	18	8,0	12,0 - 14,0	4,2	3500	2700	500	105 140 181	-	-	-	-
4,0	20	8,0	14,0 - 16,0	4,2	3500	2700	500	105 140 201	-	-	-	-
4,8	6	9,5	0,5 - 1,5	5,0	5000	4000	250	105 148 061	-	-	-	-
4,8	8	9,5	1,0 - 3,0	5,0	5000	4000	250	105 148 081	-	-	-	-
4,8	10	9,5	3,0 - 5,0	5,0	5000	4000	250	105 148 101	200	105 148 101P	50	105 148 104 A
4,8	12	9,5	5,0 - 7,0	5,0	5000	4000	250	105 148 121	200	105 148 121P	50	105 148 124 A
4,8	14	9,5	7,0 - 9,0	5,0	5000	4000	250	105 148 141	200	105 148 141P	50	105 148 144 A
4,8	16	9,5	9,0 - 11,0	5,0	5000	4000	250	105 148 161	150	105 148 161P	50	105 148 164 A
4,8	18	9,5	11,0 - 13,0	5,0	5000	4000	250	105 148 181	-	-	-	-
4,8	20	9,5	13,0 - 15,0	5,0	5000	4000	250	105 148 201	-	-	-	-
4,8	23	9,5	15,0 - 18,0	5,0	5000	4000	250	105 148 231	-	-	-	-
4,8	26	9,5	18,0 - 21,0	5,0	5000	4000	250	105 148 261	-	-	-	-
4,8	30	9,5	21,0 - 25,0	5,0	5000	4000	250	105 148 301	-	-	-	-
6,4	12	12,0	4,0 - 6,0	6,6	8000	6500	250	105 164 121	-	-	-	-
6,4	14	12,0	6,0 - 8,0	6,6	8000	6500	250	105 164 141	-	-	-	-
6,4	18	12,0	10,0 - 12,0	6,6	8000	6500	250	105 164 181	-	-	-	-
6,4	20	12,0	12,0 - 14,0	6,6	8000	6500	250	105 164 201	-	-	-	-
6,4	25	12,0	14,0 - 19,0	6,6	8000	6500	250	105 164 251	-	-	-	-

SUR DEMANDE

Ø 5 - Autres longueurs - Rivets couleurs - Inox A2/Acier - TR - Rivets multi-serrage GOMULTI Inox Ø 3,2 - 4 - 4,8 . Rivets éclatés GOSTAR Inox Ø 4.0-4.8

Application
Chauffage
Air conditionné
Ventilation
Equipement industriel
Machines
Four industriel
Boulangerie
Appareil médical