


Inox A4**64 214****DIN 965 - (similar ISO 7046)****VIS A METAUX TETE FRAISEE POZIDRIVE**

POZIDRIVE COUNTERSUNK HEAD MACHINE SCREWS

POZIDRIVE SENKSCHRAUBEN

TORNILLOS CABEZA AVELLANADA POZIDRIVE

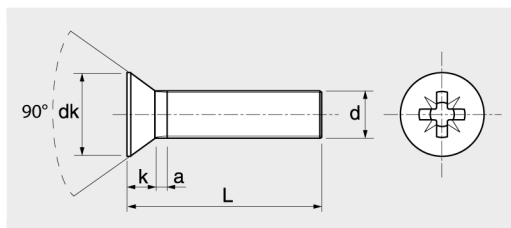

d	M 2	M 2,5	M 3	M 4	M 5	M 6
dk	3,8	4,7	5,6	7,5	9,2	11
k	1,2	1,5	1,65	2,2	2,5	3
a	0,8	0,9	1	1,4	1,6	2
⌀	1	1	1	2	2	3
Pas	0,4	0,45	0,5	0,7	0,8	1

d x L	Code	Cond.	Sur-cond.	kg/100
2X4	642142X4	500	50000	0,012
2X5	642142X5	500	50000	0,014
2X6	642142X6	500	19000	0,015
2X8	642142X8	500	19000	0,019
2X10	642142X10	500	50000	0,023
2X12	642142X12	500	50000	0,027
2X16	642142X16	500	50000	0,034
2X20	642142X20	500	19000	0,042
2,5X4	642142,5X4	500	50000	0,021
2,5X5	642142,5X5	500	50000	0,024
2,5X6	642142,5X6	500	50000	0,027
2,5X8	642142,5X8	500	50000	0,033
2,5X10	642142,5X10	500	19000	0,039
2,5X12	642142,5X12	500	19000	0,045
2,5X16	642142,5X16	500	19000	0,057
2,5X20	642142,5X20	500	19000	0,069
3X4	642143X4	200	20000	0,029
3X5	642143X5	200	20000	0,033
3X6	642143X6	200	20000	0,038
3X8	642143X8	200	20000	0,047
3X10	642143X10	200	20000	0,056
3X12	642143X12	200	7600	0,064
3X16	642143X16	200	7600	0,082
3X20	642143X20	200	7600	0,100
3X25	642143X25	200	7600	0,122
3X30	642143X30	200	7600	0,144
4X6	642144X6	200	20000	0,075
4X8	642144X8	200	20000	0,090
4X10	642144X10	200	7600	0,106

d x L	Code	Cond.	Sur-cond.	kg/100
4X12	642144X12	200	7600	0,122
4X16	642144X16	200	7600	0,153
4X20	642144X20	200	7600	0,184
4X25	642144X25	200	3600	0,222
4X30	642144X30	200	3600	0,261
4X35	642144X35	200	3600	0,299
4X40	642144X40	200	3600	0,336
4X50	642144X50	200	1600	0,410
5X8	642145X8	200	7600	0,145
5X10	642145X10	200	7600	0,170
5X12	642145X12	200	7600	0,195
5X16	642145X16	200	7600	0,244
5X20	642145X20	200	3600	0,294
5X25	642145X25	200	3600	0,355
5X30	642145X30	200	3600	0,420
5X35	642145X35	200	1600	0,476
5X40	642145X40	200	1600	0,539
5X50	642145X50	200	1600	0,665
5X60	642145X60	200	800	0,791
6X10	642146X10	200	7600	0,254
6X12	642146X12	200	7600	0,289
6X16	642146X16	200	3600	0,361
6X20	642146X20	200	3600	0,431
6X25	642146X25	200	3600	0,519
6X30	642146X30	200	1600	0,608
6X35	642146X35	200	1600	0,696
6X40	642146X40	200	1600	0,784
6X50	642146X50	100	800	0,961
6X60	642146X60	100	800	1,138