

## NS.LA - DOUILLES IMPACT 1/2" LONGUES 6 PANS MÉTRIQUES




### Normes :


NF ISO 2725-2, NF ISO 1711-2, ISO 2725-2, ISO 1711-2, DIN 3129, ASME B107.33

### Description :

- Pour votre sécurité, utilisez les douilles impact avec les bagues et goupilles adaptées.

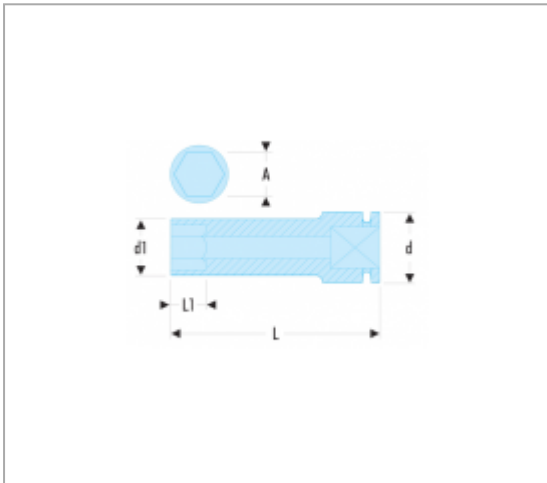

### Références :

	A [MM]	D [MM]	D1 [MM]	H3 [MM]	L [MM]	L1 [MM]	6 PANS [MM]	BA	GA	[G]
NS.8LA	8	24	15,0	13	78	21	6	BA.20B	GA.20B	130
NS.10LA	10	24	17,0	14	78	21	6	BA.20B	GA.20B	150
NS.11LA	11	24	18,0	14	78	21	6	BA.20B	GA.20B	160
NS.12LA	12	24	20,0	14	78	21	6	BA.20B	GA.20B	165
NS.13LA	13	24	21,0	14	78	21	6	BA.20B	GA.20B	185
NS.14LA	14	24	22,0	17	78	21	6	BA.20B	GA.20B	200
NS.15LA	15	24	24,0		79	21	6	BA.20B	GA.20B	210
NS.16LA	16	24	24,0	17	78	21	6	BA.20B	GA.20B	220

	A [MM]	D [MM]	D1 [MM]	H3 [MM]	L [MM]	L1 [MM]	6 PANS [MM]	BA	GA	[G]
NS.17LA	17	26	26,0	17	78	21	6	BA.20B	GA.20B	250
NS.18LA	18	25	28,0	17	78	21	6	BA.20B	GA.20B	275
NS.19LA	19	25	28,0	19	78	21	6	BA.20B	GA.20B	270
NS.21LA	21	25	30,0	24	78	21	6	BA.20B	GA.20B	280
NS.22LA	22	30	32,0	24	78	24	6	BA.25B	GA.25B	290
NS.23LA	23	30	34,0	24	78	24	6	BA.25B	GA.25B	300
NS.24LA	24	30	34,0	24	78	24	6	BA.25B	GA.25B	300
NS.26LA	26	30	36,0	24	78	24	6	BA.25B	GA.25B	305
NS.27LA	27	30	38,0	24	78	24	6	BA.25B	GA.25B	310
NS.28LA	28	30	40,0	24	78	24	6	BA.25B	GA.25B	315
NS.29LA	29	30	40,0	24	78	24	6	BA.25B	GA.25B	330
NS.30LA	30	30	42,0	24	78	24	6	BA.25B	GA.25B	340
NS.32LA	32	30	44,0	24	78	24	6	BA.25B	GA.25B	340